

OPAx237 Single-Supply Operational Amplifiers MicroAmplifier Series

1 Features

- Micro-size, miniature packages:
 - Single: SOT23-5, SO-8
 - Dual: VSSOP-8, SO-8
 - Quad: SSOP-16 (obsolete)
- Low offset voltage: 750 μ V max ($V_S=5V$)
- Wide supply range:
 - Single supply: 2.7V to 36V
 - Dual supply: $\pm 1.35V$ to $\pm 18V$
- Low quiescent current: 350 μ A max
- Wide bandwidth: 1.5MHz

2 Applications

- Battery-powered instruments
- Portable devices
- PCMCIA cards
- Medical instruments
- Test equipment

3 Description

The OPAx237 op amp family is one of Texas Instruments' MicroAmplifier series of miniature products. In addition to small size, these devices feature low offset voltage, low quiescent current, low bias current, and a wide supply range. Single, and dual versions have identical specifications for maximum design flexibility. These devices are designed for single-supply, battery-operated, and space-limited applications, such as PCMCIA cards and other portable instruments.


The OPAx237 series op amps operate from either single or dual supplies. When operated from a single supply, the input common-mode range extends below ground and the output can swing to within 10mV of ground. Dual and quad designs feature completely independent circuitry for lowest crosstalk and freedom from interaction.

Single, dual, and quad versions are offered in space-saving surface-mount packages. The single version is available in the ultra-miniature 5-lead SOT23-5 and SOIC-8 surface-mount packages. The dual version comes in miniature VSSOP-8 and SO-8 surface-mount packages. The quad version is obsolete. The VSSOP-8 has the same lead count as a the SO-8, but at half the size. The SOT23-5 is even smaller, at one-fourth the size of an SOIC-8. All are specified for $-40^{\circ}C$ to $+85^{\circ}C$ operation. A macromodel is available for design analysis.

Device Information

PRODUCT	CHANNELS	PACKAGE ⁽¹⁾
OPA237	Single	D (SOIC, 8)
		DBV (SOT-23, 5)
OPA2237	Dual	D (SOIC, 8)
		DGK (VSSOP, 8)

(1) For more information, see [Section 9](#).

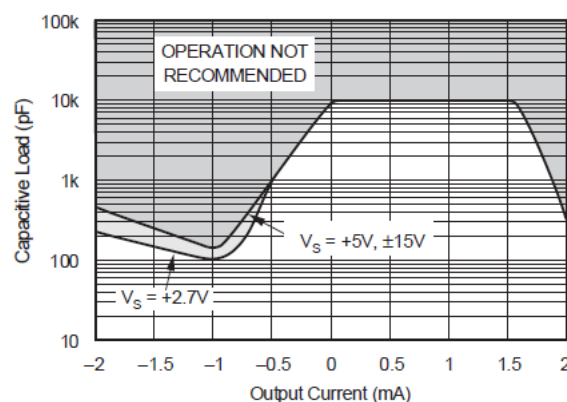

Stability-Capacitive Load vs Output Current



Table of Contents

1 Features	1	5.8 Typical Characteristics.....	8
2 Applications	1	6 Application and Implementation	12
3 Description	1	6.1 Application Information.....	12
4 Pin Configuration and Functions	3	6.2 Typical Application.....	13
5 Specifications	4	7 Device and Documentation Support	14
5.1 Absolute Maximum Ratings.....	4	7.1 Receiving Notification of Documentation Updates....	14
5.2 Recommended Operating Conditions.....	4	7.2 Support Resources.....	14
5.3 Thermal Information OPA237.....	4	7.3 Trademarks.....	14
5.4 Thermal Information OPA2237.....	4	7.4 Electrostatic Discharge Caution.....	14
5.5 Electrical Characteristics for $V_S = 2.7V$	5	7.5 Glossary.....	14
5.6 Electrical Characteristics for $V_S = 5V$	6	8 Revision History	14
5.7 Electrical Characteristics for $V_S = 30V$	7	9 Mechanical, Packaging, and Orderable Information ..	15

4 Pin Configuration and Functions

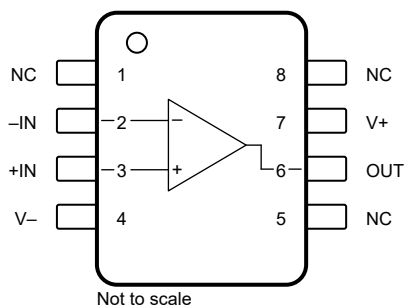


Figure 4-1. OPA237: D Package, 8-Pin SOIC (Top View)

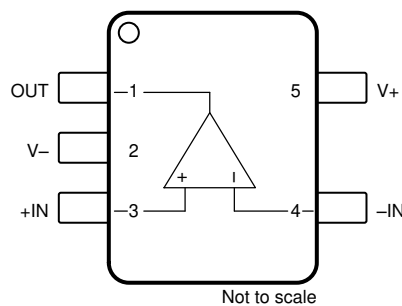


Figure 4-2. OPA237: DBV Package, 5-Pin SOT-23 (Top View)

Table 4-1. Pin Functions: OPA237

NAME	PIN NO.		TYPE	DESCRIPTION
	D (SOIC)	DBV (SOT-23)		
-IN	2	4	Input	Inverting input
+IN	3	3	Input	Noninverting input
OUT	6	1	Output	Output
V-	4	2	Power	Negative (lowest) power supply
V+	7	5	Power	Positive (highest) power supply

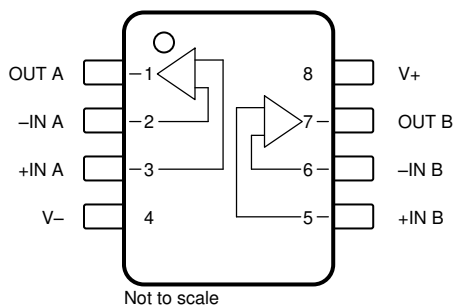


Figure 4-3. OPA2237: D Package, 8-Pin SOIC, and DGK Package, 8-Pin VSSOP (Top View)

Table 4-2. Pin Functions: OPA2237

NAME	PIN NO.		TYPE	DESCRIPTION
-IN A	2		Input	Inverting input, channel A
+IN A	3		Input	Noninverting input, channel A
-IN B	6		Input	Inverting input, channel B
+IN B	5		Input	Noninverting input, channel B
OUT A	1		Output	Output, channel A
OUT B	7		Output	Output, channel B
V-	4		Power	Negative (lowest) power supply
V+	8		Power	Positive (highest) power supply

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

				MIN	MAX	UNIT
V _S	Supply voltage, V _S = (V+) – (V–)				36	V
	Signal input pins	Voltage	Common-mode	(V–) – 0.7	(V+) + 0.7	V
			Differential	–0.7	+0.7	
		Current			±10	mA
I _{SC}	Output short circuit ⁽²⁾			Continuous		
T _A	Operating temperature			–55	125	°C
T _J	Junction temperature				150	°C
T _{stg}	Storage temperature			–55	125	°C

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

- (2) Short-circuit to ground, one amplifier per package.

5.2 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V _S	Supply voltage, V _S = (V+) – (V–)	2.7		36	V
T _A	Operating temperature	–40		85	°C

5.3 Thermal Information OPA237

THERMAL METRIC ⁽¹⁾		OPA237		UNIT
		DBV (SOT-23)	D (SOIC)	
		5 PINS	8 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	115.8	180.4	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	56.4	67.9	°C/W
R _{θJB}	Junction-to-board thermal resistance	56.4	102.1	°C/W
ψ _{JT}	Junction-to-top characterization parameter	12.8	10.4	°C/W
ψ _{JB}	Junction-to-board characterization parameter	55.9	100.3	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

- (1) For information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application note.

5.4 Thermal Information OPA2237

THERMAL METRIC ⁽¹⁾		OPA2237		UNIT
		D (SOIC)	DGK (VSSOP)	
		8 PINS	8 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	126.9	175.6	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	67.1	63.1	°C/W
R _{θJB}	Junction-to-board thermal resistance	70.3	97.2	°C/W
ψ _{JT}	Junction-to-top characterization parameter	18.8	7.8	°C/W
ψ _{JB}	Junction-to-board characterization parameter	69.5	95.5	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

- (1) For information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application note.

5.5 Electrical Characteristics for $V_S = 2.7V$

at $T_A = 25^\circ C$, $V_O = V_S / 2$, and $R_L = 10k\Omega$ connected to $V_S / 2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V _{OS}	Input offset voltage	V _{CM} = 1V			±250	±950	μV
dV _{OS} /dT	Input offset voltage drift	T _A = −40°C to +85°C			±2	±7.5	μV/°C
PSRR	Power-supply rejection ratio	2.7V < V _S < 36V			10	30	μV/V
	Channel separation (dual)				0.5		μV/V
INPUT BIAS CURRENT							
I _B	Input bias current ⁽¹⁾	V _{CM} = 1V			−10	−40	nA
I _{OS}	Input offset current ⁽¹⁾	V _{CM} = 1V			±0.5	±10	nA
NOISE							
	Input voltage noise	f = 0.1Hz to 10Hz			1		μV _{PP}
e _n	Input voltage noise density	f = 1kHz			28		nV/√Hz
i _n	Input current noise density	f = 1kHz			60		pA/√Hz
INPUT VOLTAGE							
V _{CM}	Common-mode voltage			(V−) − 0.2		(V+) − 1.5	V
CMRR	Common-mode rejection ratio	V _{CM} = (V−) − 0.2V to (V+) − 1.5V		71	85		dB
INPUT IMPEDANCE							
Z _{IN}	Input impedance	Differential			5 4		MΩ pF
		Common-mode			5 2		TΩ pF
OPEN-LOOP GAIN							
A _{OL}	Open-loop voltage gain	V _O = 0.55V to 1.7V		75	88		dB
FREQUENCY RESPONSE							
GBW	Gain bandwidth product				1.2		MHz
SR	Slew rate	G = 1			0.45		V/μs
t _S	Settling time	G = −1, C _L = 100pF, 1V step	0.1%		5		μs
			0.01%		8		
OUTPUT							
V _O	Voltage output	R _L = 100kΩ to V−	Positive rail	(V+) − 1	(V+) − 0.75	V	
			Negative rail	(V−) + 0.001	(V−) + 0.05		
		R _L = 100kΩ	Positive rail	(V+) − 1	(V+) − 0.75		
			Negative rail	(V−) + 0.02	(V−) + 0.06		
		R _L = 10kΩ	Positive rail	(V+) − 1	(V+) − 0.75		
			Negative rail	(V−) + 0.2	(V−) + 0.3		
I _{SC}	Short-circuit current	Sourcing		7		mA	
		Sinking		−10			
C _L	Capacitive load drive			See Typical Characteristics			
POWER SUPPLY							
I _Q	Quiescent current per amplifier				150	350	μA

(1) Input bias current specified by design and processing.

5.6 Electrical Characteristics for $V_S = 5V$

at $T_A = 25^\circ\text{C}$, $V_O = V_S / 2$, and $R_L = 10\text{k}\Omega$ connected to $V_S / 2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V _{OS}	Input offset voltage	V _{CM} = 2.5V			±250	±750	μV
dV _{OS} /dT	Input offset voltage drift	T _A = −40°C to +85°C			±2	±5	μV/°C
PSRR	Power-supply rejection ratio	2.7V < V _S < 36V			10	30	μV/V
	Channel separation (dual)				1		μV/V
INPUT BIAS CURRENT							
I _B	Input bias current ⁽¹⁾	V _{CM} = 2.5V			−10	−40	nA
I _{OS}	Input offset current ⁽¹⁾	V _{CM} = 2.5V			±0.5	±10	nA
NOISE							
	Input voltage noise	f = 0.1Hz to 10Hz			1		μV _{PP}
e _n	Input voltage noise density	f = 1kHz			28		nV/√Hz
i _n	Input current noise density	f = 1kHz			60		fA/√Hz
INPUT VOLTAGE							
V _{CM}	Common-mode voltage			(V−) − 0.2		(V+) − 1.5	V
CMRR	Common-mode rejection ratio	V _{CM} = (V−) − 0.2V to (V+) − 1.5V		76	86		dB
INPUT IMPEDANCE							
Z _{IN}	Input impedance	Differential			5 4		MΩ pF
		Common-mode			5 2		TΩ pF
OPEN-LOOP GAIN							
A _{OL}	Open-loop voltage gain	V _O = 0.5V to 4V		75	88		dB
FREQUENCY RESPONSE							
GBW	Gain bandwidth product				1.4		MHz
SR	Slew rate	G = 1			0.45		V/μs
t _S	Settling time	G = −1, C _L = 100pF, 3V step	0.1%		11		μs
			0.01%		16		
OUTPUT							
V _O	Voltage output	R _L = 100kΩ to V−	Positive rail	(V+) − 1.5	(V+) − 0.75		V
			Negative rail		(V−) + 0.001	(V−) + 0.1	
		R _L = 100kΩ	Positive rail	(V+) − 1.5	(V+) − 0.75		
			Negative rail		(V−) + 0.04	(V−) + 0.12	
		R _L =10 kΩ	Positive rail	(V+) − 1.5	(V+) − 0.75		
			Negative rail		(V−) + 0.35	(V−) + 0.6	
I _{SC}	Short-circuit current	Sourcing		8		mA	
		Sinking		−10			
C _L	Capacitive load drive			See Typical Characteristics			
POWER SUPPLY							
I _Q	Quiescent current per amplifier				170	350	μA

(1) Input bias current specified by design and processing.

5.7 Electrical Characteristics for $V_S = 30V$

at $T_A = 25^\circ C$, $V_O = V_S / 2$, and $R_L = 10k\Omega$ connected to $V_S / 2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V _{OS}	Input offset voltage	V _{CM} = V _S /2			±350	±950	μV
dV _{OS} /dT	Input offset voltage drift	T _A = −40°C to +85°C			±2.5	±7	μV/°C
PSRR	Power-supply rejection ratio	2.7V < V _S < 36V			10	30	μV/V
	Channel separation (dual)				1		μV/V
INPUT BIAS CURRENT							
I _B	Input bias current ⁽¹⁾	V _{CM} = V _S /2			−8.5	−40	nA
I _{OS}	Input offset current ⁽¹⁾	V _{CM} = V _S /2			±0.5	±10	nA
NOISE							
	Input voltage noise	f = 0.1Hz to 10Hz			1		μV _{PP}
e _n	Input voltage noise density	f = 1kHz			28		nV/√Hz
i _n	Input current noise density	f = 1kHz			80		fA/√Hz
INPUT VOLTAGE							
V _{CM}	Common-mode voltage			(V−) − 0.2		(V+) − 1.5	V
CMRR	Common-mode rejection ratio	V _{CM} = (V−) to (V+) − 1.5V		80	90		dB
INPUT IMPEDANCE							
Z _{IN}	Input impedance	Differential			5 4		MΩ pF
		Common-mode			5 2		TΩ pF
OPEN-LOOP GAIN							
A _{OL}	Open-loop voltage gain	V _O = (V−) + 1V to (V+) − 1.2V		80	88		dB
FREQUENCY RESPONSE							
GBW	Gain bandwidth product				1.5		MHz
SR	Slew rate	G = 1			0.44		V/μs
t _S	Settling time	G = −1, C _L = 100pF, 10V step	0.1%		20		μs
			0.01%		24		
OUTPUT							
V _O	Voltage output	R _L = 100kΩ	Positive rail	(V+) − 1.2	(V+) − 0.9		V
			Negative rail	(V−) + 0.3	(V−) + 0.5		
		R _L = 10kΩ	Positive rail	(V+) − 1.2	(V+) − 0.9		
			Negative rail	(V−) + 0.85	(V−) + 1		
I _{SC}	Short-circuit current	Sourcing		9.5		mA	
		Sinking		−10			
C _L	Capacitive load drive			See Typical Characteristics			
POWER SUPPLY							
I _Q	Quiescent current per amplifier				200	475	μA

(1) Input bias current specified by design and processing.

5.8 Typical Characteristics

at $T_A = 25^\circ\text{C}$ and $R_L = 10\text{k}\Omega$ (unless otherwise noted)

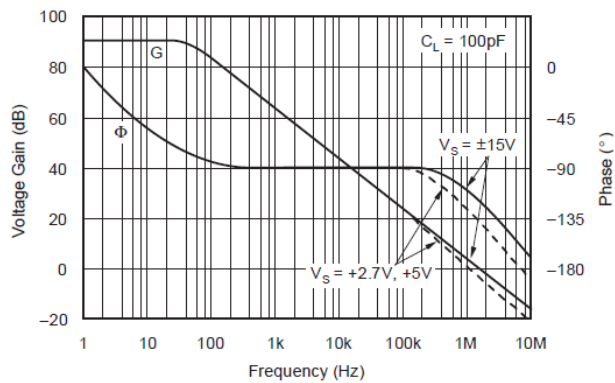


Figure 5-1. Open-Loop Gain and Phase vs Frequency

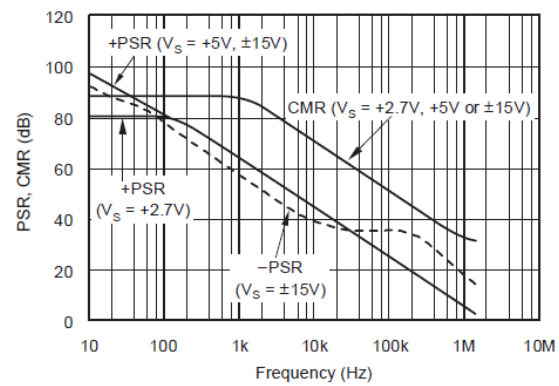


Figure 5-2. Power Supply and Common-Mode Rejection vs Frequency

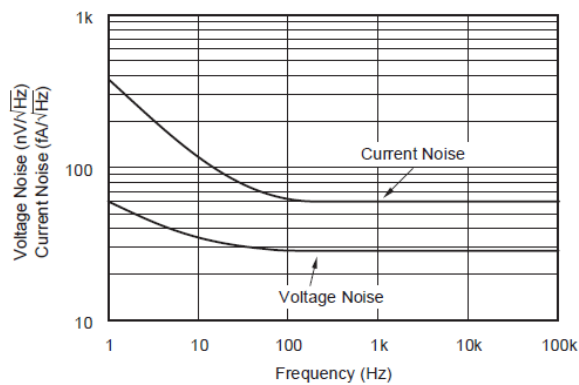


Figure 5-3. Input Noise and Current Noise Spectral Density vs Frequency

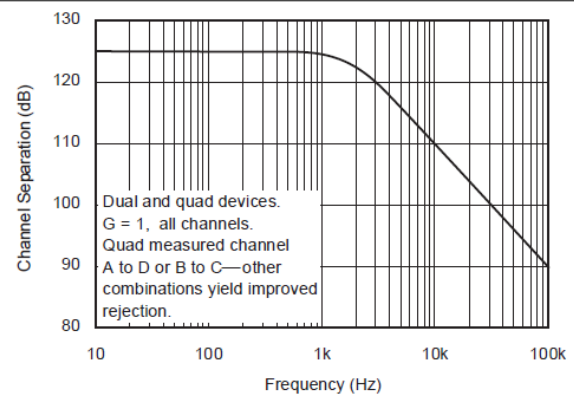


Figure 5-4. Channel Separation vs Frequency

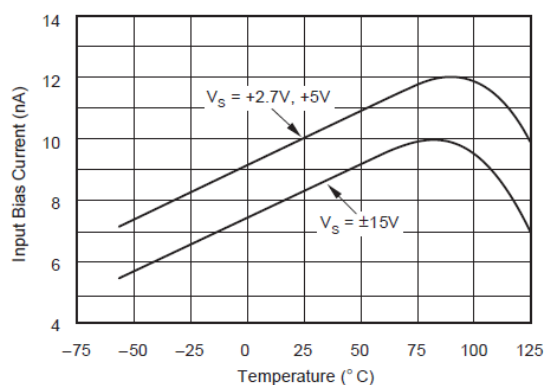


Figure 5-5. Input Bias Current vs Temperature

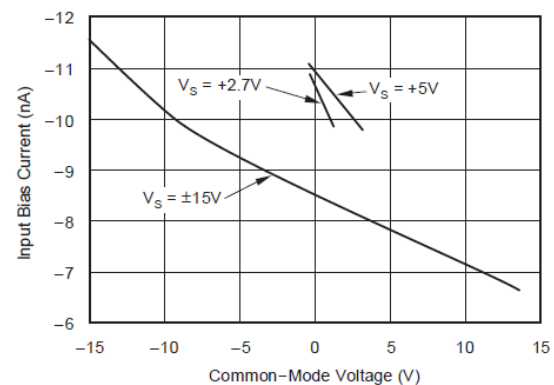


Figure 5-6. Input Bias Current vs Input Common-Mode Voltage

5.8 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$ and $R_L = 10\text{k}\Omega$ (unless otherwise noted)

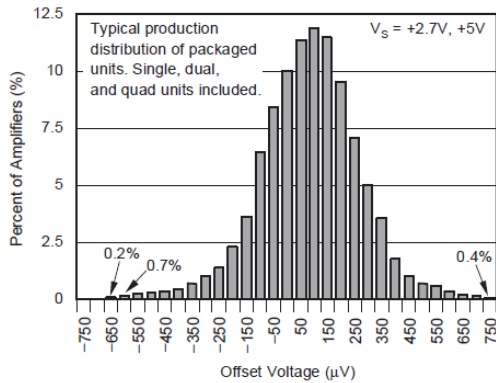


Figure 5-7. Offset Voltage Production Distribution

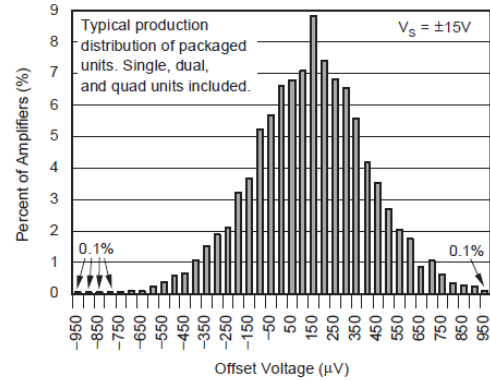


Figure 5-8. Offset Voltage Production Distribution

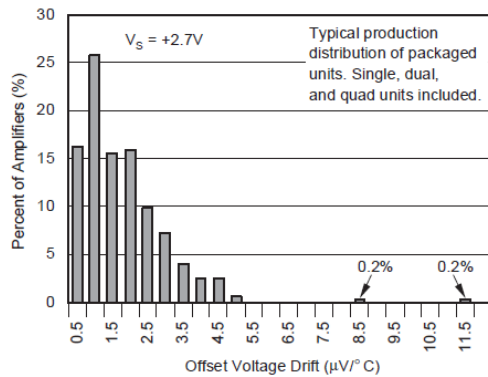


Figure 5-9. Offset Voltage Drift Production Distribution

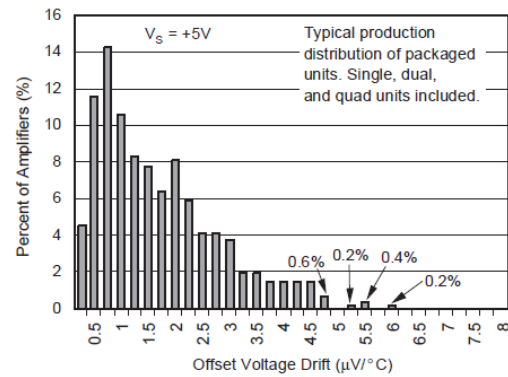


Figure 5-10. Offset Voltage Drift Production Distribution

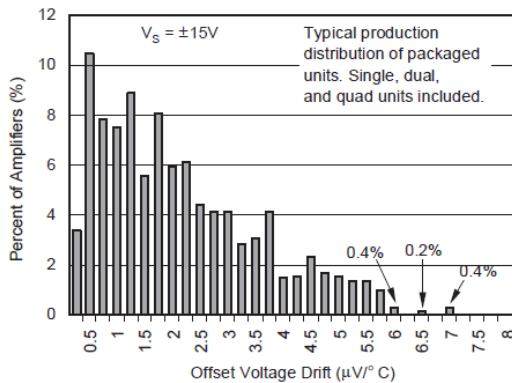


Figure 5-11. Offset Voltage Drift Production Distribution


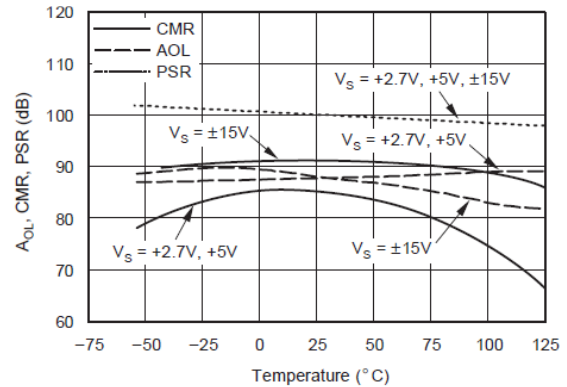


Figure 5-12. A_{OL} , CMR, PSR vs Temperature


5.8 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$ and $R_L = 10\text{k}\Omega$ (unless otherwise noted)

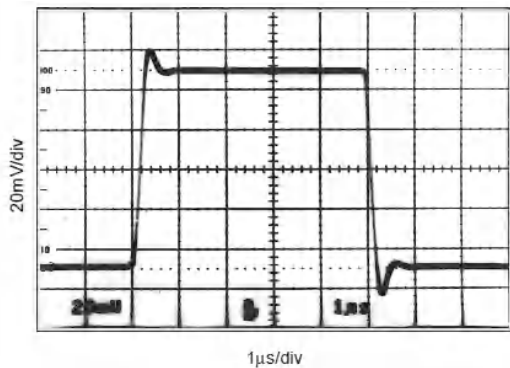


$G = 1$ $C_L = 100\text{pF}$ $V_S = 5\text{V}$

Figure 5-13. Small-Signal Step Response

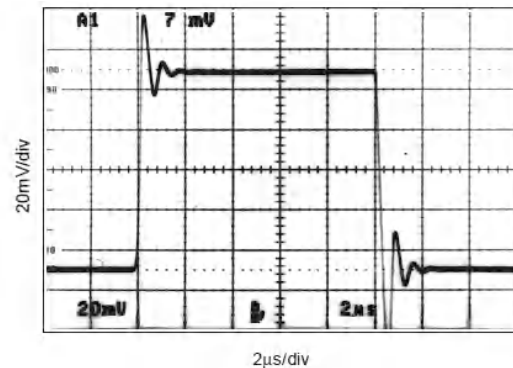

$G = 1$ $C_L = 220\text{pF}$ $V_S = 5\text{V}$

Figure 5-14. Small-Signal Step Response

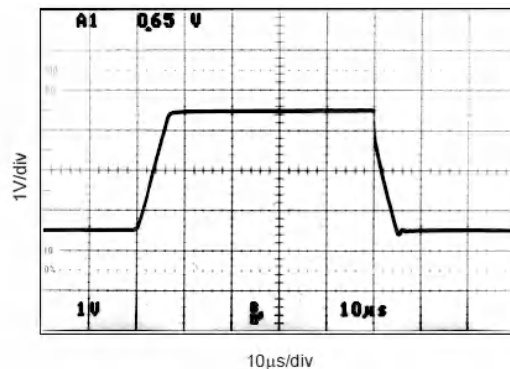

$G = 1$ $C_L = 100\text{pF}$ $V_S = 5\text{V}$

Figure 5-15. Large-Signal Step Response

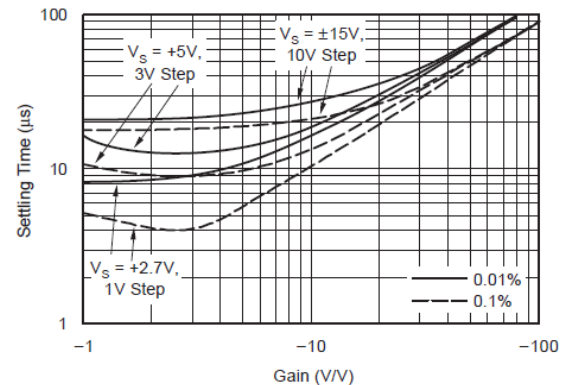


Figure 5-16. Settling Time vs Gain

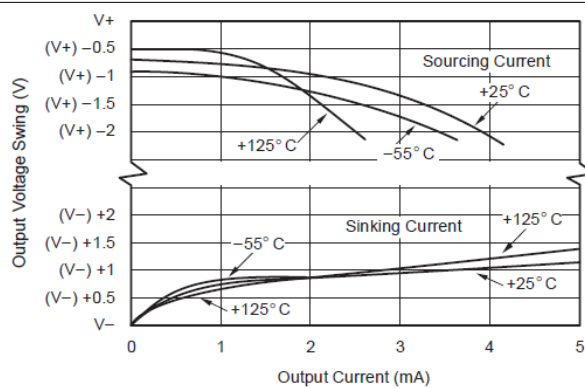


Figure 5-17. Output Voltage Swing vs Output Current

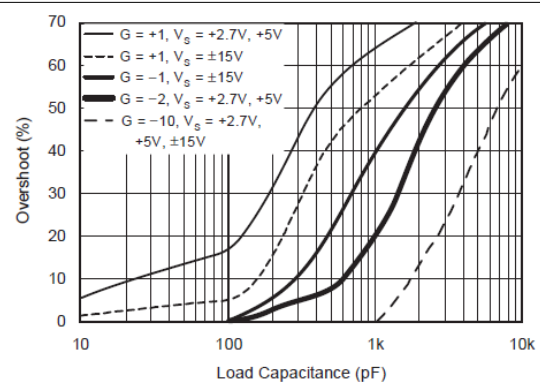


Figure 5-18. Small-Signal Overshoot vs Load Capacitance

5.8 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$ and $R_L = 10\text{k}\Omega$ (unless otherwise noted)

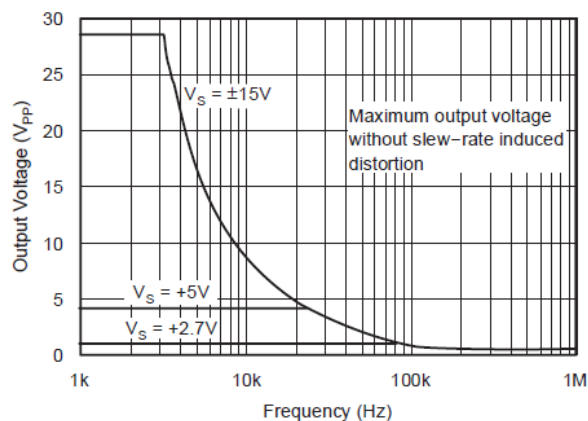


Figure 5-19. Maximum Output Voltage vs Frequency

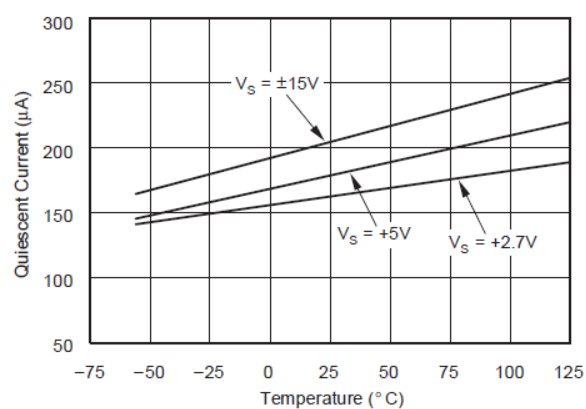


Figure 5-20. Quiescent Current vs Temperature

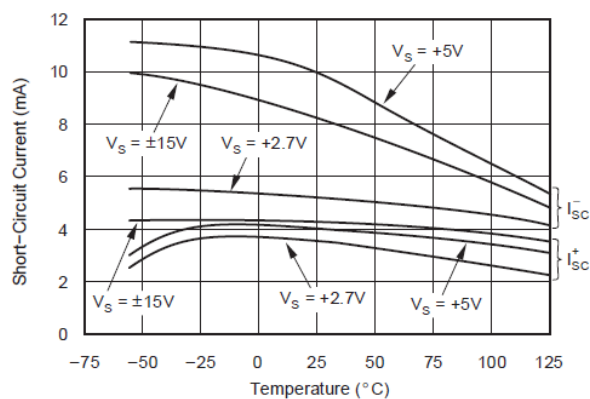


Figure 5-21. Short-Circuit Current vs Temperature

6 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

6.1 Application Information

The OPA237 series op amps are unity-gain stable and an excellent choice for a wide range of general-purpose applications. Bypass the power-supply pins with 10nF ceramic capacitors.

6.1.1 Operating Voltage


OPA237 series op amps operate from single (2.7V to 36V) or dual ($\pm 1.35\text{V}$ to $\pm 18\text{V}$) supplies with excellent performance. Most behavior remains unchanged throughout the full operating voltage range. Parameters that vary significantly with operating voltage are shown in *Typical Characteristics*. Specifications are production tested with 2.7V, 5V, and $\pm 15\text{V}$ supplies.

6.1.2 Output Current and Stability

OPA237 series op amps can drive large capacitive loads. However, under certain limited output conditions, any op amp can become unstable. [Figure 6-2](#) shows the region where the OPA237 has a potential for instability. These load conditions are rarely encountered, especially for single-supply applications. For example, when a 5V supply with a 10k Ω load to $V_S/2$ is used.

OPA237 series op amps remain stable with capacitive loads up to 4,000pF, if sinking current, and up to 10,000pF, if sourcing current. Furthermore, in single-supply applications where the load is connected to ground, the op amp is only sourcing current, and as [Figure 6-2](#) shows, the op amp can drive 10,000pF with output currents up to 1.5mA.

6.2 Typical Application

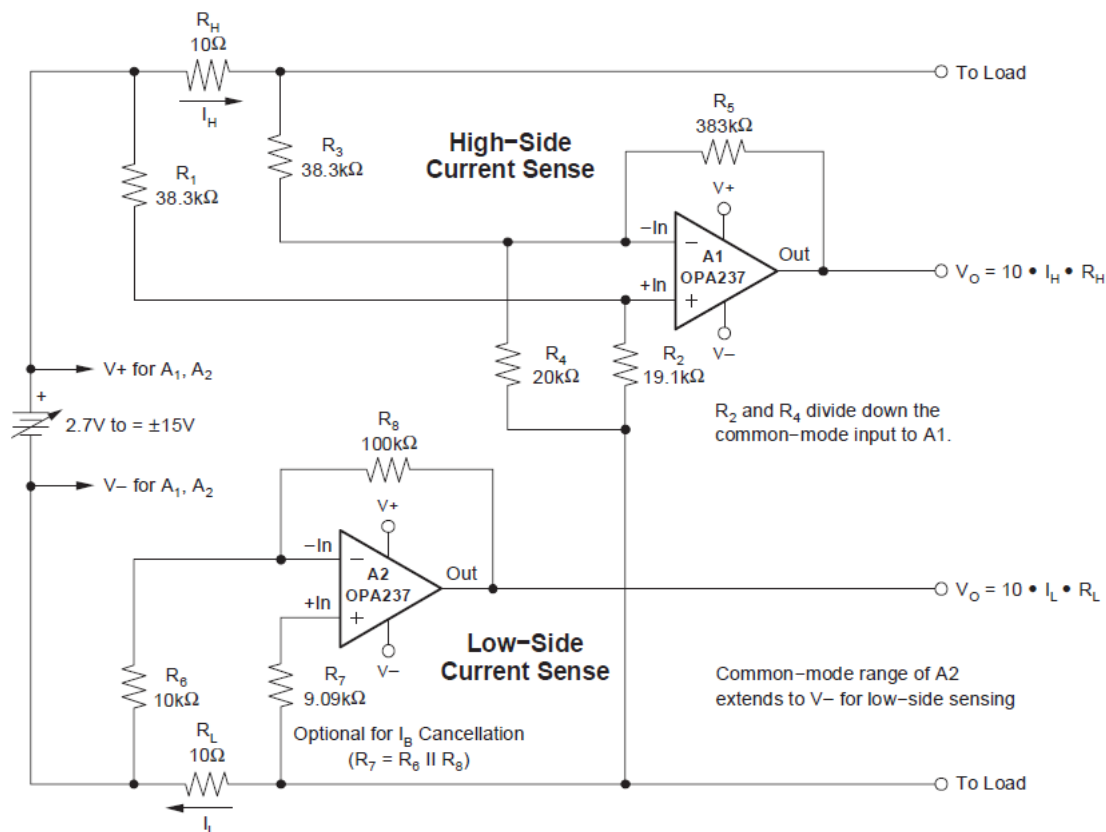

Note: Low-side and high-side sensing circuits can be used independently.

Figure 6-1. Low-Side and High-Side Battery Current Sensing

6.2.1 Application Curve

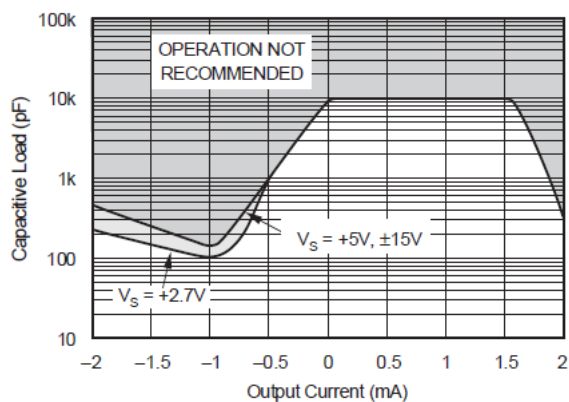


Figure 6-2. Stability-Capacitive Load vs Output Current

7 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

7.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

7.2 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

7.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

7.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

7.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

8 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (February 2007) to Revision B (April 2025)	Page
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1
• Changed quiescent current unit from μV to μA in <i>Features</i>	1
• Updated <i>Pin Configurations and Functions</i> to latest standards and added <i>Pin Functions</i> tables.....	3
• Added input current to <i>Absolute Maximum Ratings</i>	4
• Added <i>Recommended Operating Conditions</i>	4
• Added <i>Thermal Information</i>	4
• Updated junction-to-ambient thermal resistance for OPA237 packages.....	4
• Updated junction-to-ambient thermal resistance for OPA2237 packages.....	4
• Updated all <i>Electrical Characteristics</i> tables to latest format.....	5
• Added test condition $V_O = V_S/2$	5
• Changed maximum input offset voltage from $\pm 750\mu\text{V}$ to $\pm 950\mu\text{V}$	5
• Deleted table note "Specified by wafer-level test to 95% confidence".....	5
• Changed maximum input offset voltage drift from $5\mu\text{V}/^\circ\text{C}$ to $7.5\mu\text{V}/^\circ\text{C}$	5
• Updated table note 1.....	5
• Updated V_{CM} range format to refer to rails.....	5
• Changed minimum common-mode rejection ratio from 75dB to 71dB.....	5
• Changed differential input impedance from $5 \cdot 10^6\Omega$ to $5\text{M}\Omega$	5
• Changed common-mode input impedance from $5 \cdot 10^9\Omega$ to $5\text{T}\Omega$	5
• Changed minimum open-loop voltage gain from 80dB to 75dB.....	5

• Changed test condition for open-loop voltage gain from 0.5V to 0.55V.....	5
• Changed typical slew rate from 0.5V/μs to 0.45V/μs.....	5
• Added V– to negative rail rows and moved positive and negative labels to test conditions for voltage output...	5
• Changed test condition of voltage output for $R_L = 100k\Omega$ from "Ground" to V–.....	5
• Changed maximum voltage output for $R_L = 100k\Omega$ from negative rail from 0.01V to (V–) + 0.05V.....	5
• Updated short circuit current to show separated rows for source and sink.....	5
• Changed short-circuit sourcing current from 3.5mA to 7mA.....	5
• Changed short-circuit sinking current from –5mA to –10mA.....	5
• Changed typical quiescent current from 160μA to 150μA.....	5
• Added test condition $V_O = V_S/2$	6
• Deleted table note "Specified by wafer-level test to 95% confidence".....	6
• Changed channel separation from 0.5μV/V to 1μV/V.....	6
• Updated table note 1.....	6
• Updated V_{CM} range format to refer to rails.....	6
• Changed minimum common-mode rejection ratio for from 78dB to 76dB.....	6
• Changed differential input impedance from $5 \cdot 10^6\Omega$ to $5M\Omega$	6
• Changed common-mode input impedance from $5 \cdot 10^9\Omega$ to $5T\Omega$	6
• Changed typical slew rate from 0.5V/μs to 0.45V/μs.....	6
• Added V– to negative rail rows and moved positive and negative labels to test conditions for voltage output...	6
• Changed test condition of voltage output for $R_L = 100k\Omega$ from "Ground" to V–.....	6
• Changed minimum voltage output from positive rail from (V+) – 1V to (V+) – 1.5V.....	6
• Changed maximum voltage output from negative rail from (V–) + 0.01V to (V–) + 0.1V.....	6
• Changed minimum voltage output from positive rail from (V+) – 1V to (V+) – 1.5V.....	6
• Changed maximum voltage output from negative rail from (V–) + 0.5V to (V–) + 0.6V.....	6
• Updated short circuit current to show separated rows for source and sink.....	6
• Changed short-circuit sourcing current from 4mA to 8mA.....	6
• Added test condition $V_O = V_S/2$	7
• Changed test condition for input offset voltage from $V_{CM} = 0V$ to $V_{CM} = V_S/2$	7
• Deleted table note "Specified by wafer-level test to 95% confidence".....	7
• Changed channel separation from 0.5μV/V to 1μV/V.....	7
• Updated table note 1.....	7
• Changed test condition for input bias current from $V_{CM} = 0V$ to $V_{CM} = V_S/2$	7
• Changed test condition for input offset current from $V_{CM} = 0V$ to $V_{CM} = V_S/2$	7
• Changed input current noise density from 60fA/√Hz to 80fA/√Hz.....	7
• Updated V_{CM} range format to refer to rails.....	7
• Changed differential input impedance from $5 \cdot 10^6\Omega$ to $5M\Omega$	7
• Changed common-mode input impedance from $5 \cdot 10^9\Omega$ to $5T\Omega$	7
• Changed slew rate from 0.5V/μs to 0.44V/μs.....	7
• Changed settling time in 0.1% from 18μs to 20μs.....	7
• Changed settling time in 0.01% from 21μs to 24μs.....	7
• Added V– to negative rail rows and moved positive and negative labels to test conditions for voltage output...	7
• Updated short circuit current to show separated rows for source and sink.....	7
• Changed short-circuit sourcing current from 4.5mA to 9.5mA.....	7
• Changed short-circuit sinking current from –8mA to –10mA.....	7
• Deleted ± sign from quiescent current spec.....	7

9 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA2237EA/250	Last Time Buy	Production	VSSOP (DGK) 8	250 SMALL T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-	B37A
OPA2237EA/2K5	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	Call TI Nipdauag Nipdau	Level-2-260C-1 YEAR	-40 to 85	B37A
OPA2237EA/2K5.A	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 85	B37A
OPA2237EA/2K5.B	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 85	B37A
OPA2237UA	Last Time Buy	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-	OPA 2237UA
OPA2237UA/2K5	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-	(OP2237, OPA) 2237UA
OPA2237UA/2K5.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	(OP2237, OPA) 2237UA
OPA2237UA/2K5.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	(OP2237, OPA) 2237UA
OPA2237UAE4	Active	Production	SOIC (D) 8	75 TUBE	-	Call TI	Call TI	See OPA2237UA	
OPA237NA/250	Last Time Buy	Production	SOT-23 (DBV) 5	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 70	A37A
OPA237NA/3K	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU SN	Level-2-260C-1 YEAR	-40 to 70	A37A
OPA237NA/3K.A	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 70	A37A
OPA237NA/3K.B	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 70	A37A
OPA237NA/3K1G4	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 70	A37A
OPA237NA/3K1G4.A	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 70	A37A
OPA237UA	Last Time Buy	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 70	OPA 237UA
OPA237UA/2K5	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 70	(OP237, OPA) 237UA
OPA237UA/2K5.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 70	(OP237, OPA) 237UA
OPA237UA/2K5.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 70	(OP237, OPA) 237UA

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA2237EA/250	VSSOP	DGK	8	250	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2237EA/2K5	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2237EA/2K5	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2237UA/2K5	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA237NA/250	SOT-23	DBV	5	250	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3
OPA237NA/3K	SOT-23	DBV	5	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
OPA237NA/3K	SOT-23	DBV	5	3000	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3
OPA237NA/3K1G4	SOT-23	DBV	5	3000	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3
OPA237UA/2K5	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

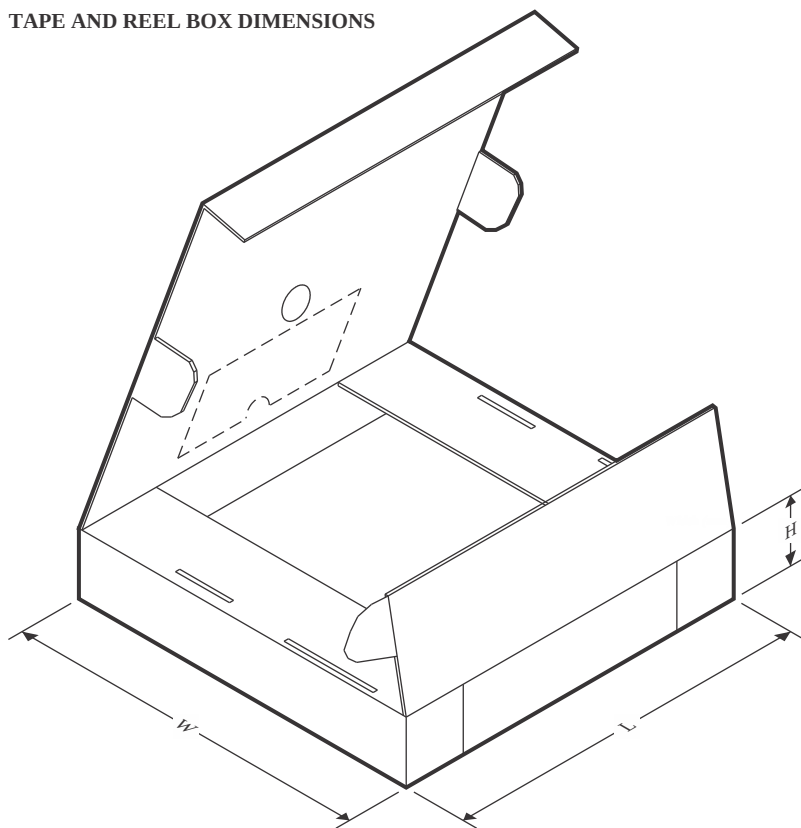

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA2237EA/250	VSSOP	DGK	8	250	366.0	364.0	50.0
OPA2237EA/2K5	VSSOP	DGK	8	2500	366.0	364.0	50.0
OPA2237EA/2K5	VSSOP	DGK	8	2500	353.0	353.0	32.0
OPA2237UA/2K5	SOIC	D	8	2500	353.0	353.0	32.0
OPA237NA/250	SOT-23	DBV	5	250	180.0	180.0	18.0
OPA237NA/3K	SOT-23	DBV	5	3000	210.0	185.0	35.0
OPA237NA/3K	SOT-23	DBV	5	3000	180.0	180.0	18.0
OPA237NA/3K1G4	SOT-23	DBV	5	3000	180.0	180.0	18.0
OPA237UA/2K5	SOIC	D	8	2500	353.0	353.0	32.0

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
OPA2237UA	D	SOIC	8	75	506.6	8	3940	4.32
OPA237UA	D	SOIC	8	75	506.6	8	3940	4.32




D0008A

PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

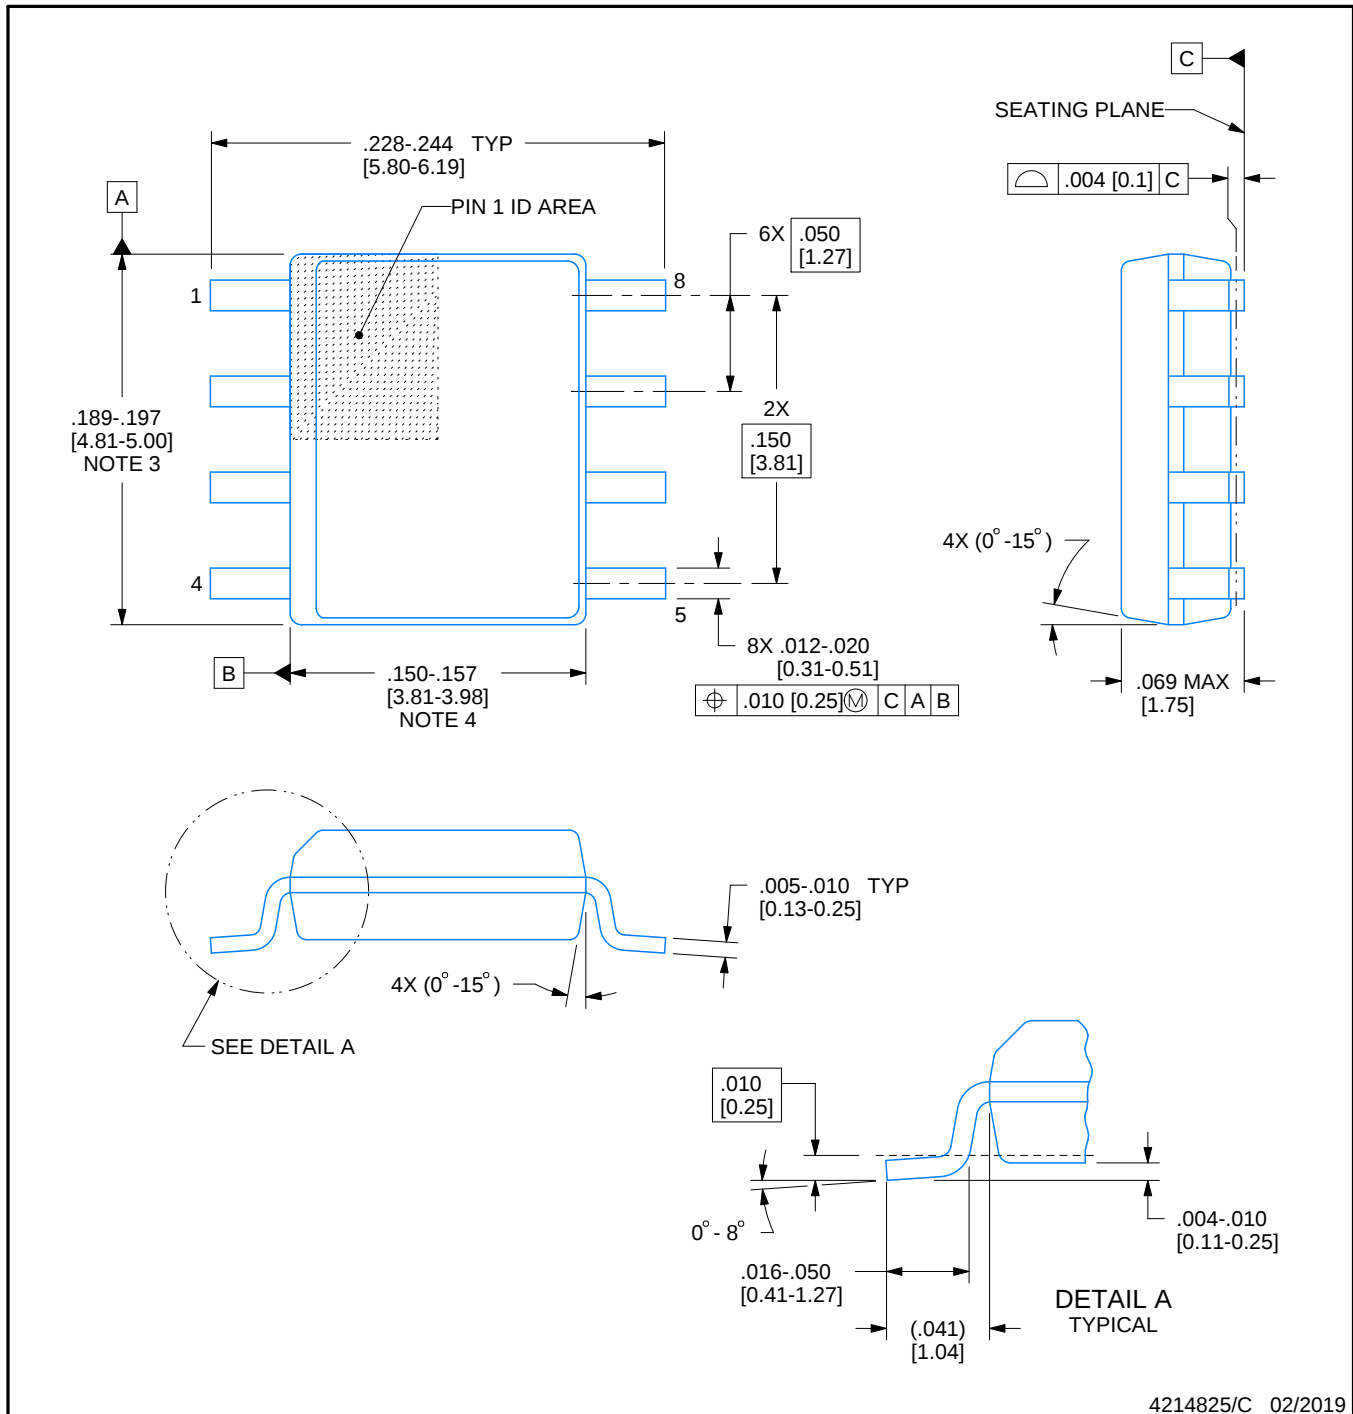


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.


D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

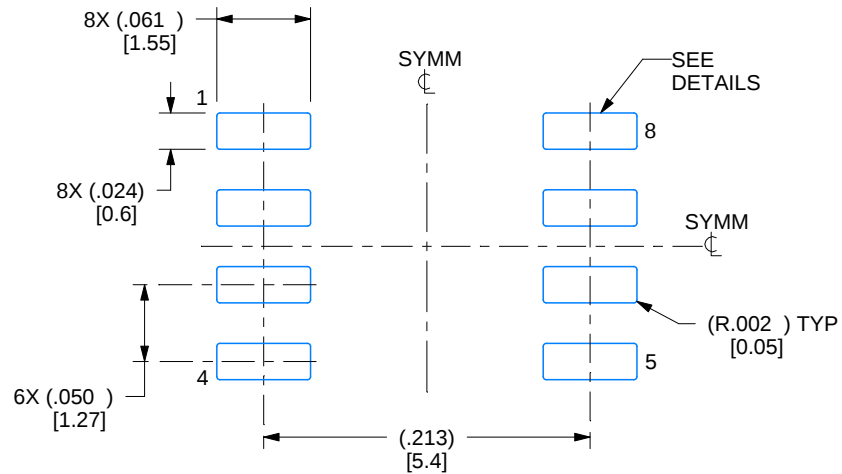

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

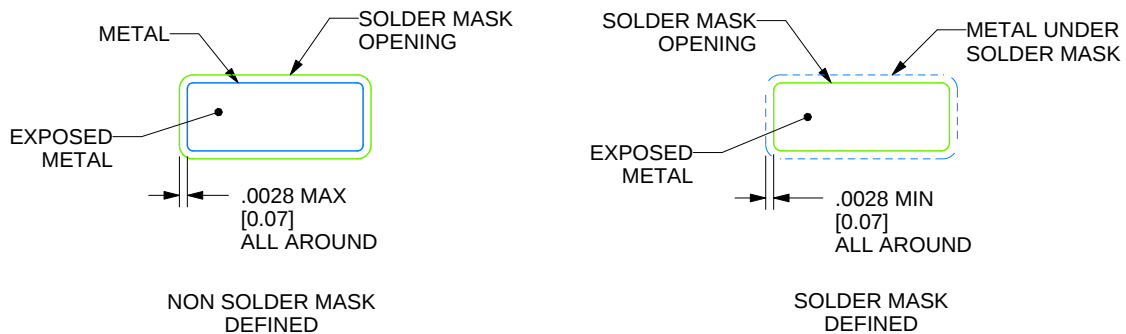

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

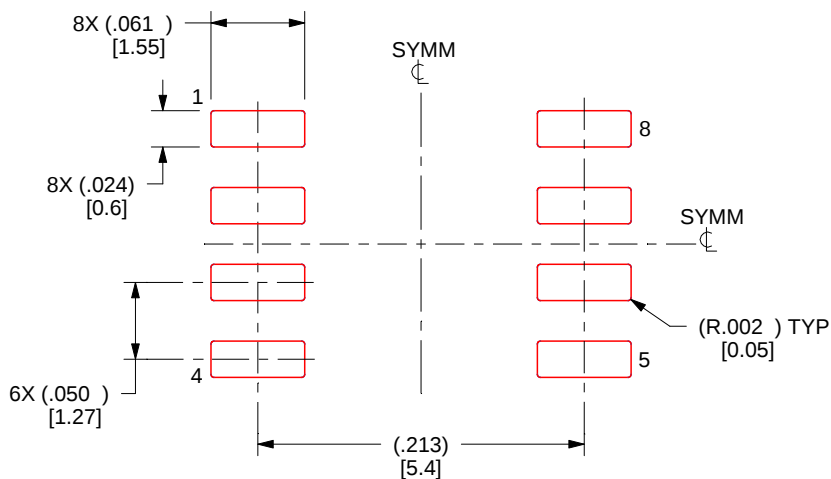

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

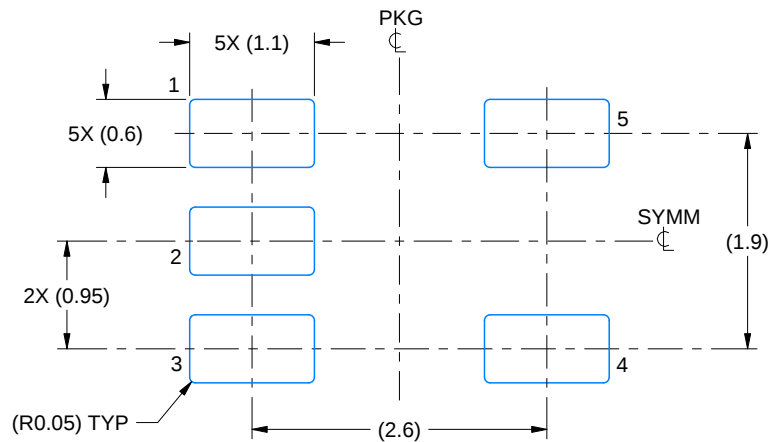

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

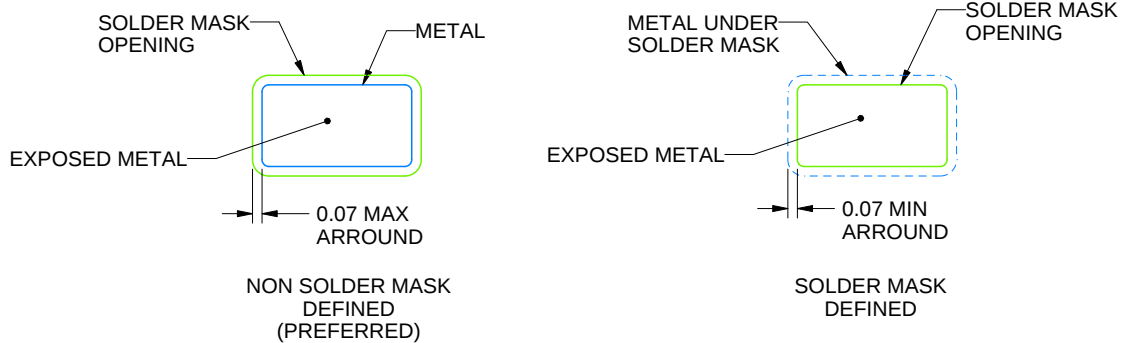

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

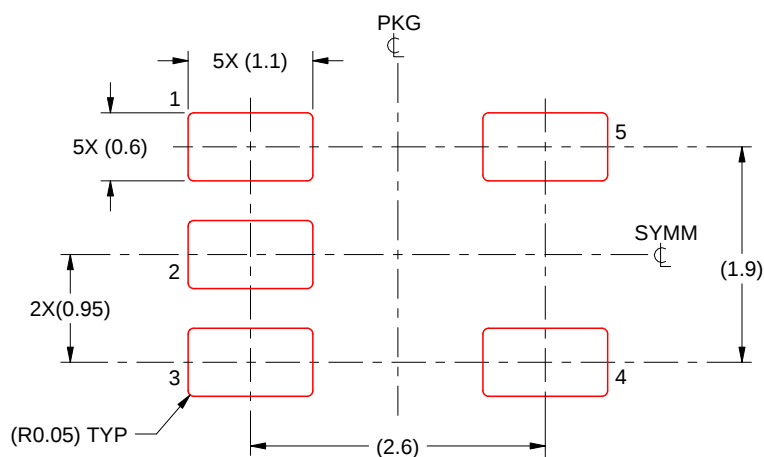

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



VSSOP - 1.1 mm max height

Technical drawing of a connector housing, showing front, side, and detail views.

Front View:

- Overall width: 5.05 TYP (nominal), 4.75 (minimum).
- Overall height: 3.1 (nominal), 2.9 (minimum).
- Feature 1: Pin 1 Index Area (circular pattern).
- Feature 2: 8 pins, 6X 0.65 (pitch).
- Feature 3: 2X 1.95 (pitch).
- Feature 4: 5 pins, 8X 0.38 (pitch), 0.25 (pitch).
- Feature 5: 0.13 (pitch).
- Feature 6: 0.13 (pitch).
- Feature 7: 0.13 (pitch).
- Feature 8: 0.13 (pitch).
- Feature 9: 0.13 (pitch).
- Feature 10: 0.13 (pitch).
- Feature 11: 0.13 (pitch).
- Feature 12: 0.13 (pitch).
- Feature 13: 0.13 (pitch).
- Feature 14: 0.13 (pitch).
- Feature 15: 0.13 (pitch).
- Feature 16: 0.13 (pitch).
- Feature 17: 0.13 (pitch).
- Feature 18: 0.13 (pitch).
- Feature 19: 0.13 (pitch).
- Feature 20: 0.13 (pitch).
- Feature 21: 0.13 (pitch).
- Feature 22: 0.13 (pitch).
- Feature 23: 0.13 (pitch).
- Feature 24: 0.13 (pitch).
- Feature 25: 0.13 (pitch).
- Feature 26: 0.13 (pitch).
- Feature 27: 0.13 (pitch).
- Feature 28: 0.13 (pitch).
- Feature 29: 0.13 (pitch).
- Feature 30: 0.13 (pitch).
- Feature 31: 0.13 (pitch).
- Feature 32: 0.13 (pitch).
- Feature 33: 0.13 (pitch).
- Feature 34: 0.13 (pitch).
- Feature 35: 0.13 (pitch).
- Feature 36: 0.13 (pitch).
- Feature 37: 0.13 (pitch).
- Feature 38: 0.13 (pitch).
- Feature 39: 0.13 (pitch).
- Feature 40: 0.13 (pitch).
- Feature 41: 0.13 (pitch).
- Feature 42: 0.13 (pitch).
- Feature 43: 0.13 (pitch).
- Feature 44: 0.13 (pitch).
- Feature 45: 0.13 (pitch).
- Feature 46: 0.13 (pitch).
- Feature 47: 0.13 (pitch).
- Feature 48: 0.13 (pitch).
- Feature 49: 0.13 (pitch).
- Feature 50: 0.13 (pitch).
- Feature 51: 0.13 (pitch).
- Feature 52: 0.13 (pitch).
- Feature 53: 0.13 (pitch).
- Feature 54: 0.13 (pitch).
- Feature 55: 0.13 (pitch).
- Feature 56: 0.13 (pitch).
- Feature 57: 0.13 (pitch).
- Feature 58: 0.13 (pitch).
- Feature 59: 0.13 (pitch).
- Feature 60: 0.13 (pitch).
- Feature 61: 0.13 (pitch).
- Feature 62: 0.13 (pitch).
- Feature 63: 0.13 (pitch).
- Feature 64: 0.13 (pitch).
- Feature 65: 0.13 (pitch).
- Feature 66: 0.13 (pitch).
- Feature 67: 0.13 (pitch).
- Feature 68: 0.13 (pitch).
- Feature 69: 0.13 (pitch).
- Feature 70: 0.13 (pitch).
- Feature 71: 0.13 (pitch).
- Feature 72: 0.13 (pitch).
- Feature 73: 0.13 (pitch).
- Feature 74: 0.13 (pitch).
- Feature 75: 0.13 (pitch).
- Feature 76: 0.13 (pitch).
- Feature 77: 0.13 (pitch).
- Feature 78: 0.13 (pitch).
- Feature 79: 0.13 (pitch).
- Feature 80: 0.13 (pitch).
- Feature 81: 0.13 (pitch).
- Feature 82: 0.13 (pitch).
- Feature 83: 0.13 (pitch).
- Feature 84: 0.13 (pitch).
- Feature 85: 0.13 (pitch).
- Feature 86: 0.13 (pitch).
- Feature 87: 0.13 (pitch).
- Feature 88: 0.13 (pitch).
- Feature 89: 0.13 (pitch).
- Feature 90: 0.13 (pitch).
- Feature 91: 0.13 (pitch).
- Feature 92: 0.13 (pitch).
- Feature 93: 0.13 (pitch).
- Feature 94: 0.13 (pitch).
- Feature 95: 0.13 (pitch).
- Feature 96: 0.13 (pitch).
- Feature 97: 0.13 (pitch).
- Feature 98: 0.13 (pitch).
- Feature 99: 0.13 (pitch).
- Feature 100: 0.13 (pitch).

Side View:

- Overall height: 3.1 (nominal), 2.9 (minimum).
- Feature 1: Seating Plane.
- Feature 2: 0.1 (pitch).
- Feature 3: 0.1 (pitch).
- Feature 4: 0.1 (pitch).
- Feature 5: 0.1 (pitch).
- Feature 6: 0.1 (pitch).
- Feature 7: 0.1 (pitch).
- Feature 8: 0.1 (pitch).
- Feature 9: 0.1 (pitch).
- Feature 10: 0.1 (pitch).
- Feature 11: 0.1 (pitch).
- Feature 12: 0.1 (pitch).
- Feature 13: 0.1 (pitch).
- Feature 14: 0.1 (pitch).
- Feature 15: 0.1 (pitch).
- Feature 16: 0.1 (pitch).
- Feature 17: 0.1 (pitch).
- Feature 18: 0.1 (pitch).
- Feature 19: 0.1 (pitch).
- Feature 20: 0.1 (pitch).
- Feature 21: 0.1 (pitch).
- Feature 22: 0.1 (pitch).
- Feature 23: 0.1 (pitch).
- Feature 24: 0.1 (pitch).
- Feature 25: 0.1 (pitch).
- Feature 26: 0.1 (pitch).
- Feature 27: 0.1 (pitch).
- Feature 28: 0.1 (pitch).
- Feature 29: 0.1 (pitch).
- Feature 30: 0.1 (pitch).
- Feature 31: 0.1 (pitch).
- Feature 32: 0.1 (pitch).
- Feature 33: 0.1 (pitch).
- Feature 34: 0.1 (pitch).
- Feature 35: 0.1 (pitch).
- Feature 36: 0.1 (pitch).
- Feature 37: 0.1 (pitch).
- Feature 38: 0.1 (pitch).
- Feature 39: 0.1 (pitch).
- Feature 40: 0.1 (pitch).
- Feature 41: 0.1 (pitch).
- Feature 42: 0.1 (pitch).
- Feature 43: 0.1 (pitch).
- Feature 44: 0.1 (pitch).
- Feature 45: 0.1 (pitch).
- Feature 46: 0.1 (pitch).
- Feature 47: 0.1 (pitch).
- Feature 48: 0.1 (pitch).
- Feature 49: 0.1 (pitch).
- Feature 50: 0.1 (pitch).
- Feature 51: 0.1 (pitch).
- Feature 52: 0.1 (pitch).
- Feature 53: 0.1 (pitch).
- Feature 54: 0.1 (pitch).
- Feature 55: 0.1 (pitch).
- Feature 56: 0.1 (pitch).
- Feature 57: 0.1 (pitch).
- Feature 58: 0.1 (pitch).
- Feature 59: 0.1 (pitch).
- Feature 60: 0.1 (pitch).
- Feature 61: 0.1 (pitch).
- Feature 62: 0.1 (pitch).
- Feature 63: 0.1 (pitch).
- Feature 64: 0.1 (pitch).
- Feature 65: 0.1 (pitch).
- Feature 66: 0.1 (pitch).
- Feature 67: 0.1 (pitch).
- Feature 68: 0.1 (pitch).
- Feature 69: 0.1 (pitch).
- Feature 70: 0.1 (pitch).
- Feature 71: 0.1 (pitch).
- Feature 72: 0.1 (pitch).
- Feature 73: 0.1 (pitch).
- Feature 74: 0.1 (pitch).
- Feature 75: 0.1 (pitch).
- Feature 76: 0.1 (pitch).
- Feature 77: 0.1 (pitch).
- Feature 78: 0.1 (pitch).
- Feature 79: 0.1 (pitch).
- Feature 80: 0.1 (pitch).
- Feature 81: 0.1 (pitch).
- Feature 82: 0.1 (pitch).
- Feature 83: 0.1 (pitch).
- Feature 84: 0.1 (pitch).
- Feature 85: 0.1 (pitch).
- Feature 86: 0.1 (pitch).
- Feature 87: 0.1 (pitch).
- Feature 88: 0.1 (pitch).
- Feature 89: 0.1 (pitch).
- Feature 90: 0.1 (pitch).
- Feature 91: 0.1 (pitch).
- Feature 92: 0.1 (pitch).
- Feature 93: 0.1 (pitch).
- Feature 94: 0.1 (pitch).
- Feature 95: 0.1 (pitch).
- Feature 96: 0.1 (pitch).
- Feature 97: 0.1 (pitch).
- Feature 98: 0.1 (pitch).
- Feature 99: 0.1 (pitch).
- Feature 100: 0.1 (pitch).

Detail A:

- Overall width: 0.23 (nominal), 0.13 (minimum).
- Feature 1: 0.25 (pitch).
- Feature 2: 0.25 (pitch).
- Feature 3: 0.25 (pitch).
- Feature 4: 0.25 (pitch).
- Feature 5: 0.25 (pitch).
- Feature 6: 0.25 (pitch).
- Feature 7: 0.25 (pitch).
- Feature 8: 0.25 (pitch).
- Feature 9: 0.25 (pitch).
- Feature 10: 0.25 (pitch).
- Feature 11: 0.25 (pitch).
- Feature 12: 0.25 (pitch).
- Feature 13: 0.25 (pitch).
- Feature 14: 0.25 (pitch).
- Feature 15: 0.25 (pitch).
- Feature 16: 0.25 (pitch).
- Feature 17: 0.25 (pitch).
- Feature 18: 0.25 (pitch).
- Feature 19: 0.25 (pitch).
- Feature 20: 0.25 (pitch).
- Feature 21: 0.25 (pitch).
- Feature 22: 0.25 (pitch).
- Feature 23: 0




EXAMPLE BOARD LAYOUT



DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

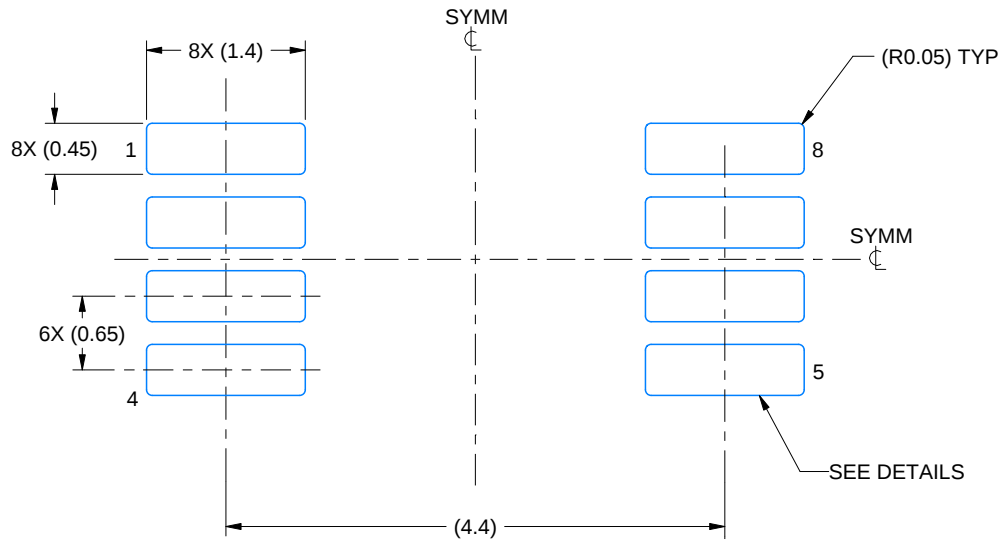

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

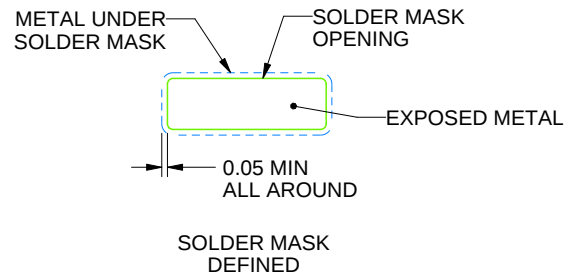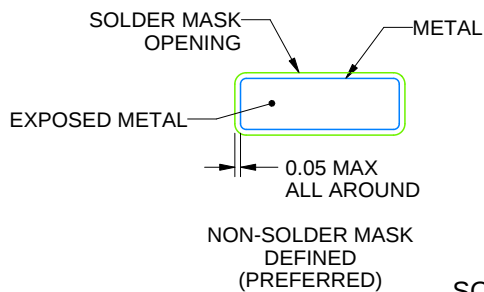

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

DGK0008A

TM VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

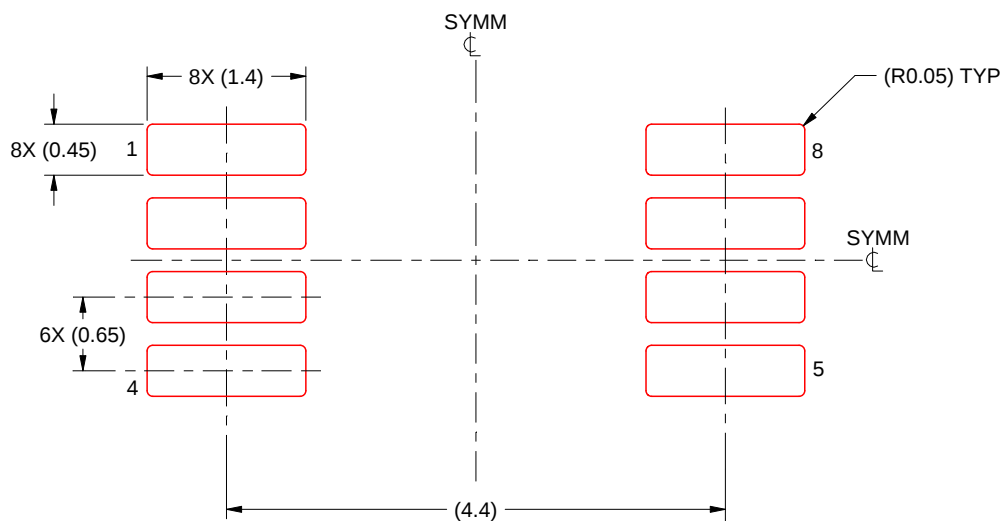

SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025