


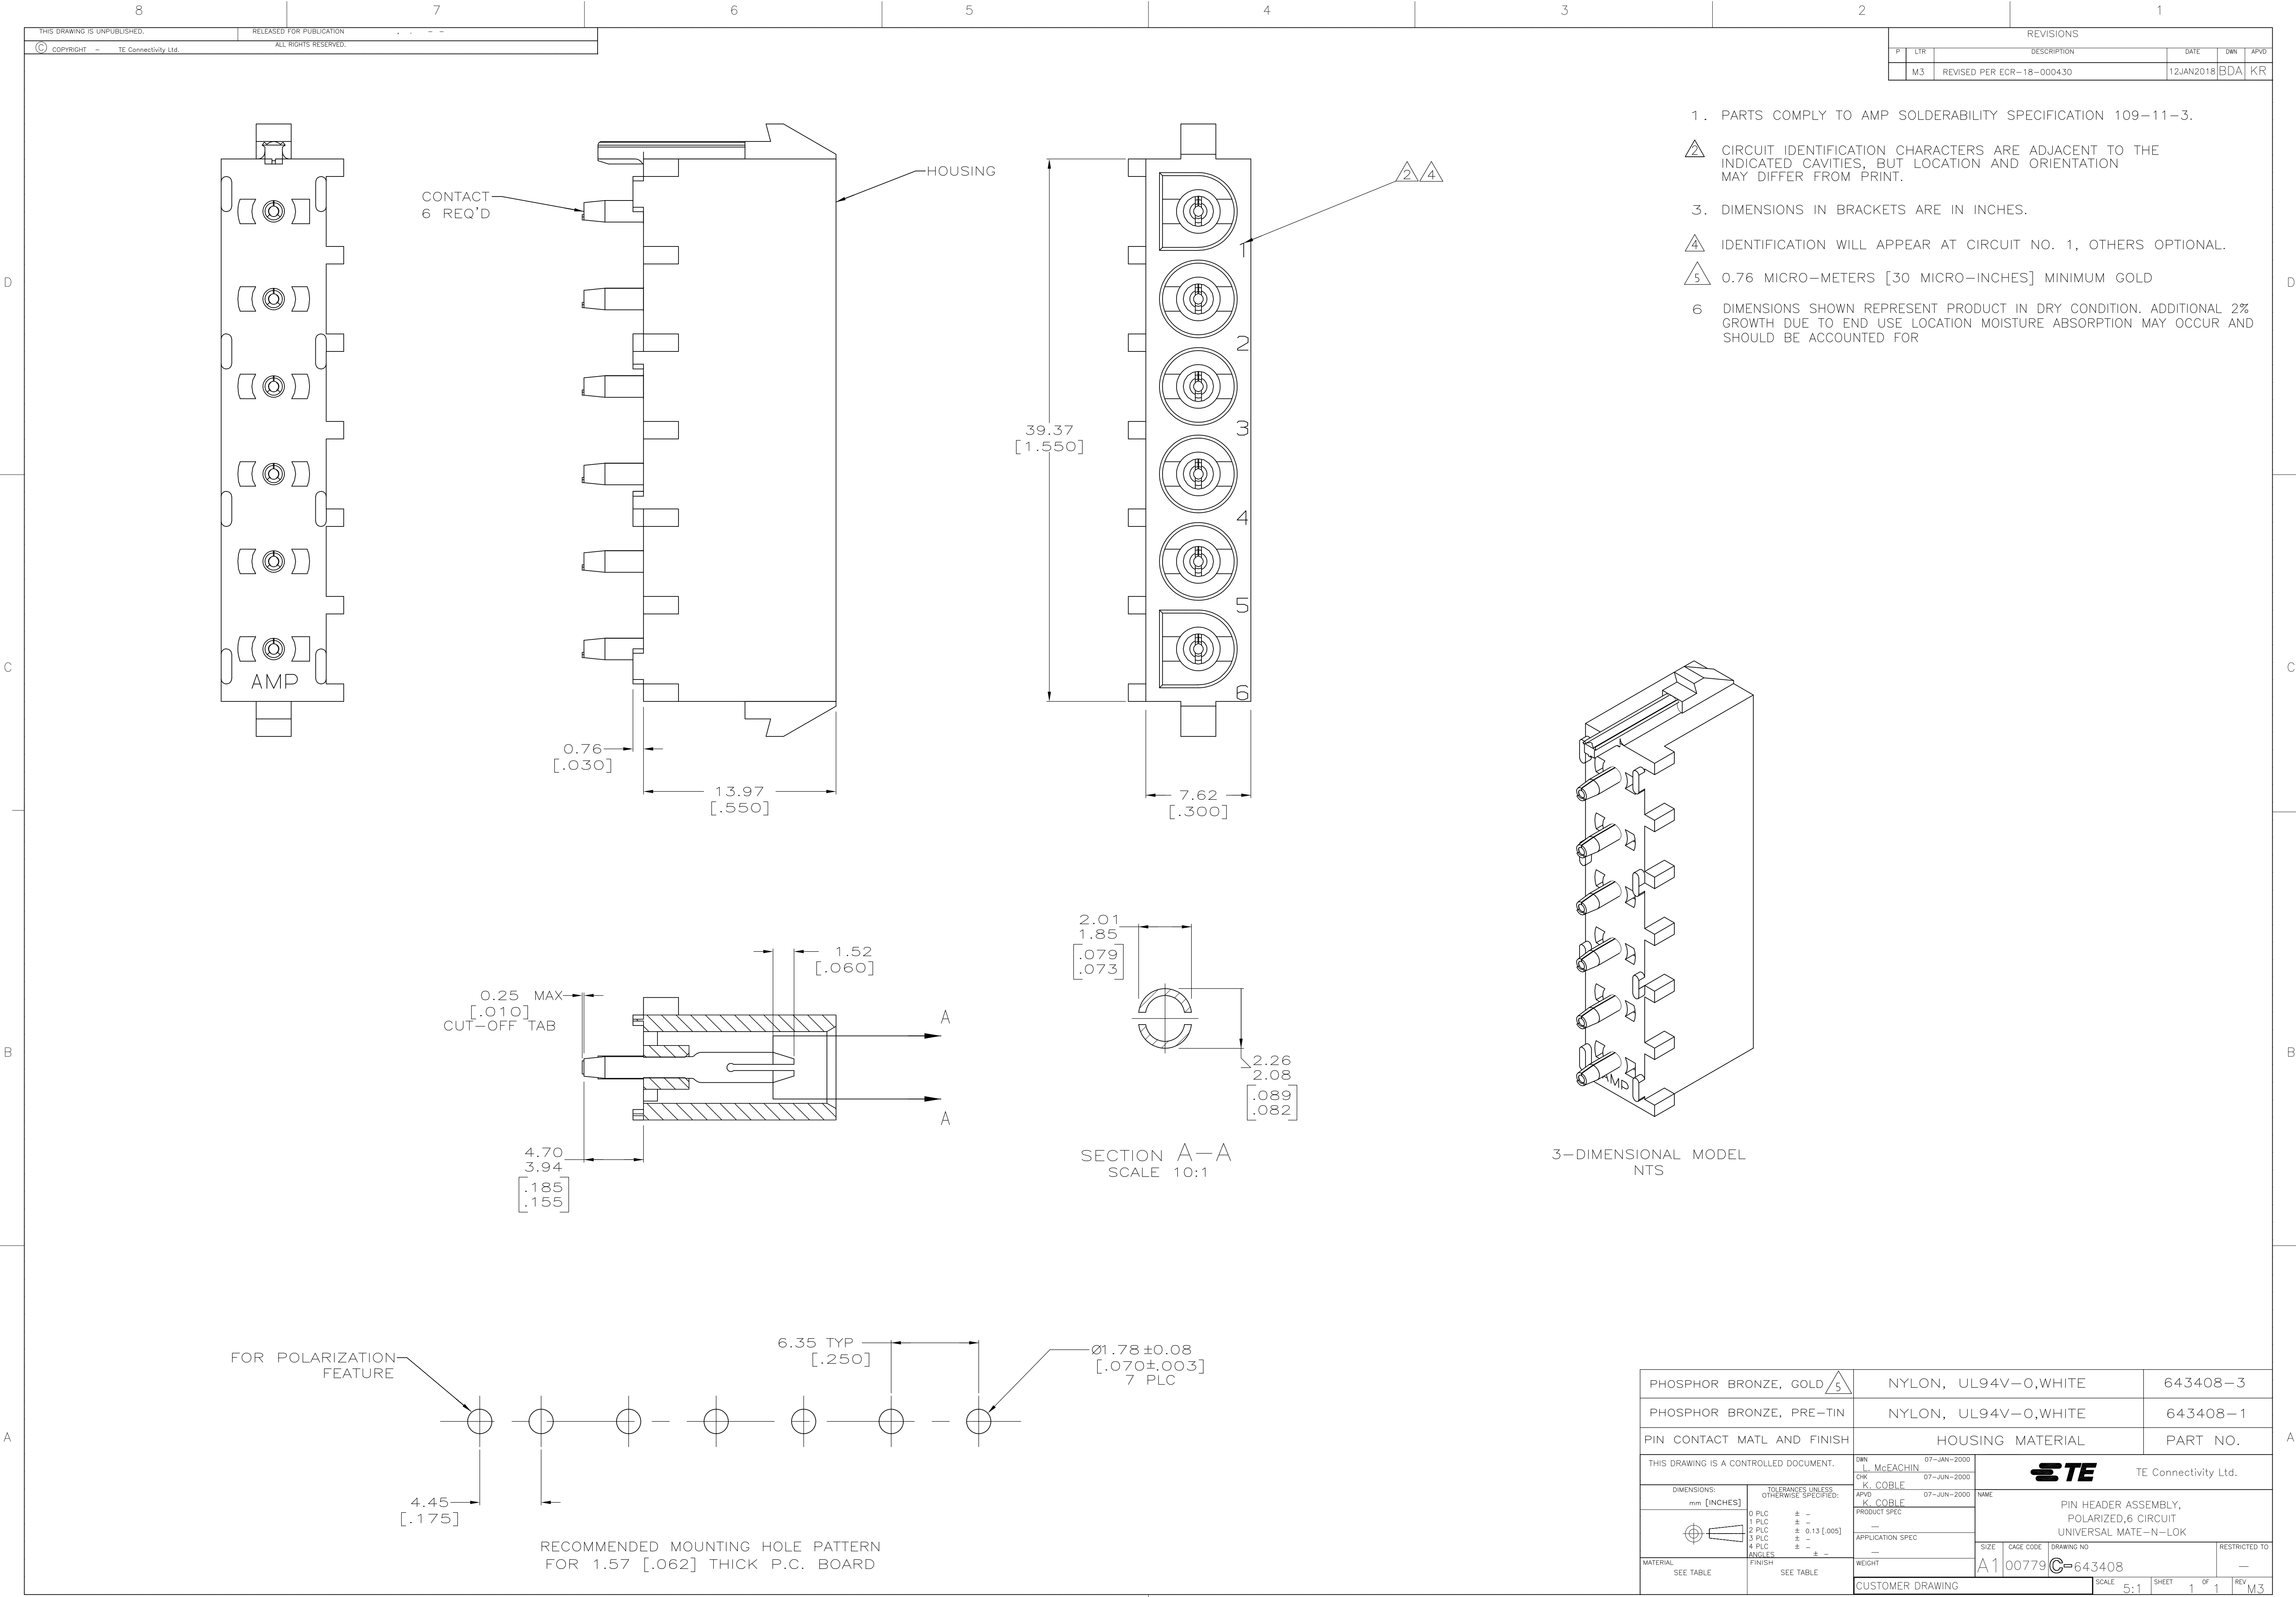

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
M3		REVISED PER ECR-18-000430	12JAN2018	BDA	KR

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
- IDENTIFICATION WILL APPEAR AT CIRCUIT NO. 1, OTHERS OPTIONAL.
- 0.76 MICRO-METERS [30 MICRO-INCHES] MINIMUM GOLD
- 6 DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR

PHOSPHOR BRONZE, GOLD 5	NYLON, UL94V-0,WHITE	643408-3
PHOSPHOR BRONZE, PRE-TIN	NYLON, UL94V-0,WHITE	643408-1
PIN CONTACT MATL AND FINISH	HOUSING MATERIAL	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN L. McEACHIN 07-JAN-2000 CHK K. COBLE 07-JUN-2000	TE Connectivity Ltd.
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -	
	APPLICATION SPEC	
MATERIAL SEE TABLE	FINISH SEE TABLE	
WEIGHT	SIZE A1 CAGE CODE 00779 DRAWING NO. 643408	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV M3