



LOC	DISC	REVIEWS			
		P	U/R	DATE	OWN
GP	00	L		REV PER EC 0512-0217-03	12MAY03 AWF AWF

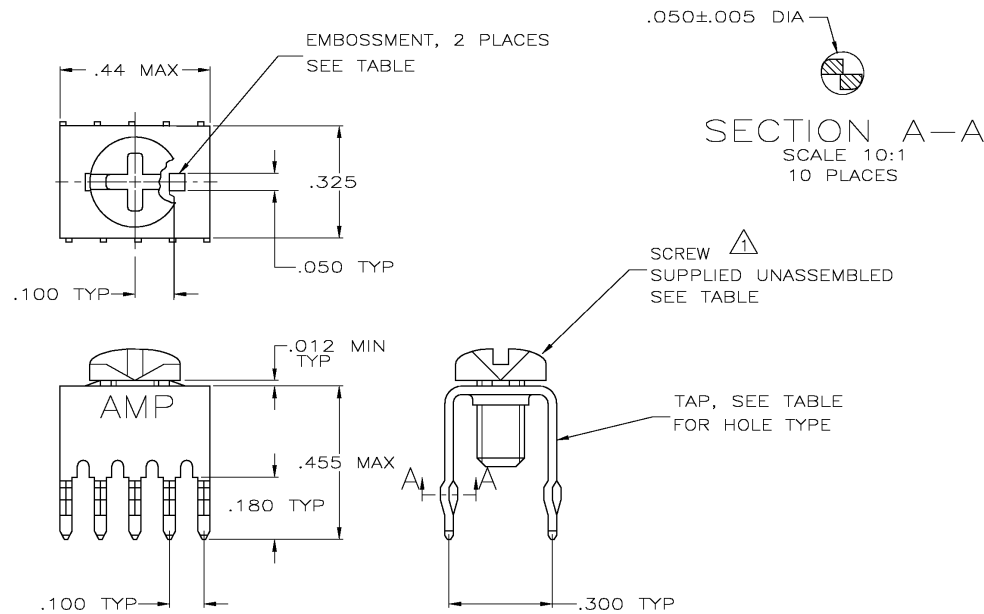

- 1 TO PREVENT THREAD STRIPPING, SCREW TORQUE SHOULD NOT EXCEED 9 IN LBS.
- 2 TAP HOLE IS 6-32UNC-2B, TWO MIN THREADS.
- 3 TAP HOLE IS M4 X 0.7, TWO MIN THREADS.
- 4 TAP: .000150 TIN-LEAD OVER .000050 NICKEL.
- 5 TAP: .000150 TIN OVER .000050 NICKEL.

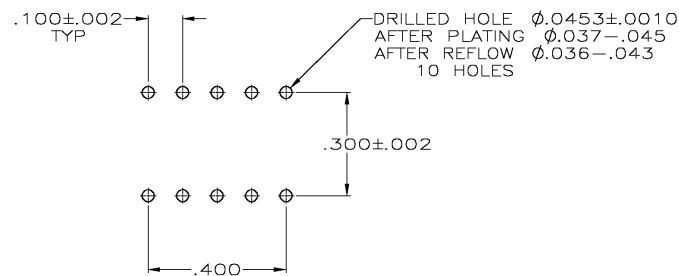

SUPERSEDED BY -4	5	2	993879-1	YES	9-55558-1
		2	NO	YES	9-55558-0
	4	3	NO	YES	1-55558-1
		2	993879-1	NO	55558-8
		2	NO	NO	55558-7
	4	2	993879-1	YES	55558-4
		2	NO	YES	55558-3
	FINISH	HOLE TYPE	SCREW	EMBOSMENT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. McCLINTON 1-11-88	Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK R. STONE 1-11-88	City, State, Zip	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APD M. GALLOWAY 1-11-88	NAME	
0 PLC ± -		PRODUCT SPEC	TAP, POWER DISTRIBUTION	
1 PLC ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
2 PLC ± -		WEIGHT	A2 00779 C-55558	
3 PLC ± .008		RESTRICTED TO	CUSTOMER DRAWING	
4 PLC ± -		SCALE 4:1	SHEET 1 OF 1	
ANGLES ± -		REV L		
MATERIAL COPPER ALLOY 725.				