

MiniCore™ RCM5700 Series

Ultra-Compact Wi-Fi Module

A low-cost, ultra-compact, pin-compatible Ethernet control and communications solution for your embedded design.




Overview

The MiniCore RCM5700 series offers an integrated software and hardware platform that can shorten your design cycle from years to months. RCM5750 and RCM5760 allow datalogging capabilities with increased memory options.

With six serial ports, four configurable as SPI, the RCM5700 series can easily embed into any existing or new design and is pin-compatible with current and future MiniCore products, such as MiniCores offering Wi-Fi 802.11b/g. The embedded web server offers an added level of control and monitoring for today's intensive applications.

Application Highlight

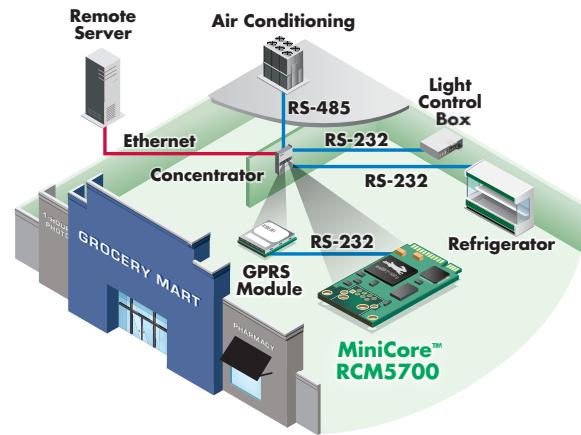

Ideal Applications : Remote energy management, Security and surveillance, Building automation, Gaming (player tracking), Test and measurement equipment

Features/Benefits

- 10/100Base-T Ethernet
- Up to 640 KB SRAM for data, 1 MB Flash memory for program storage, 2 MB serial Flash for mass storage
- Up to 32 GPIO lines and 6 serial ports
- Serial to Ethernet bridge
- Embedded web server, Remote Firmware Update, open source code and royalty-free
- Cost-competitive embedded solution
- Quick time-to-market

Development Kit

This affordable development kit includes everything you need to get started.

\$99



Software

The Dynamic C® integrated development environment reduces the time and effort to write real-time software for embedded systems that use a Rabbit microprocessor, enabling easy development of a wide range of applications.

Rabbit products and Dynamic C integrate editing, compiling, linking, loading and debugging into a single development environment as one function. There are no compatibility issues when moving from one stage to another. Once the design is complete, you can debug it on the target hardware and see how your code works. Because it is a dialect of C, the Dynamic C language has all the statements and constructions of traditional C, plus extensions that make it easier to write reliable, real-time multi-tasking software. The Dynamic C integrated development environment allows for easy hardware migration, moving from a single-board computer to chip level production.

Dynamic C also includes highly useful software components that can add functionality and value to your applications. This functionality includes web server capability, filing system, remote firmware updates, and wired and wireless security. Compatible software components are listed below.


Software Components

	Component	Description
 RabbitWeb	RabbitWeb	System of HTML tags used to easily create web interfaces to monitor and control embedded applications
 RPU	Remote Program Update (RPU)	Allows for remote firmware updates from anywhere in the world using an Internet connection
 FAT	File Allocation Table (FAT)	Popular network-accessible file system for flashed based memories
 SSL	Secure Sockets Layer (SSL) / Transport Layer Security (TLS)	The industry standard for web security in embedded applications
 AES	Advanced Encryption Standard (AES)	128-bit encryption for transferring sensitive data

MiniCore™ RCM5700 Development Kits

Standard Development Kit	Deluxe Development Kit
The Standard and Deluxe Development Kits provide the essential tools needed to design your own microprocessor-based system.	
<p>The Standard Kit includes:</p> <ul style="list-style-type: none"> • RCM5700 module • Interface board with standoffs/connectors • Prototyping board with standoffs/connectors • USB cable to program RCM5700 via interface board • Dynamic C CD-ROM, including product documentation on disk • Getting Started instructions • Registration card 	<p>The Deluxe Development Kit includes everything in the Standard Development Kit, plus the following items:</p> <ul style="list-style-type: none"> • Universal AC adapter, 5VDC, 2 A (includes Canada/Japan/U.S., Australia/N.Z., U.K., and European style plugs) Development Kits sold in North America may contain an AC adapter with only a North American style plug • Digital I/O and serial communication accessory boards for use with certain sample programs • CAT 5/6 Ethernet cable and DB-9 to 10-pin header serial cable • Rabbit 5000 Processor Easy Reference poster
	

Specifications		RCM5700	RCM5710	RCM5750	RCM5760			
Features								
Microprocessor	Rabbit® 5000 at 50 MHz							
EMI Reduction	10/100Base-T (Ethernet Signals Only)	10/100Base-T w/RJ-45 connector	10/100Base-T (Ethernet Signals Only)	10/100Base-T w/RJ-45 connector				
Flash Memory (code)		1 MB parallel Flash						
SRAM (data)	128K internal to Rabbit 5000		128K internal to Rabbit 5000; 512K external Fast SRAM					
Battery Backable SRAM (data)		None						
Mass Storage Option	None		2 MB serial Flash					
Backup Battery	Connection for user-supplied backup battery (to be used for RTC)		None					
General Purpose I/O	Up to 32 parallel digital I/O							
Serial Ports	6 high-speed, CMOS-compatible ports: • All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC • 1 asynchronous clocked serial port shared with programming port							
Serial Rate	Max. async = CLK/8, Max. sync = CLK/2							
Slave Interface	Slave port allows the RCM5700 to be used as an intelligent peripheral device slaved to a master processor							
Real-Time Clock	Yes		Yes (no battery backup)					
Timers	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers							
Watchdog/Supervisor	Yes							
Pulse-Width Modulators	4 channels synchronized PWM with 10-bit counter 4 channels variable-phase or synchronized PWM with 16-bit counter							
Power	3.15 - 3.45VDC 70 mA @ 3.3V (typical — without Ethernet) 200 mA @ 3.3V (typical — with Ethernet)							
Operating Temperature	-40° C to +85° C							
Humidity	5% to 95%, noncondensing							
Connectors	Edge connectors for 52-pin Mini PCI Express socket	Edge connectors for 52-pin Mini PCI Express socket RJ45 (Ethernet)	Edge connectors for 52-pin Mini PCI Express socket	Edge connectors for 52-pin Mini PCI Express socket , RJ45 (Ethernet)				
Board Size	1.20" x 2.00" x 0.12" (30 mm x 51 mm x 3mm)							
Pricing								
(Qty. 1/100)	\$35/\$29.50	\$45/\$39.50	\$45/\$39.50	\$55/\$49.50				
Part Number	20-101-1235	20-101-1300	20-101-1306	20-101-1307				
Standard Development Kit	\$99 101-1274							
Deluxe Development Kit	\$199 101-1275							
Part Number								

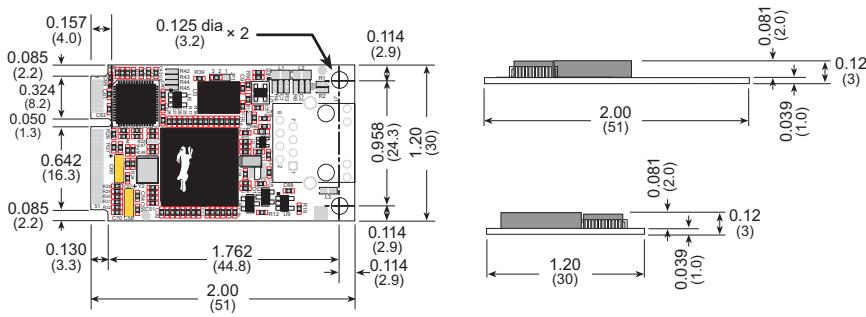

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong one-year warranty. www.digi.com/support

Digi International 877-912-3444 952-912-3444 info@digi.com	Digi International France +33-1-55-61-98-98 www.digi.fr	Digi International KK +81-3-5428-0261 www.digi-intl.co.jp	Digi International (HK) Limited +852-2833-1008 www.digi.cn
--	--	--	---

BUY ONLINE • www.digi.com

91001511
C1/1210

© 2009-2010 Pigi International Inc.

© 2009-2017 Digi International Inc. All rights reserved. Digi, Digi International, the Digi logo, the Wireless M2M logo, Rabbit, RabbitNet, Dynamic C and MiniCore are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rabbit Semiconductor:

[101-1274](#) [101-1275](#) [20-101-1235](#) [20-101-1300](#) [20-101-1306](#) [20-101-1307](#)