
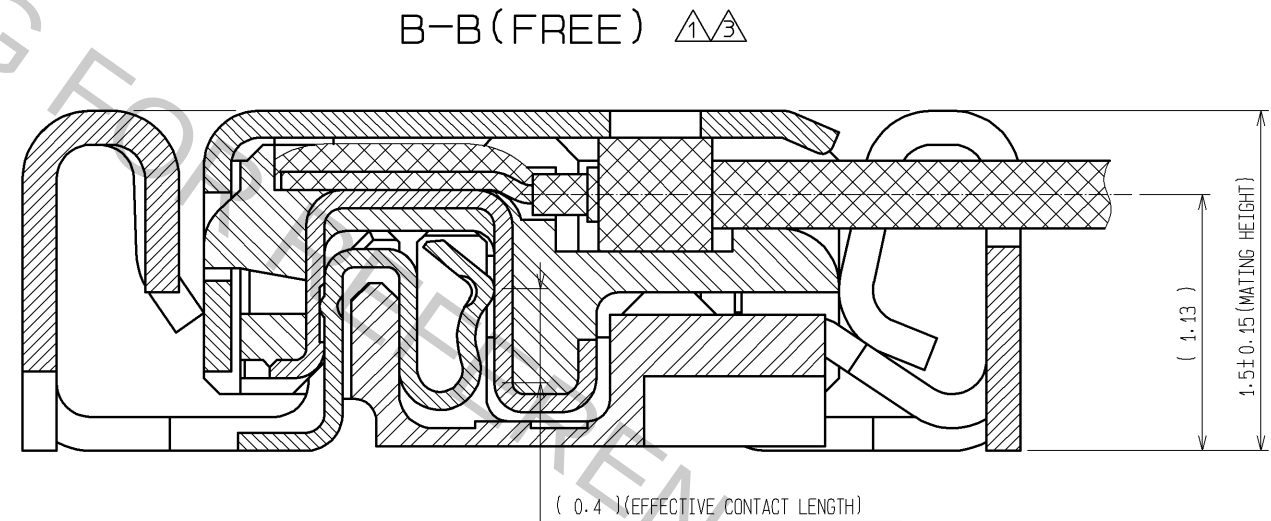
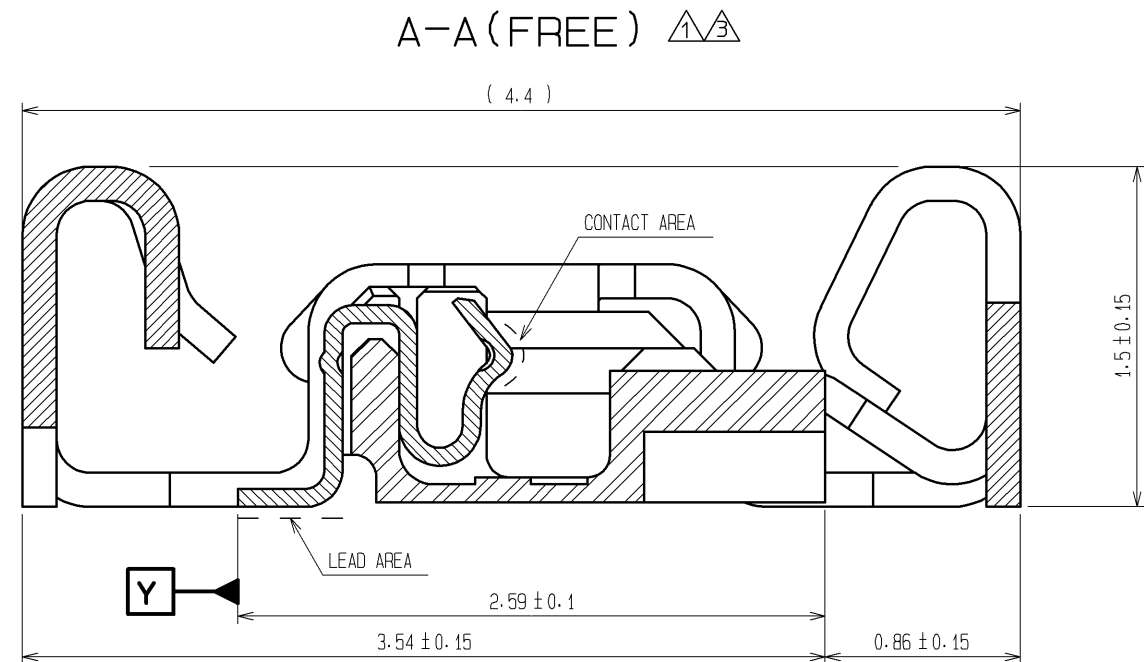
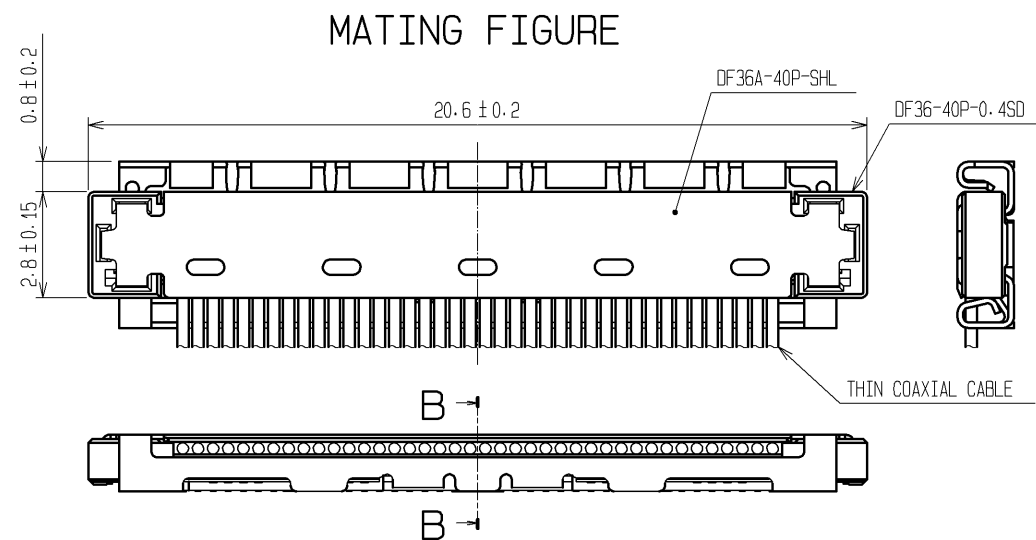
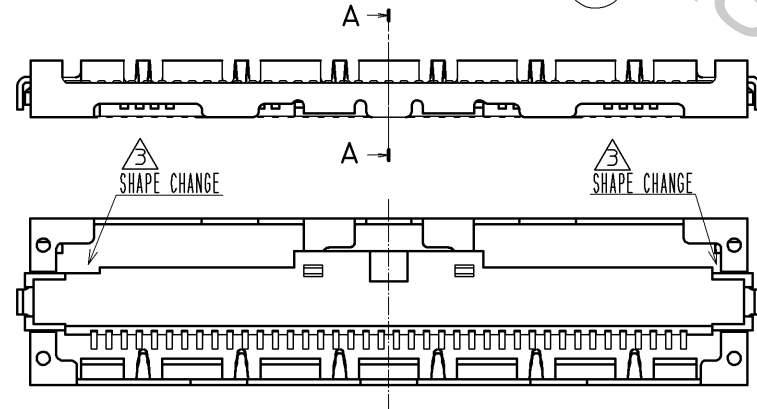


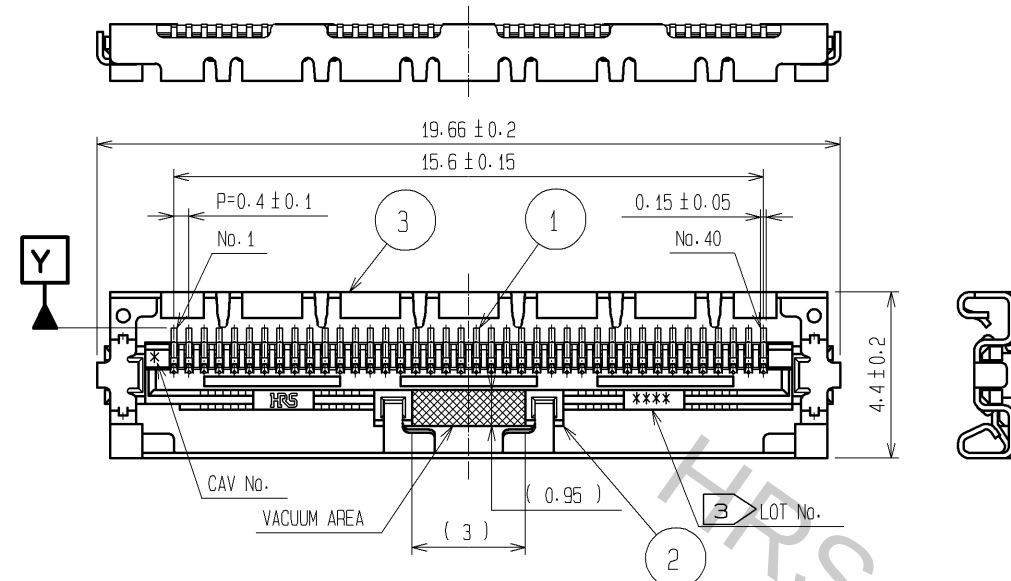


NOTES

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
3. LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE:8GFD
-YEAR:2008 MONTH:July DAY:15 LINE No.:4
4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
5. SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.

YEAR		MONTH		DAY						LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE	LINE No.	CODE
10	0	Jan	A	1	1	11	B	21	M	1	A
11	1	Feb	B	2	2	12	C	22	N	2	B
12	2	Mar	C	3	3	13	D	23	P	3	C
13	3	Apr	D	4	4	14	E	24	Q	4	D
14	4	May	E	5	5	15	F	25	R	5	E
15	5	Jun	F	6	6	16	G	26	S	6	F
16	6	Jul	G	7	7	17	H	27	T	7	G
17	7	Aug	H	8	8	18	J	28	U	8	H
08	8	Sep	I	9	9	19	K	29	V	9	I
09	9	Oct	J	10	A	20	L	30	W	10	J
		Nov	K					31	X		
		Dec	L								

2		LCP	UL94V-0	6	PS	BLACK
1		PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.3µm min LEAD AREA : Au PLATING 0.1µm min UNDER PLATING : Ni PLATING 2µm min	5	POLYESTER	CLEAR
NO.		MATERIAL	FINISH , REMARKS	4	PS	CLEAR
NO.		MATERIAL	FINISH , REMARKS	3	PHOSPHOR BRONZE	WHOLE AREA : Sn PLATING 1µm min UNDER PLATING : Cu PLATING 0.2µm min
UNITS mm		SCALE 5 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-H-003408		DESIGNED SI. ISHII
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED : TY. OMA 07. 01. 11		CHECKED MN. KENJO
				CHECED : TS. SAKATA 07. 01. 11		DATE 08. 10. 30
				DESIGNED : MN. KENJO 07. 01. 09		DRAWING NO. EDC3-310170-01
				DRAWN : MN. KENJO 07. 01. 09		PART NO. DF36A-40S-0.4V(51)
						CODE NO. CL662-4003-6-51
						1/2

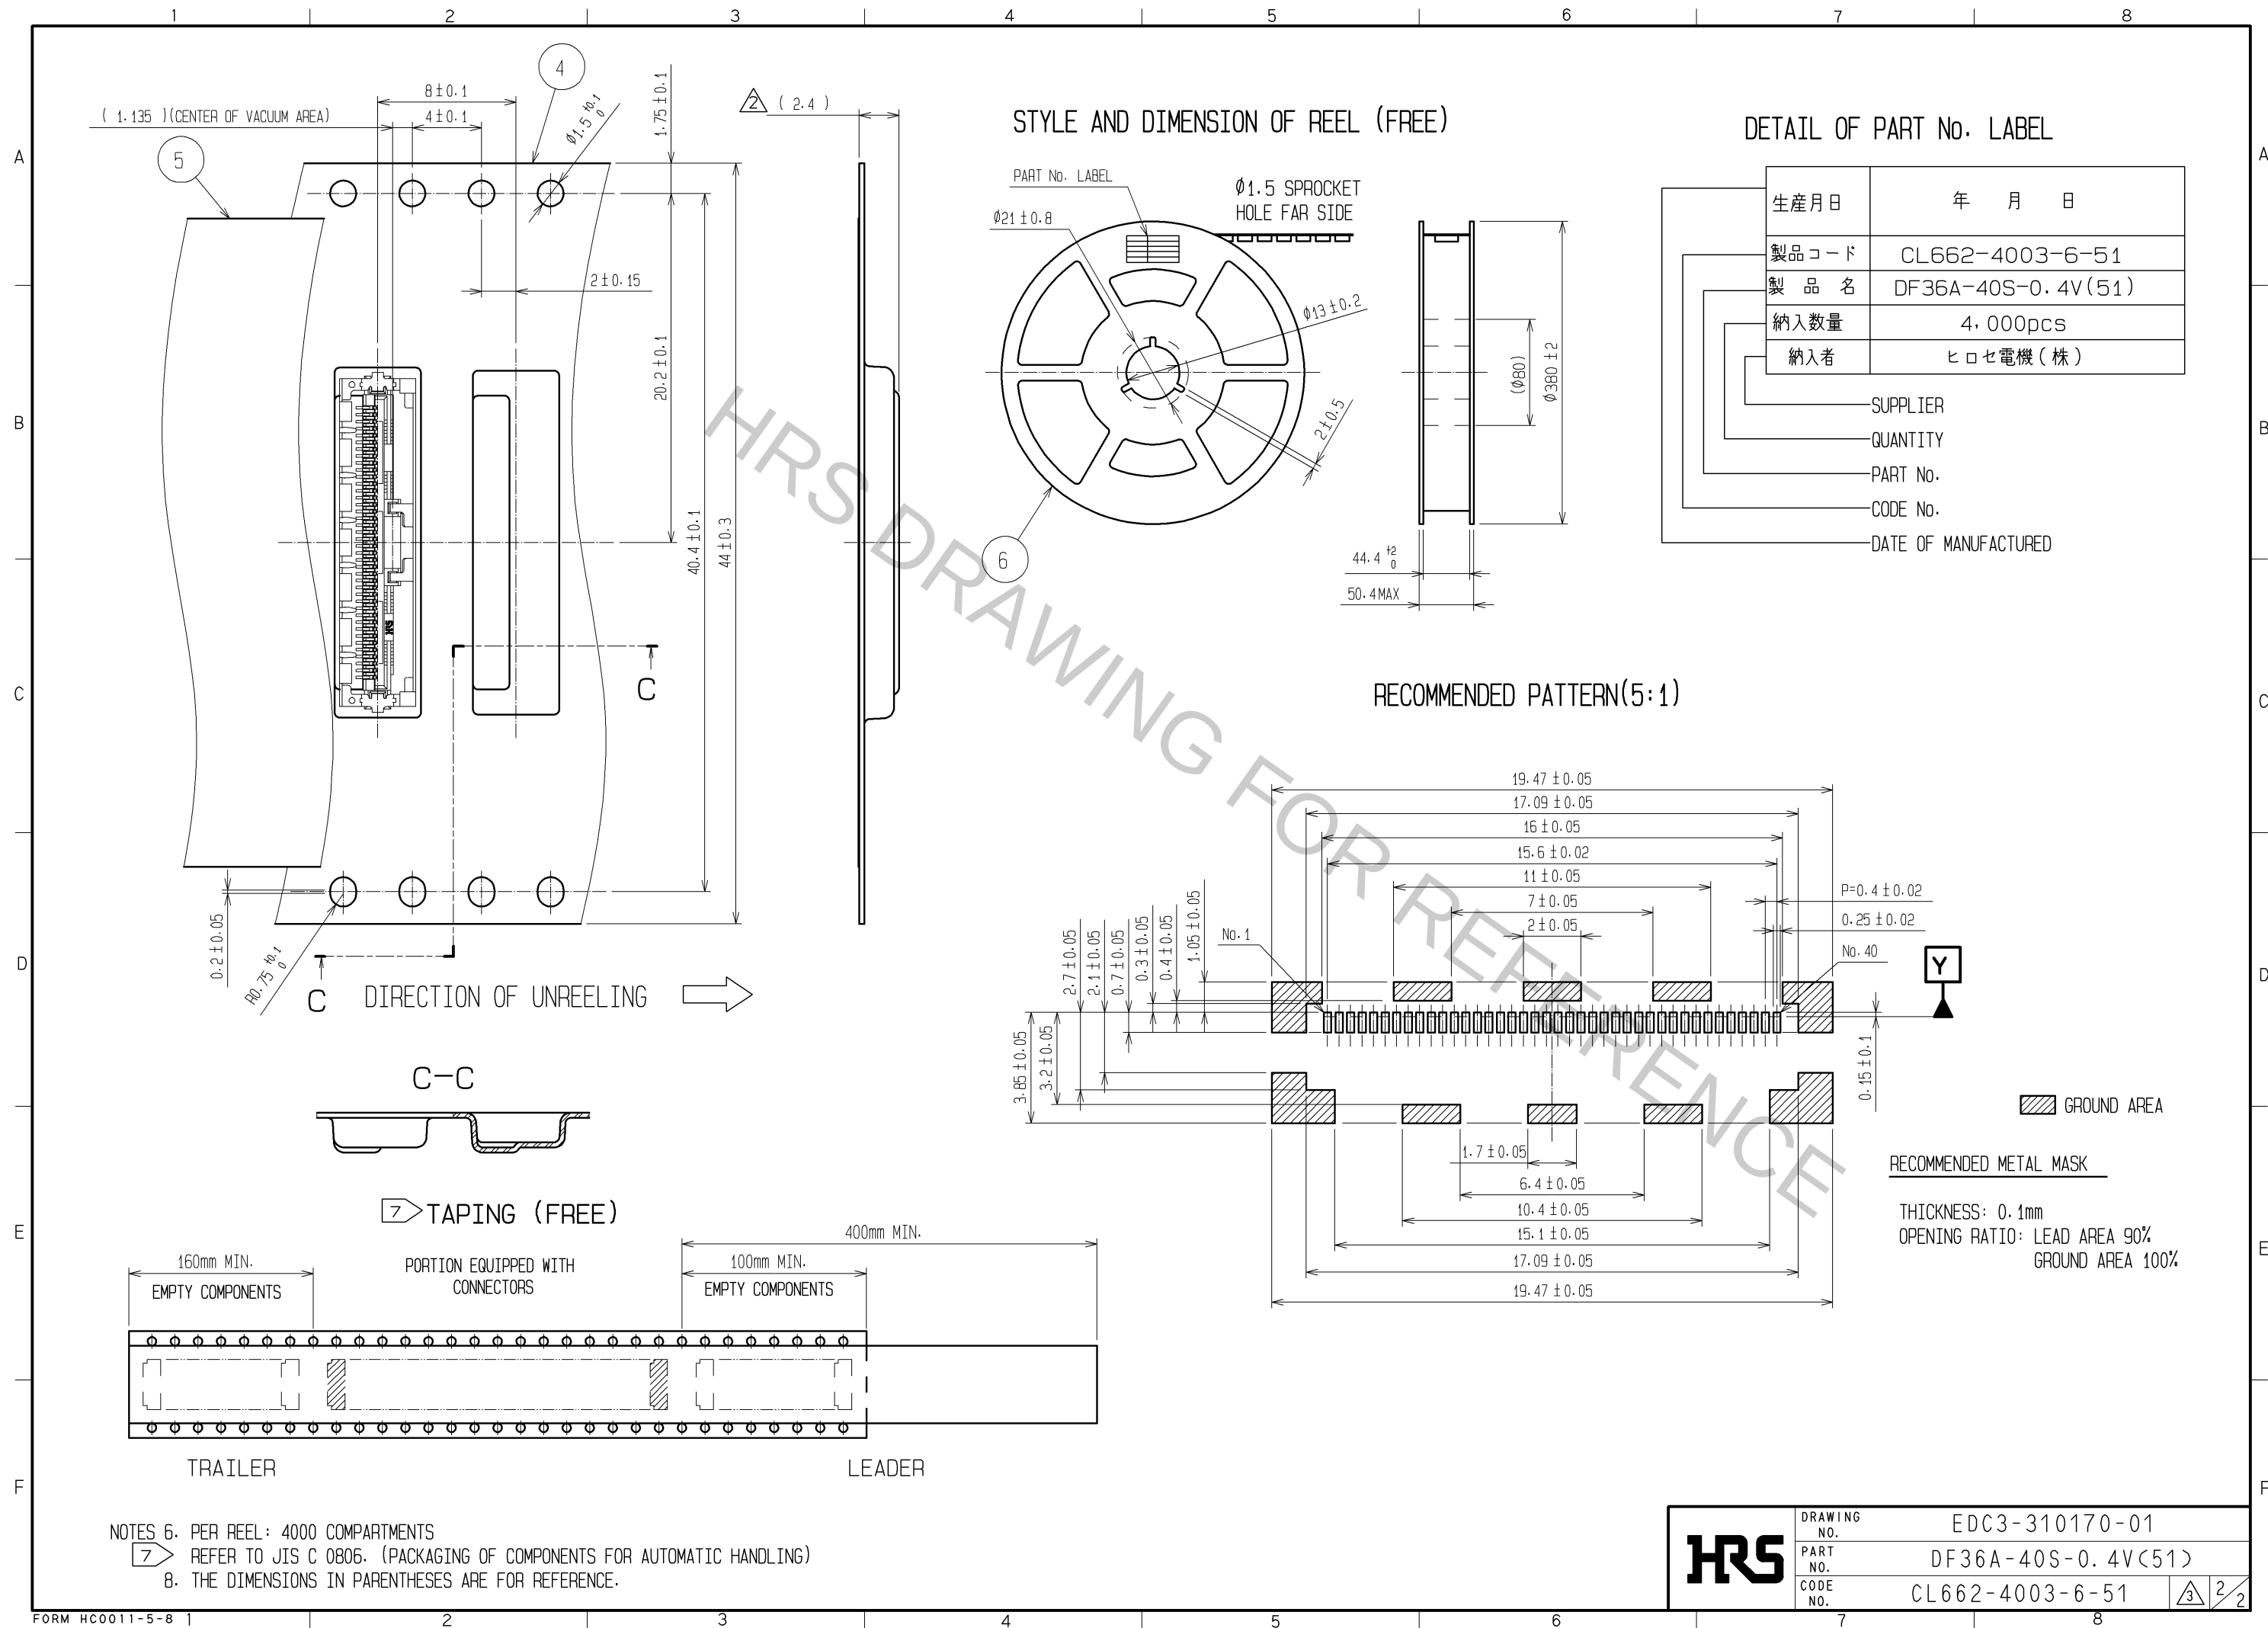



DRAWING NO.	EDC3-310170-01		
PART NO.	DF36A-40S-0.4V(51)		
CODE NO.	CL662-4003-6-51		