


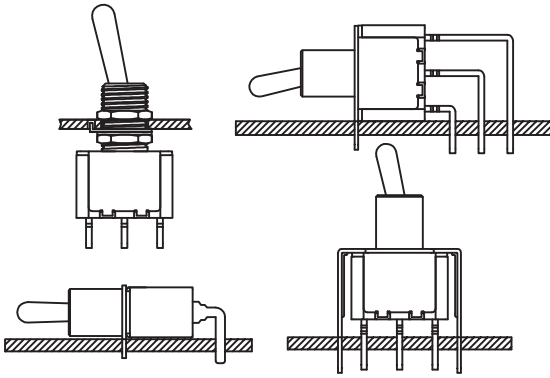

SPECIFICATIONS:


CONTACT RATING: Refer to "Contact Material Options" for more info.
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
 CONTACT RESISTANCE: 10mΩ max. initial @2-4VDC
 100mA for both silver and gold plated contacts.
 INSULATION RESISTANCE: 1,000MΩ min.
 DIELECTRIC STRENGTH: 1,500V RMS @ sea level.
 OPERATING TEMPERATURE: -30°C to +85°C

MATERIALS:

CASE: Diallyl phthalate(DAP)(UL 94V-0)
 TOGGLE HANDLE: Brass, chrome plated.
 BUSHING: Brass, nickel plated.
 HOUSING: Stainless Steel.
 TERMINAL SEAL: Epoxy.

If your preferred product configuration is not shown, please contact our sales representative for custom design.

HOW TO ORDER SYSTEM

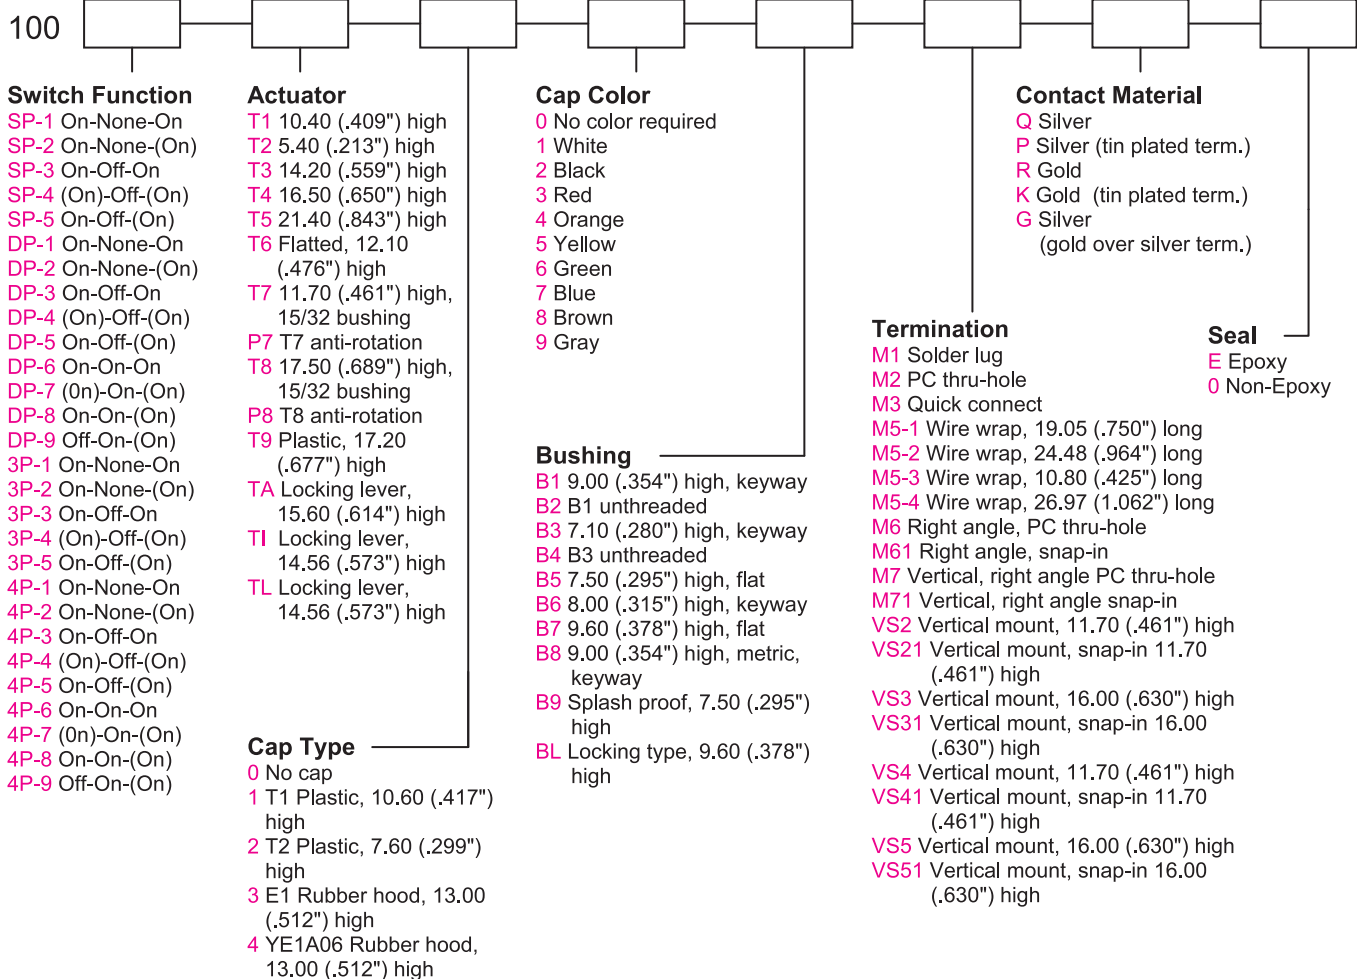**Note:**

No cap type required for
 T9 actuator


SPDT



Model No.	Switching Position		
SP-1	ON	NONE	ON
SP-2	ON	NONE	(ON)
SP-3	ON	OFF	ON
SP-4	(ON)	OFF	(ON)
SP-5	ON	OFF	(ON)
Term. Comm.	2-3	OPEN	2-1

Schematic

O2Comm.

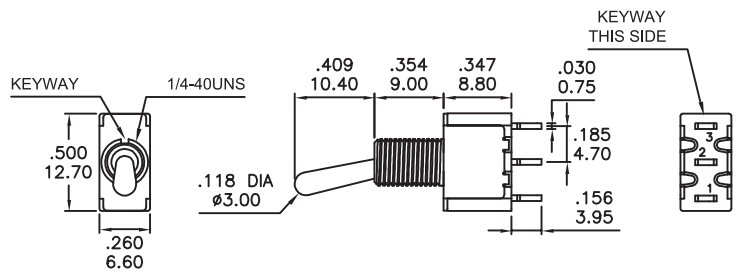

DPDT




Model No.	Switching Position		
DP-1	ON	NONE	ON
DP-2	ON	NONE	(ON)
DP-3	ON	OFF	ON
DP-4	(ON)	OFF	(ON)
DP-5	ON	OFF	(ON)
Term. Comm.	2-3,5-6	OPEN	2-1,5-4



Schematic

O2Comm.

O5Comm.

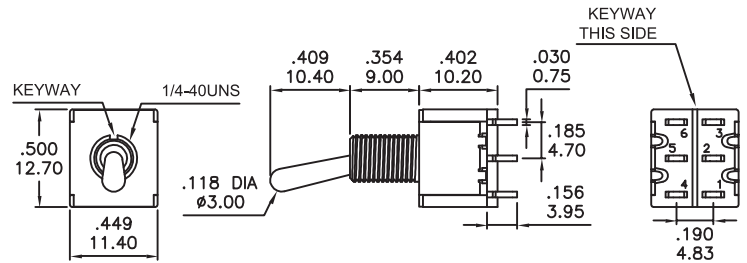

WIRING FOR ON-ON-ON (3-WAY) FUNCTION



3PDT





Model No.	Switching Position		
3P-1	ON	NONE	ON
3P-2	ON	NONE	(ON)
3P-3	ON	OFF	ON
3P-4	(ON)	OFF	(ON)
3P-5	ON	OFF	(ON)
Term. Comm.	2-3,5-6 8-9	OPEN	2-1,5-4 8-7

Schematic

O2Comm.

O5Comm.

O8Comm.

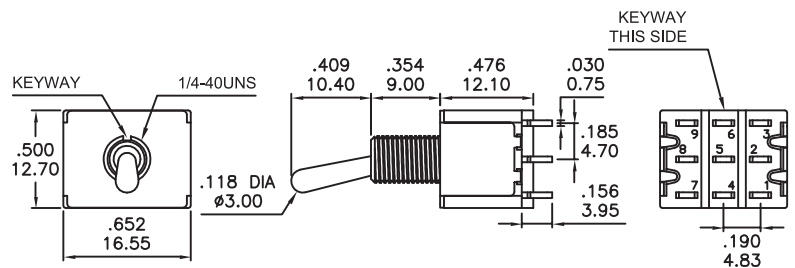


4PDT






Model No.	Switching Position		
4P-1	ON	NONE	ON
4P-2	ON	NONE	(ON)
4P-3	ON	OFF	ON
4P-4	(ON)	OFF	(ON)
4P-5	ON	OFF	(ON)
Term. Comm.	2-3,5-6 8-9 11-12	OPEN	2-1,5-4 8-7 11-10

Model No.	Switching Position		
4P-6	ON	ON	ON
4P-7	(ON)	ON	(ON)
4P-8	ON	ON	(ON)
4P-9	OFF	ON	(ON)
Term. Comm.	2-3,5-6 8-9 11-12	2-3,5-4 8-9 11-10	2-1,5-4 8-7 11-10










Schematic




WIRING FOR ON-ON-ON (3-WAY) FUNCTION

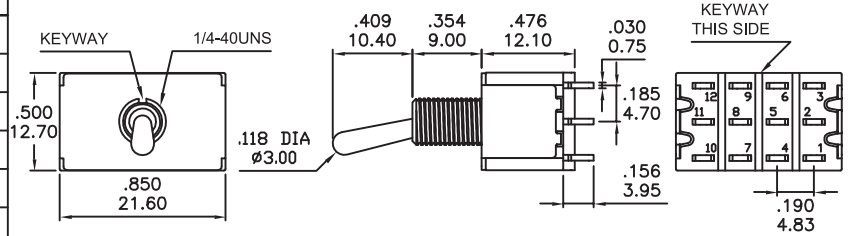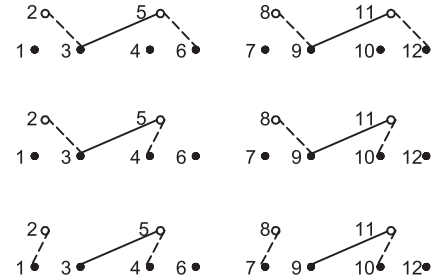

ACTUATOR OPTIONS





NO.	COLOR
1	White
2	Black(std.)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray



LOCKING LEVER

TA





FOR SP-1,DP-1
3P-1,4P-1 ONLY

FOR SP-3,DP-3
3P-3,4P-3 ONLY

LOCKING LEVER

TI





FOR SP-1,DP-1
3P-1,4P-1 ONLY

FOR SP-3,DP-3
3P-3,4P-3 ONLY

LOCKING LEVER

TL



FOR SP-1,DP-1
3P-1,4P-1 ONLY

FOR SP-3,DP-3
3P-3,4P-3 ONLY


* T6 must configure with a stand-off bushing.

* For T7,P7,T8,P8 bushing code is not required.


* Actuator length shown for T1 ~ T5 and T9 ~ T0 is with B1 bushing.

BUSHING OPTIONS


B1 THD
B2 NON-THD

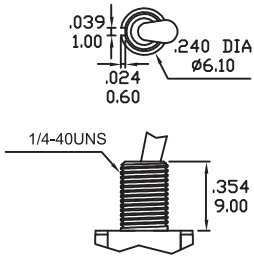


B3 THD
B4 NON-THD

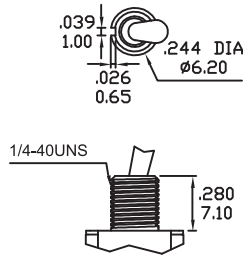


B5 HIGH TORQUE

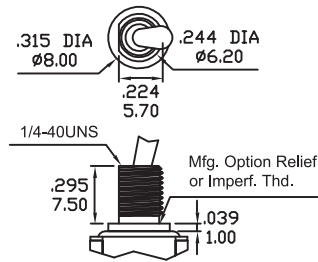


B6 HIGH TORQUE




B7 LONG

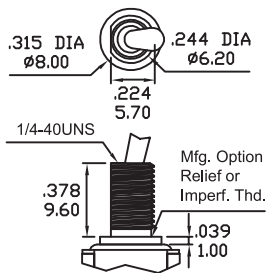


B8 METRIC

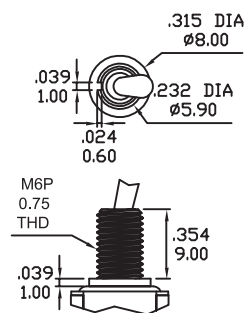


B9 SPLASH-PROOF

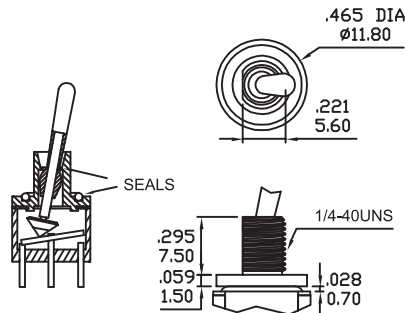


BL LOCKING LEVER

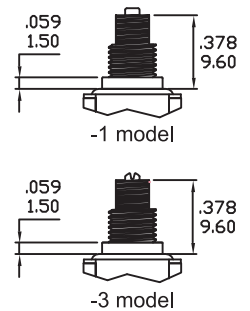


BA THD For T6

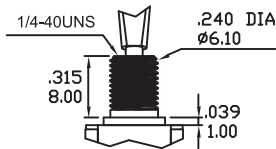

BB NON-THD For T6




BE HIGH TORQUE For T6

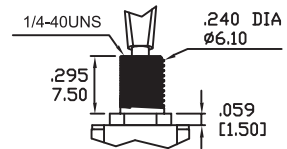


PANEL MOUNTING

1/4 INCH BUSHING

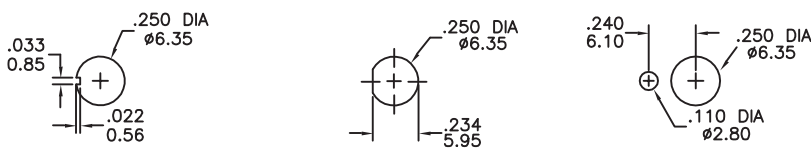


15/32 INCH BUSHING

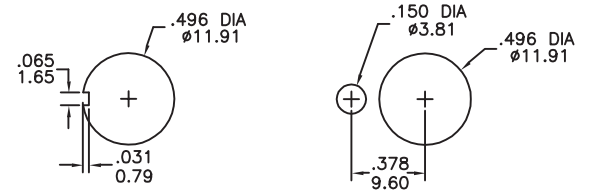


TERMINATION OPTIONS


M1 STD. SOLDER LUG




M2 PC THRU-HOLE



M3 QUICK CONNECT



M5 WIRE WRAP







OPTION CODE	DIM.'A'
M5-1	.750(19.05)
M5-2	.964(24.48)
M5-3	.425(10.80)
M5-4	1.062(26.97)

TERMINATION OPTIONS

M6



P.C.MOUNTING



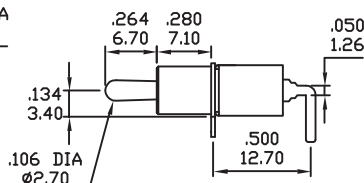



SPDT

M6






P.C.MOUNTING

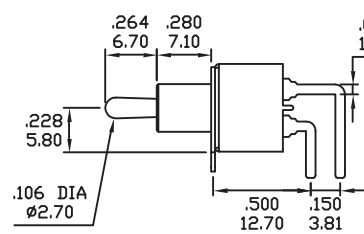


DPDT

M6

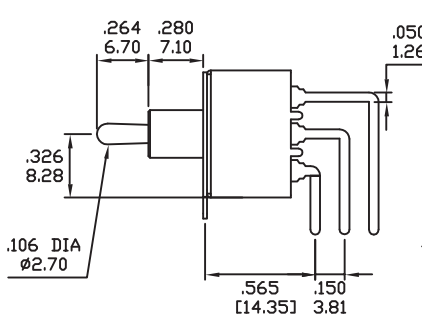

P.C.MOUNTING







3PDT

M7



P.C.MOUNTING



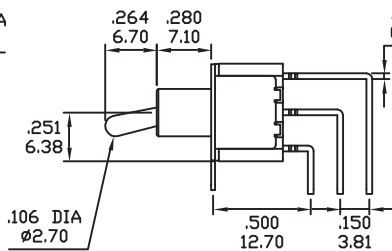



SPDT

M7






P.C.MOUNTING

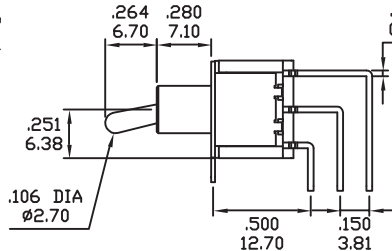


DPDT

TERMINATION OPTIONS

M7



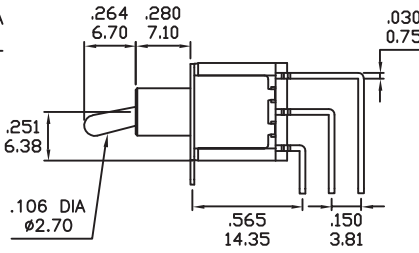



P.C.MOUNTING




3PDT

M7

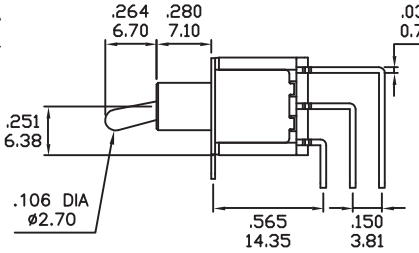



P.C.MOUNTING

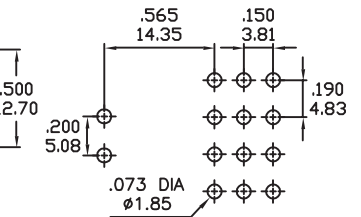


4PDT

VS2-VS3





OPTION CODE	DIM.'A'
VS2	.461 11.70
VS3	.630 16.00

P.C.MOUNTING




SPDT

VS2-VS3






OPTION CODE	DIM.'A'
VS2	.461 11.70
VS3	.630 16.00

P.C.MOUNTING




DPDT

VS4-VS5

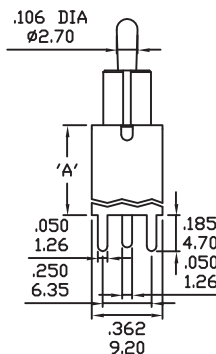

OPTION CODE	DIM.'A'
VS4	.461 11.70
VS5	.630 16.00


P.C.MOUNTING




SPDT

TERMINATION OPTIONS

VS4-VS5




DPDT




OPTION CODE	DIM. 'A'
VS4	.461 11.70
VS5	.630 16.00

P.C.MOUNTING




SNAP-IN TERMINATION OPTIONS


M61 (AVAILABLE WITH SPDT AND DPDT)




VS21,VS31

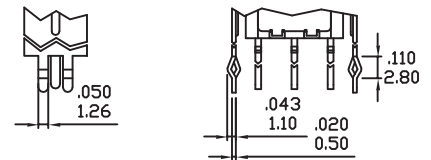

M71 (AVAILABLE WITH SPDT AND DPDT)

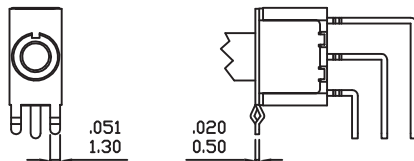

VS41,VS51

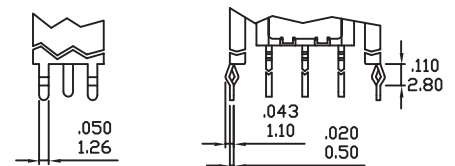


* PC Mounting for M61,M71,VS21,VS31,VS41,VS51 refer to M6,M7,VS2,VS3,VS4,VS5 respectively.


HARDWARE

NUT


STD. HDW2



DRESS NUT HDW3

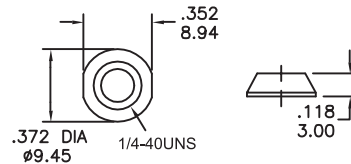


HDW4 - FOR T7,T8 ONLY

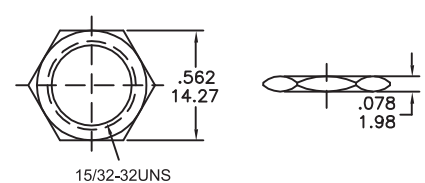


LOCKING RING


STD. HDW15



STD. HDW16




HDW17 - FOR T7,T8 ONLY




LOCK WASHER

STD. HDW11



HDW12 - FOR T7,T8 ONLY




TOGGLE CAPS

T1 ACTUATOR CAP




* MATERIAL: PVC.

T2 ACTUATOR CAP




* MATERIAL: PVC.

T9 ACTUATOR GLOSS PLASTIC



* MATERIAL: ABS.


E1 RUBBER HOOD



E1=INCH (STD.)
 E1A=INCH WITH INTERNAL-ORING SEALED
 K1=METRIC M6P0.75 THD (For B8 bushing only)

* FOR T1 ACTUATOR ONLY.

YE1A06 RUBBER HOOD

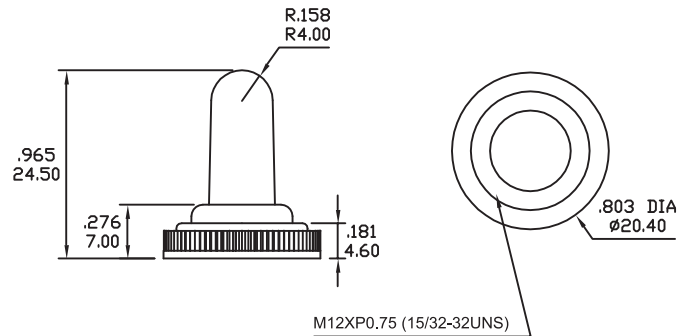

* FOR T8 ACTUATOR ONLY.

CONTACT MATERIAL OPTIONS

Coding	Contact Material	Terminal Plating	Rating	Agency Approvals
Q	Silver ¹	Silver plated ¹	5Amps @ 125VAC or 28VDC 2Amps @ 250VAC	
P		Tin plated ^{5 7}		
R	Gold ²	Gold plated ⁴	0.4VA max @ 20V max (AC or DC)	
K		Tin plated ^{5 6}		
G	Silver ¹	Gold over silver ³	5Amps @ 125VAC or 28VDC 2Amps @ 250VAC	

1. Movable Contact / Terminals: Copper alloy, silver plated.
2. Movable Contact: Copper alloy with gold plated over nickel plated.
3. Terminals: Silver plated with outer layer in gold plating.
4. Terminals: Copper alloy, with gold plated over nickel plated.
5. Outer Terminals: Copper alloy with pure tin plated.
6. Terminal Contact: Gold plated over nickel plated.
7. Terminal Contact: Palladium nickel alloy (or Silver) plated.

* P, K not available with M1 and M3 terminals

* 6Amps (Movable Contact: coin silver, silver plated) available to model ON-NONE-ON without UL approval