

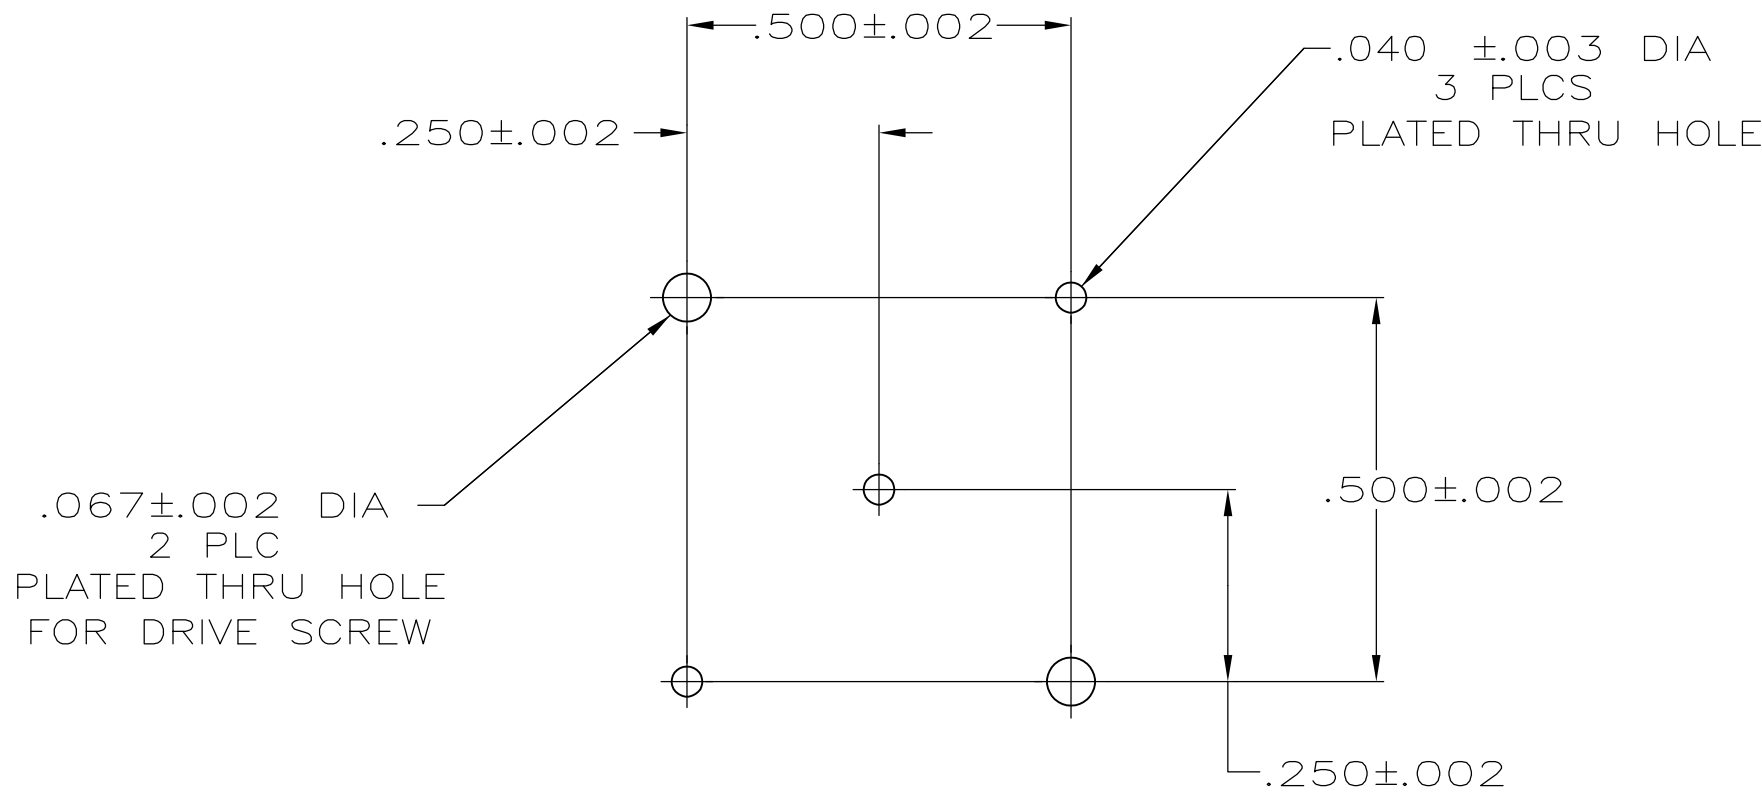
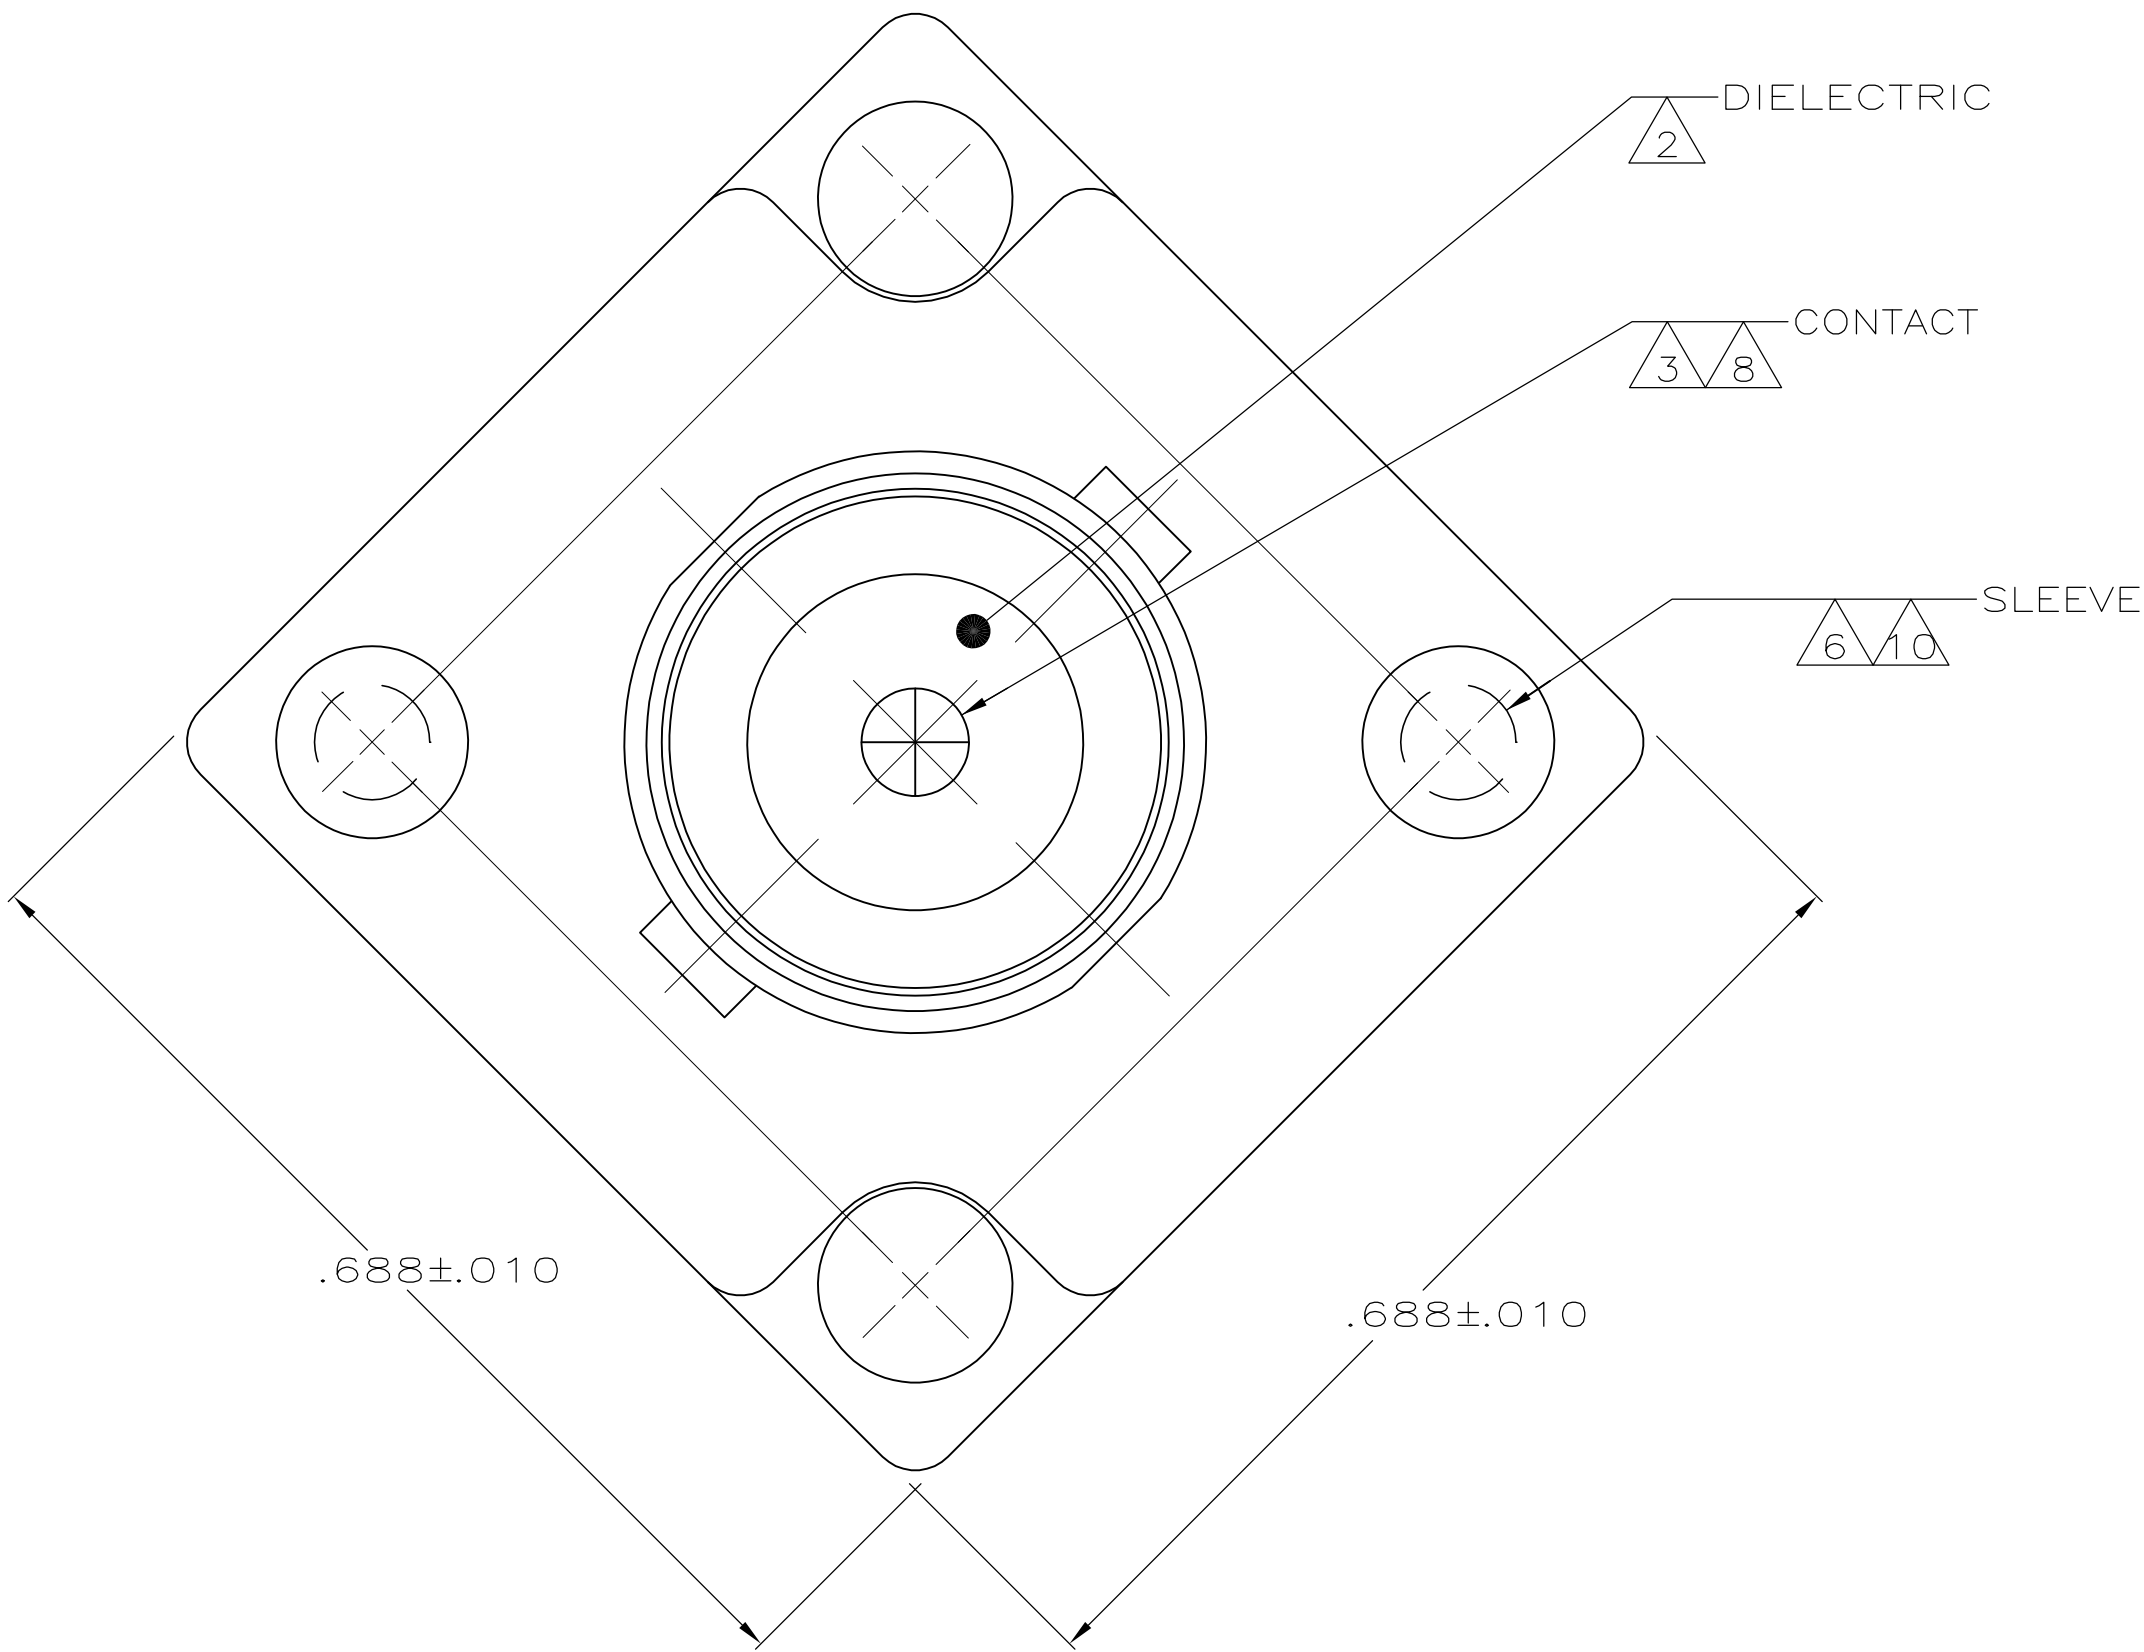


LOC		DIST		REVISIONS						
AJ		16		P	LTR	DESCRIPTION		DATE	DWN	APVD
					A	REV PER ECO 08-003548		15FEB2008	DW	FB

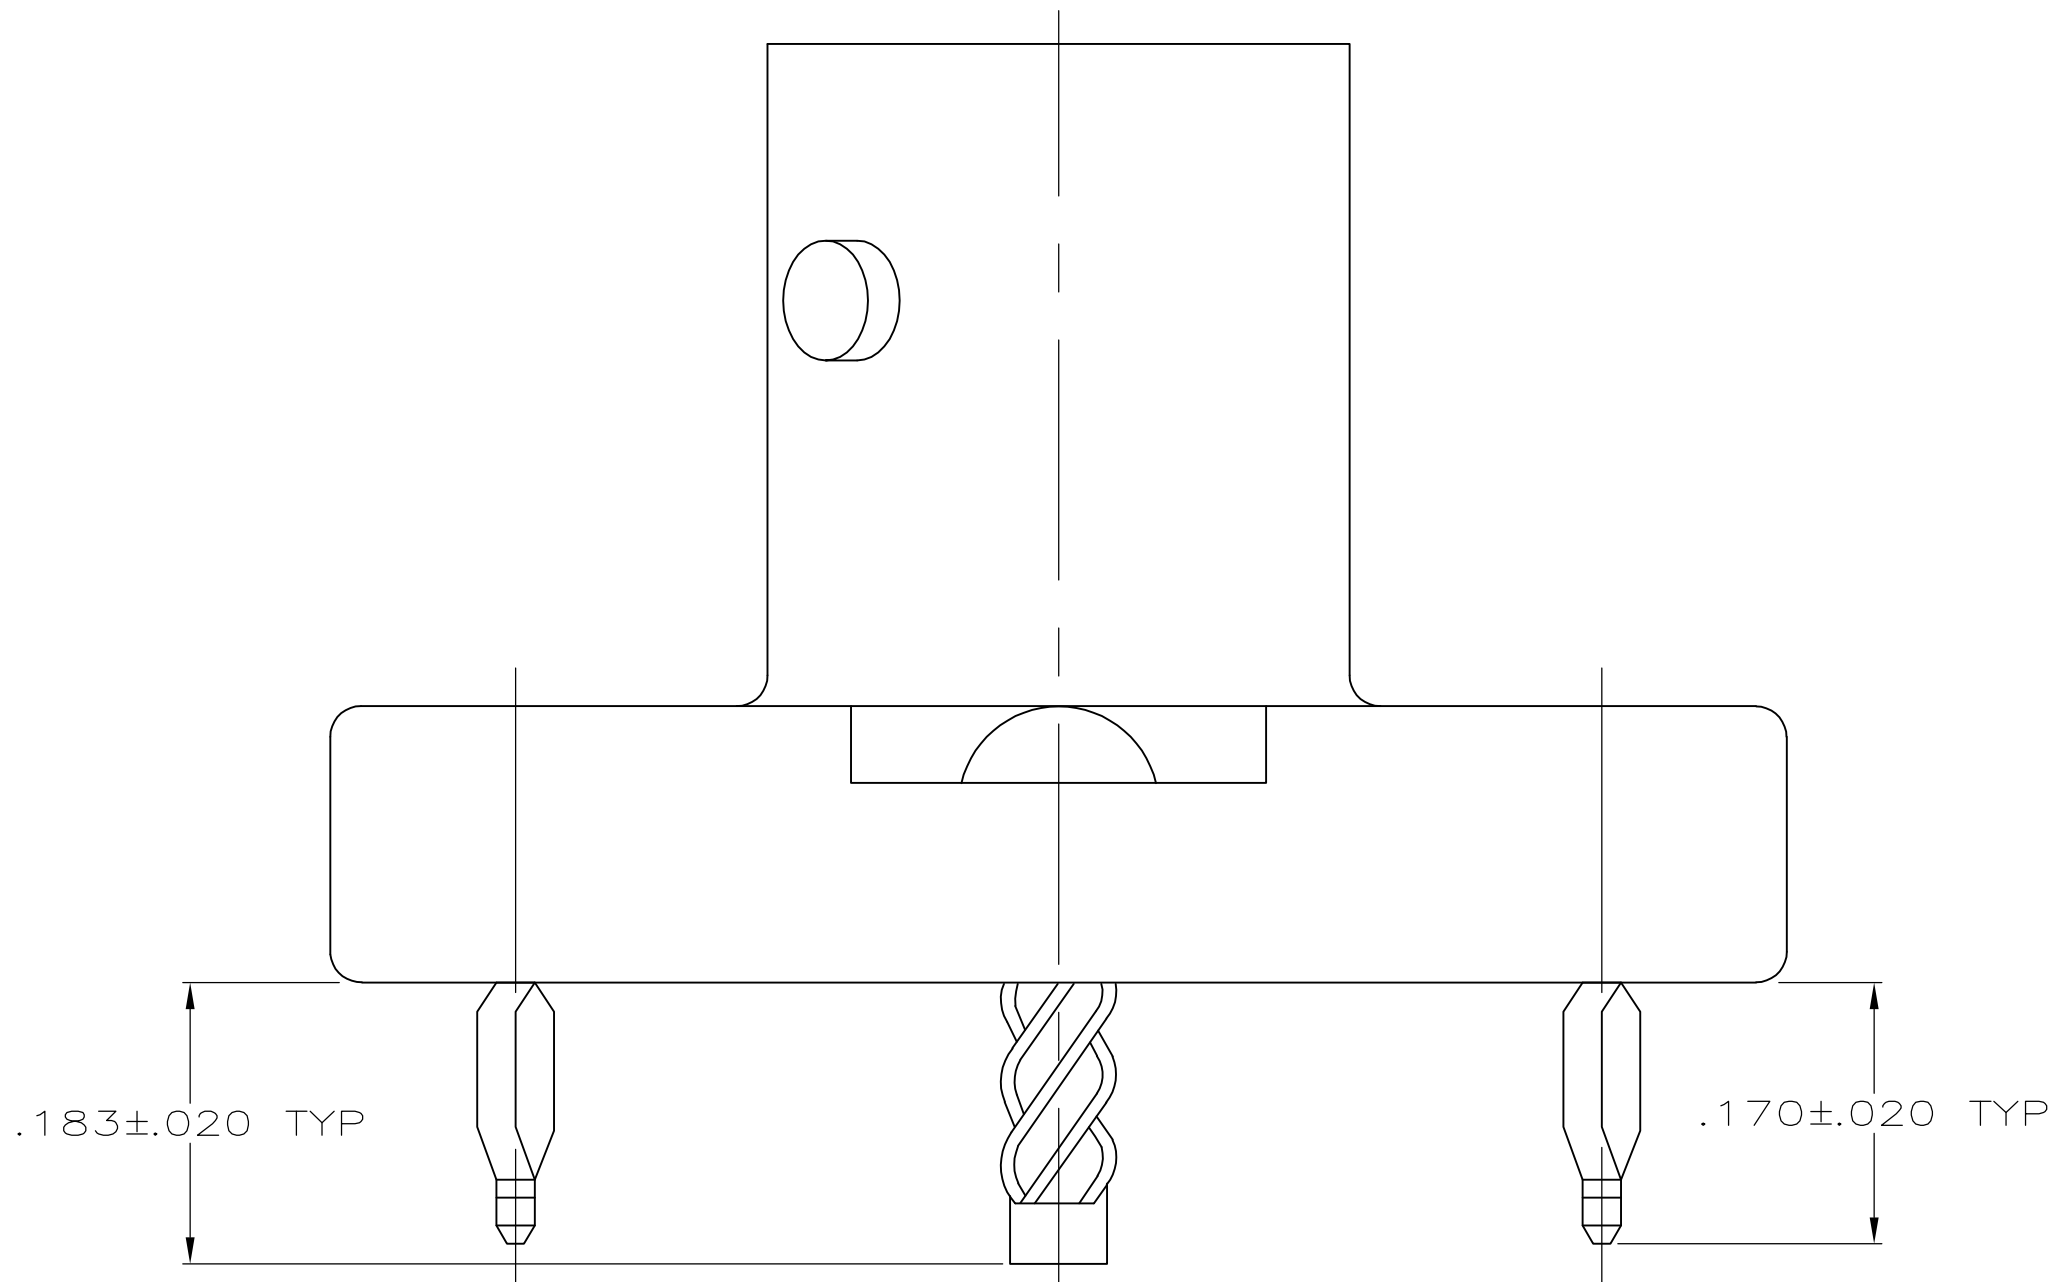

PCB CONFIGURATION
SCALE 4:1

- 1 ZINC PER QQ-Z-363
- 2 PTFE PER MIL-P-19468
- 3 BERYLLIUM COPPER PER QQ-C-530
- 4 COPPER NICKEL ALLOY PER ASTM-B-122
- 5 STAINLESS STEEL PER ASTM-A-582
- 6 BRASS PER QQ-B-626
- 7 NICKEL PLATE PER QQ-N-290, .000200 MINIMUM THICKNESS
- 8 GOLD PLATE PER MIL-G-45204, .000030 - .000055 MINIMUM THICKNESS
- 9 PASSIVATE PER QQ-P-35
- 10 TIN PLATE PER ASTM-B-545, .000100 - .000200 MINIMUM THICKNESS
- 11 PREPARE BOARD AND TERMINATE PER APPLICATION SPEC 114-12001
- 12. SEE INSTRUCTION SHEET 408-9194.
- 13 GOLD PLATE PER MIL-G-45204.

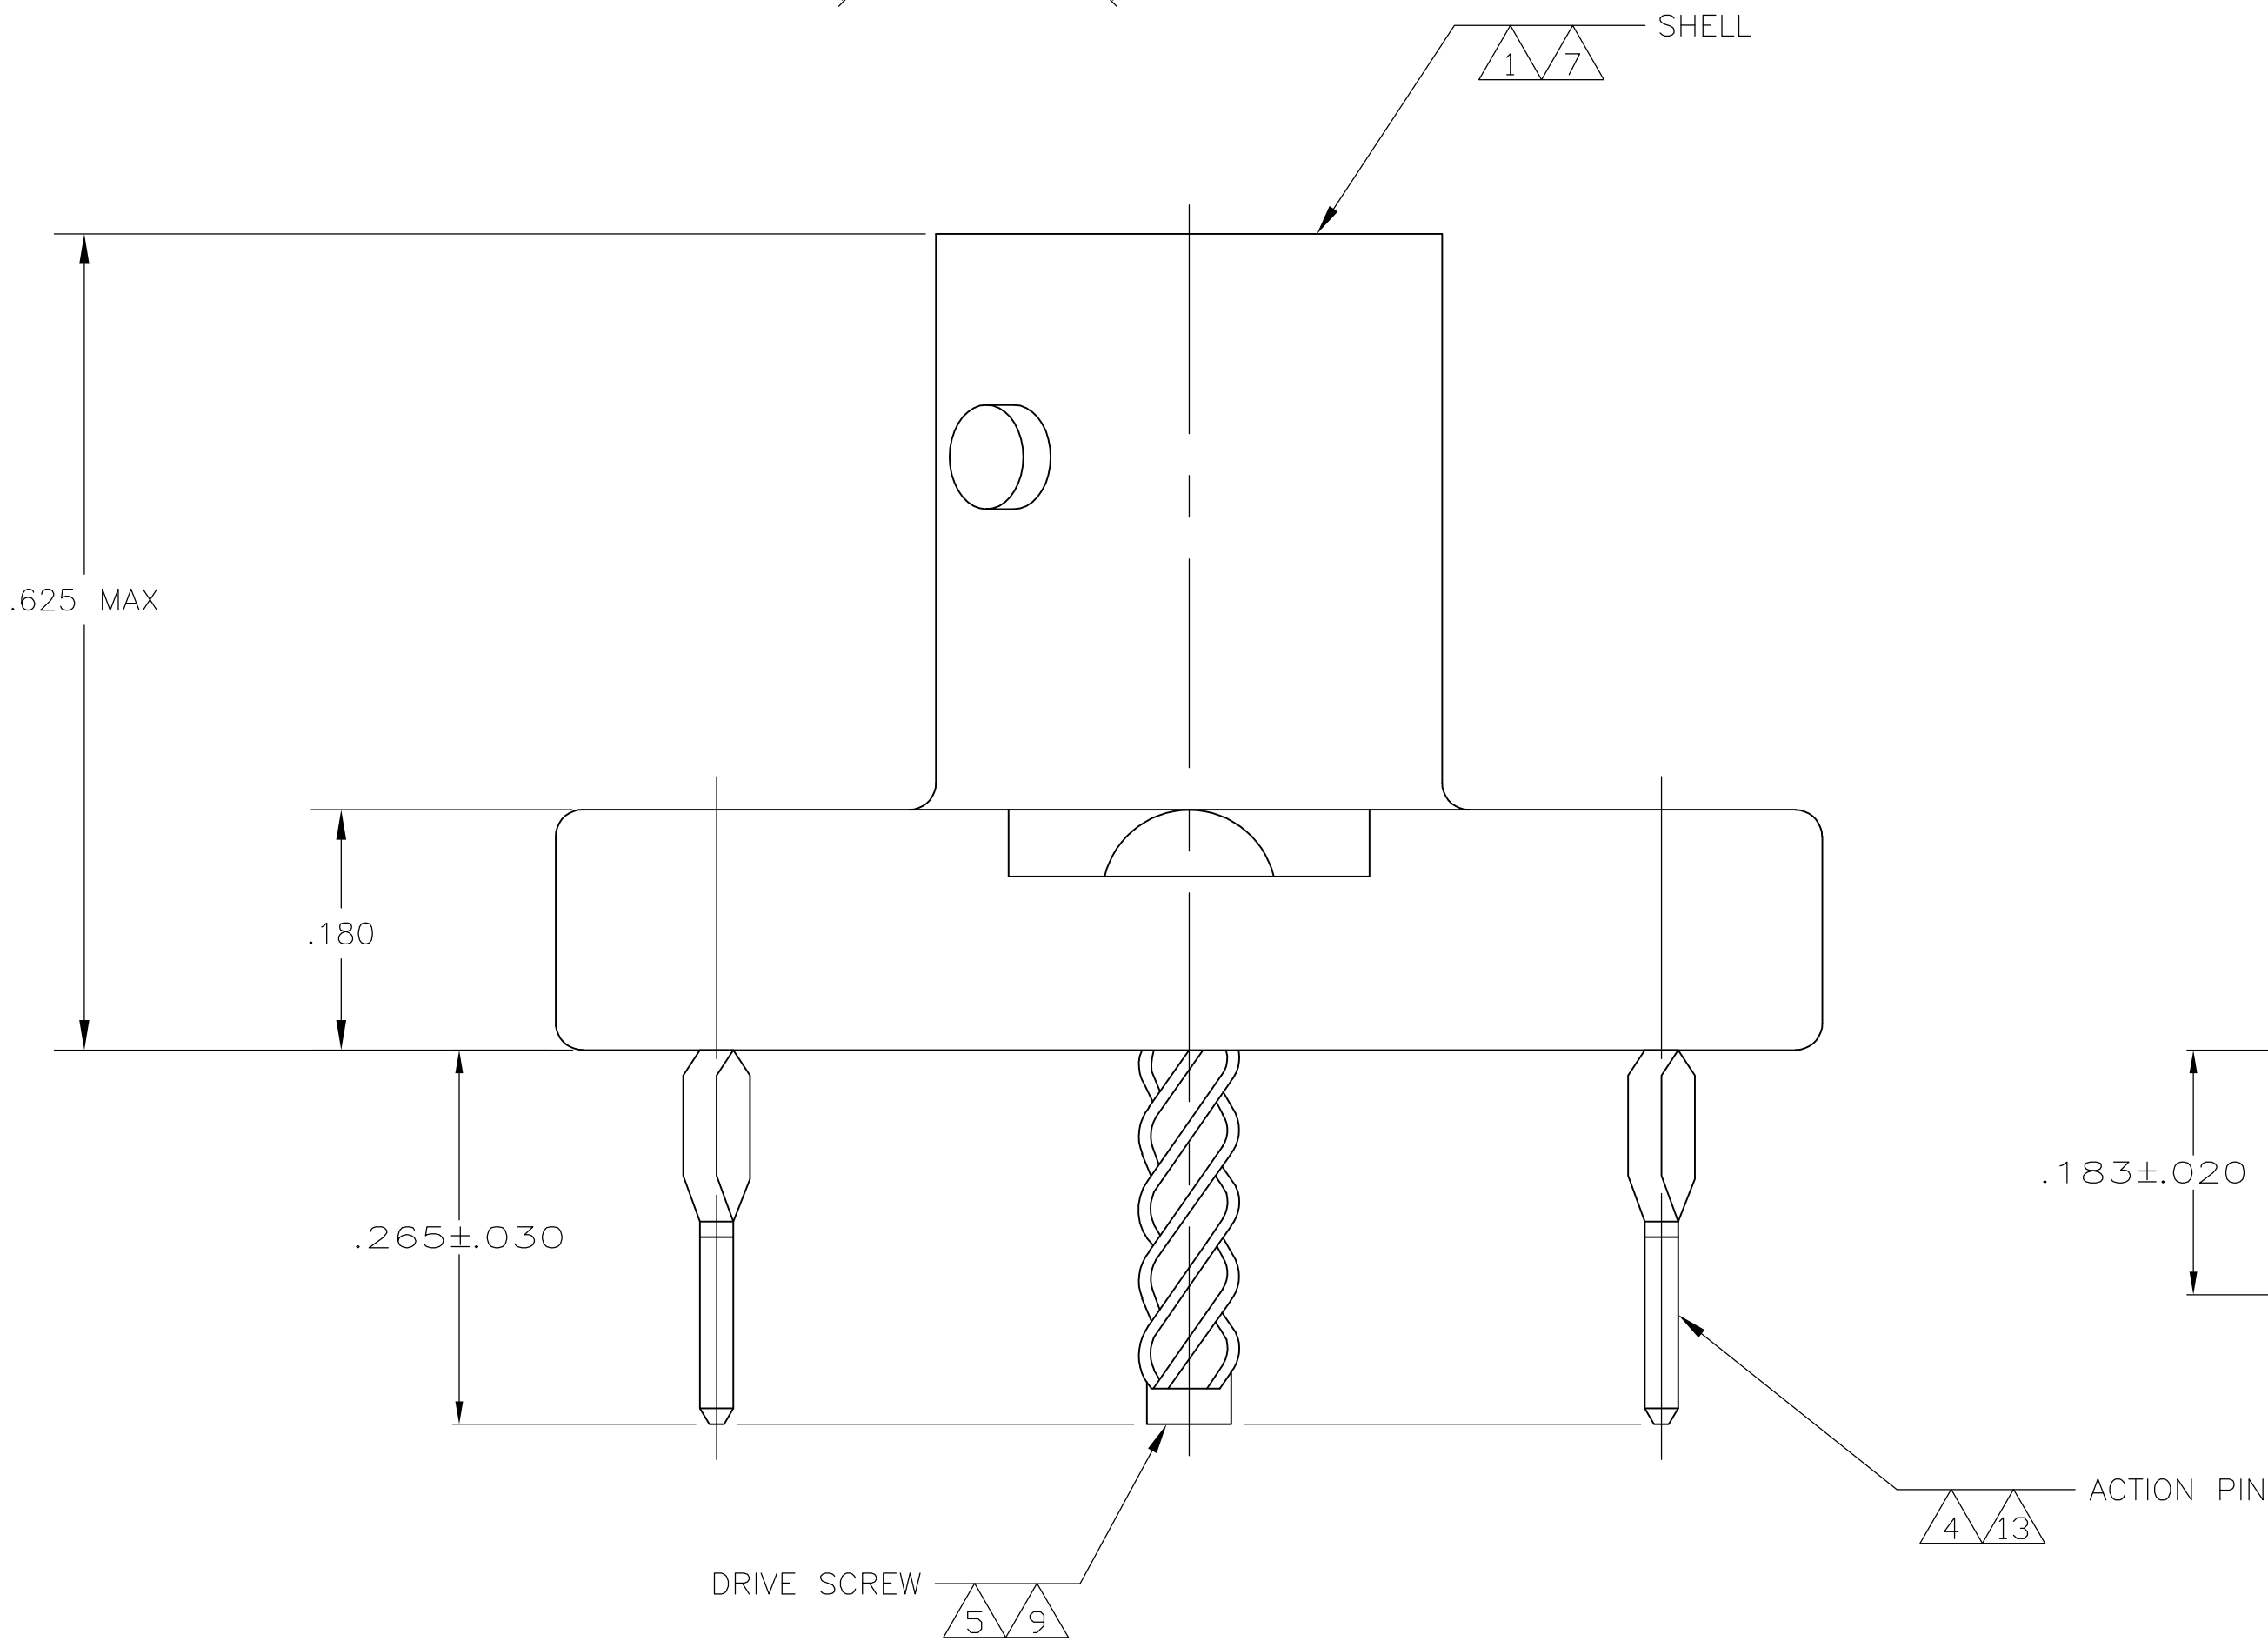

VIEW B
SAME AS VIEW A
EXCEPT AS SHOWN

A	5221336-4
B	5221336-3
VIEW	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 21APR2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK J. HAVENER - 21APR2005	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. LIPPERT - 21APR2005	PRODUCT SPEC	
		108-12103		RESTRICTED TO
APPLICATION SPEC		SIZE		
MATERIAL THRU 6		WEIGHT		CAGE CODE
FINISH THRU 10, 13		A100779		DRAWING NO
		C=5221336		SCALE
		CUSTOMER DRAWING		SHEET
				1 OF 1
				REV A