



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1447	A	RELEASED	HO	5/13/03	JWM	5/13/03	DJC	5/13/03
1885	B	UPDATED TO ROHS COMPLIANT	EO	02/04/06	HO	2/6/06	HO	2/6/06

Description: A silicon epitaxial PNP planar transistor in a TO-39 type package designed for use as drivers for high power transistors in general purpose amplifier and switching circuits.

Absolute Maximum Ratings:

- Collector-Emitter Voltage, $V_{CEO} = 100V$
- Collector-Base Voltage ($I_E = 0$), $V_{CBO} = 100V$
- Emitter-Base Voltage ($I_C = 0$), $V_{EBO} = 4V$
- Collector Current, $I_C = 1A$
- Base Current, $I_B = 500mA$
- Total Device Dissipation ($T_C = +25^\circ C$), $P_{tot} = 10W$
- Total Device Dissipation ($T_A = +25^\circ C$), $P_{tot} = 1W$
- Operating Junction Temperature, $T_J = +200^\circ C$
- Storage Temperature Range, $T_{stg} = -65^\circ C$ to $+200^\circ C$
- Thermal Resistance, Junction-to-Case, $R_{thJC} = 17.4^\circ C/W$
- Thermal Resistance, Junction-to-Ambient, $R_{thJA} = 175^\circ C/W$




RoHS
Compliant

Dimensions	A	B	C	D	E	F	G	H	J	K	L
Min.	8.50	7.74	6.09	0.40	-	2.41	4.82	0.71	0.73	12.70	42°
Max.	9.39	8.50	6.60	0.53	0.88	2.66	5.33	0.86	1.02	-	48°

Electrical Characteristics: ($T_A = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 100V, I_E = 0$	—	1	μA
	I_{CEO}	$V_{CE} = 70V, I_B = 0$	—	10	μA
	I_{CEV}	$V_{CE} = 100V, V_{BE} = -1.5V$	—	1	μA
		$V_{CE} = 100V, V_{BE} = -1.5V, T_C = +150^{\circ}C$	—	1	mA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 4V, I_C = 0$	—	1	μA
Collector–Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 10mA, I_B = 0$, Note 1	100	—	V
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 250mA, I_B = 25mA$, Note 1	—	0.6	V
		$I_C = 500mA, I_B = 50mA$, Note 1	—	1	V
		$I_C = 1A, I_B = 200mA$, Note 1	—	2	V
Base–Emitter Voltage	$V_{BE(on)}$	$V_{CE} = 2V, I_C = 250mA$	—	1	V
DC Current Gain	h_{FE}	$I_C = 250mA, V_{CE} = 2V$, Note 1	40	150	
		$I_C = 1A, V_{CE} = 2V$, Note 1	5	—	
Transition Frequency	f_T	$V_{CE} = 10V, I_C = 100mA, f = 10MHz$	30	—	MHz
Collector–Base Capacitance	C_{cbo}	$V_{CB} = 20V, I_E = 0, f = 1MHz$	—	50	pF
Small–Signal Current Gain	h_{fe}	$V_{CE} = 1.5V, I_C = 200mA, f = 1kHz$	40	—	

Note 1. Pulse Duration: 300 μs , Duty Cycle $\leq 2\%$.

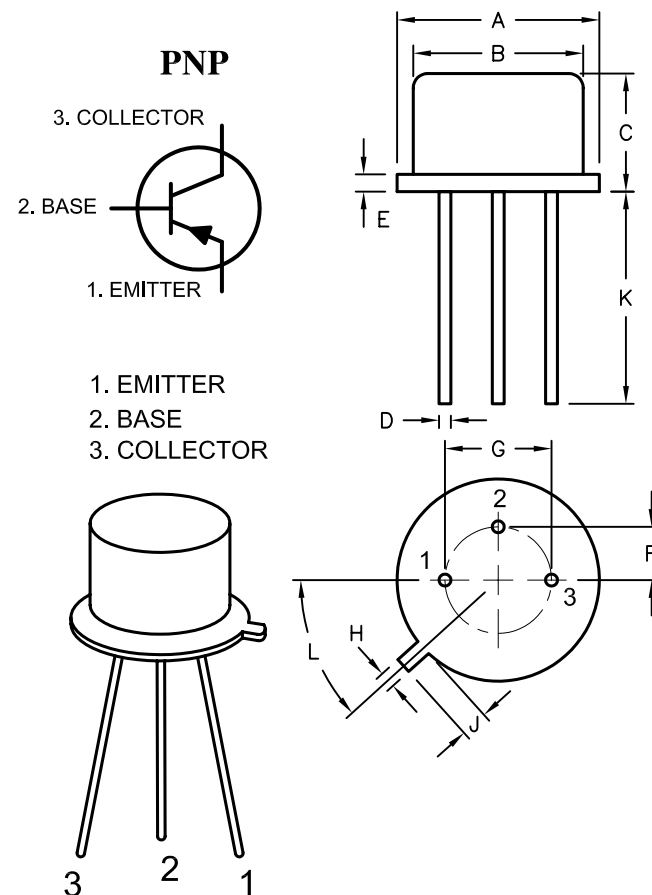

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	5/13/03
CHECKED BY:	DATE:
JEFF MCVICKER	5/13/03
APPROVED BY:	DATE:
DANIEL CAREY	5/13/03

DRAWING TITLE:

Transistor, Bipolar, Amplifier & Switching, PNP, TO-39

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	2N5679	35C0728.DWG	B
SCALE: NTS		U.O.M.: Millimeters	SHEET: 1 OF 1