

POWERLINE - DC/DC-Converter

A-Series, 3W, 1.6 kV Isolation, Regulated, 2:1 Wide Input Range (Single & Dual Output)

RECOM

Features


- 3 Watts Regulated Output Power
- 2:1 Wide Input Voltage Range
- Five-Sided Shield
- High Efficiency up to 82%
- Standard DIP24 & SMD Package
- Over Current Protection
- International Safety Standard Approvals
- UL 1950 Component Recognised



Selection Guide 12V, 24V and 48V Input Types

Part Number	SMD Suffix	Input Range	Output Voltage	Output Current	Input Current (see note 4)	Efficiency (see note 5)	Capacitive Load max. μ F
DIP24		VDC	VDC	mA	mA	%	
RP03-123.3SA	(SMD)	9-18	3.3	500	196	74	2200
RP03-1205SA	(SMD)	9-18	5	500	289	76	1000
RP03-1212SA	(SMD)	9-18	12	250	329	80	220
RP03-1215SA	(SMD)	9-18	15	200	325	81	150
RP03-1205DA	(SMD)	9-18	$\pm$ 5	$\pm$ 250	282	78	$\pm$ 470
RP03-1212DA	(SMD)	9-18	$\pm$ 12	$\pm$ 125	329	80	$\pm$ 100
RP03-1215DA	(SMD)	9-18	$\pm$ 15	$\pm$ 100	321	82	$\pm$ 68
RP03-243.3SA	(SMD)	18-36	3.3	500	101	72	2200
RP03-2405SA	(SMD)	18-36	5	500	149	74	1000
RP03-2412SA	(SMD)	18-36	12	250	171	77	220
RP03-2415SA	(SMD)	18-36	15	200	169	78	150
RP03-2405DA	(SMD)	18-36	$\pm$ 5	$\pm$ 250	149	74	$\pm$ 470
RP03-2412DA	(SMD)	18-36	$\pm$ 12	$\pm$ 125	171	77	$\pm$ 100
RP03-2415DA	(SMD)	18-36	$\pm$ 15	$\pm$ 100	169	78	$\pm$ 68
RP03-483.3SA	(SMD)	36-75	3.3	500	50	73	2200
RP03-4805SA	(SMD)	36-75	5	500	75	74	1000
RP03-4812SA	(SMD)	36-75	12	250	83	79	220
RP03-4815SA	(SMD)	36-75	15	200	84	78	150
RP03-4805DA	(SMD)	36-75	$\pm$ 5	$\pm$ 250	76	73	$\pm$ 470
RP03-4812DA	(SMD)	36-75	$\pm$ 12	$\pm$ 125	83	79	$\pm$ 100
RP03-4815DA	(SMD)	36-75	$\pm$ 15	$\pm$ 100	86	77	$\pm$ 68

RP03-4805SA: Derating Curve

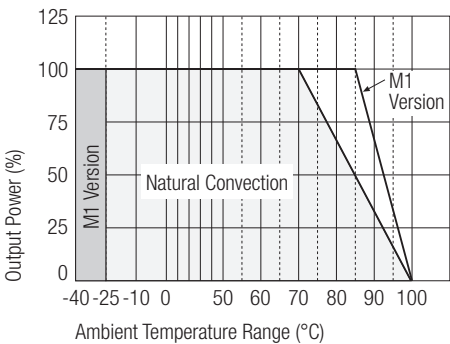

POWERLINE - DC/DC-Converter

A-Series, 3W, 1.6 kV Isolation, Regulated, 2:1 Wide Input Range (Single & Dual Output)



Specifications (typical at nominal input and 25°C unless otherwise noted)

Output Power		3W max.
Voltage Accuracy (full Load and nominal Vin)		±2%
Minimum Load (see note 1)		10% of FL
Line Regulation (LL-HL at full load)		±0.2%
Load Regulation (25% to 100% FL)	Single	±0.2%
	Dual	±1%
Cross Regulation (asymmetrical load 25%/100% FL)		±5%
Ripple and Noise (20MHz bandwith)		50mVp-p
Temperature Coefficient		±0.02%/°C, max.
Transient Response (25% load step change)		200µsec
Over Load Protection (% of full load at nominal Vin)		180% typ.
Short Circuit Protection		Continuous, automatic recovery
Input Voltage Range	12V nominal input	9-18VDC
	24V nominal input	18-36VDC
	48V nominal input	36-75VDC
Input Filter		Pi Type
Input Surge Voltage (100 ms max.)	12V Input	36VDC
	24V Input	50VDC
	48V Input	100VDC
Input Reflected Ripple (nominal Vin and full load)		20mAp-p
Start Up Time (nominal Vin and constant resistor load)		350ms typ.
Efficiency		see „Selection Guide“ table
Isolation Voltage	In to out	1600VDC min.
	I/O to case	DIP type 1600VDC
	I/O to case	SMD type 1000VDC
Isolation Resistance		10 ⁹ Ω min.
Isolation Capacitance		300pF max.
Switching Frequency		300kHz typ.
Approved to Safety Standards		UL 1950, EN60950
Case Material		Nickel-Coated copper
Base Material		Non-conducted black plastic
Potting Material		Epoxy (UL94-V0)
Weight	DIP	16g
	SMD	18g
Dimensions	DIP	31.8 x 20.3 x 10.2mm
	SMD	32.0 x 20.3 x 10.9mm
MTBF (see note 2)		3.155 x 10 ⁶ Hours
Operating Temperature Range	Standard	-25°C to +85°C (with derating)
	M1 (see note 3)	-40°C to +85°C (non-derating)
Maximum Case Temperature		+100°C
Storage Temperature Range		-55°C to +105°C
Thermal Impedance	Natural convection	20°C/Watt
Thermal Shock		MIL-STD-810D
Vibration		10-55Hz, 2G, 30 Min. along X, Y and Z

continued on next page

POWERLINE - DC/DC-Converter

A-Series, 3W, 1.6 kV Isolation, Regulated, 2:1 Wide Input Range (Single & Dual Output)




Specifications continued (typical at nominal input and 25°C unless otherwise noted)

Relative Humidity		5% to 95% RH
Conducted Emissions	EN55022	Level A
Radiated Emissions	EN55022	Level A
Conducted Immunity	EN61000-4-6	Perf. Criteria 2
Radiated Immunity	EN61000-4-3	Perf. Criteria 2
Fast Transient	EN61000-4-4	Perf. Criteria 2
ESD	EN61000-4-2	Perf. Criteria 2

Notes

1. The RP03 A series requires a minimum of 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
2. BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40 °C (Ground fixed and controlled environment).
3. M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than the standard and the M2 version.
4. Maximum value at nominal input voltage and full load of standard type.
5. Typical value at nominal input voltage and full load.

Package Style and Pinning (mm)

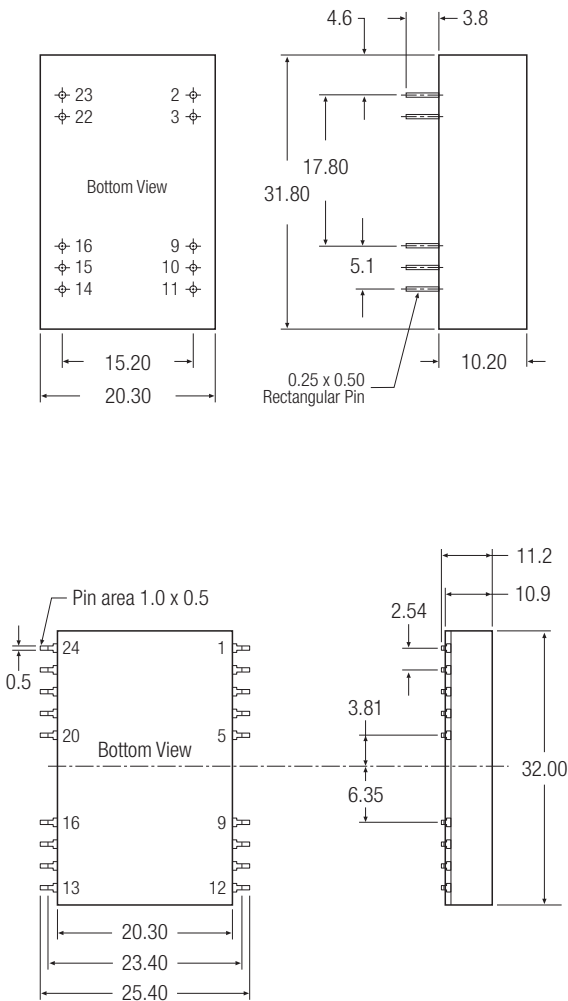

DIP Pin Connections

Pin #	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	NC	NC
11	NC	-VOUT
14	+VOUT	+VOUT
15	NC	NC
16	-VOUT	Common
22	+Vin	+Vin
23	+Vin	+Vin

SMD Pin Connections

Pin #	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	NC	NC
11	NC	-Vout
14	+Vout	+Vout
15	NC	NC
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin
Others	NC	NC

Pin Pitch Tolerance ± 0.35 mm