




< List of part numbers with package codes >

ZRB15XR60J106ME12D, ZRB15XR60J106ME12J

Shape



Notes

Derating1.
Only for mobile devices

References

| Packaging | Specifications | Minimum quantity |
|-----------|---------------------|------------------|
| D | φ180mm Paper taping | 8000 |
| J | φ330mm Paper taping | 30000 |

| Mass (typ.) | |
|-------------|-------|
| 1 piece | 2.8mg |
| φ180mm Reel | 140g |

| | |
|---------------------------------------|--------------|
| L size | 1.0 ±0.2mm |
| W size | 0.5 ±0.2mm |
| T size | 0.65 ±0.15mm |
| External terminal width e | 0.1 to 0.4mm |
| Distance between external terminals g | 0.3mm min. |
| Size code in inch(mm) | 0402 (1005M) |

Specifications

| | |
|--------------------------------------------------|-------------|
| Capacitance | 10µF ±20% |
| Rated voltage | 6.3Vdc |
| Temperature characteristics (complied standard) | X5R(EIA) |
| Capacitance change rate | ±15.0% |
| Temperature range of temperature characteristics | -55 to 85°C |
| Operating temperature range | -55 to 85°C |


Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


Frequency Characteristic |Z|

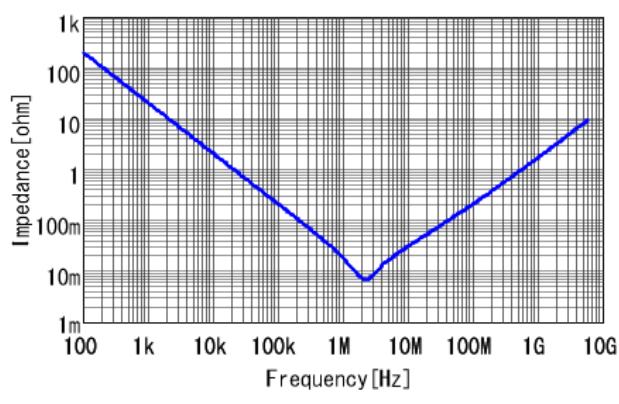


Frequency Characteristic R

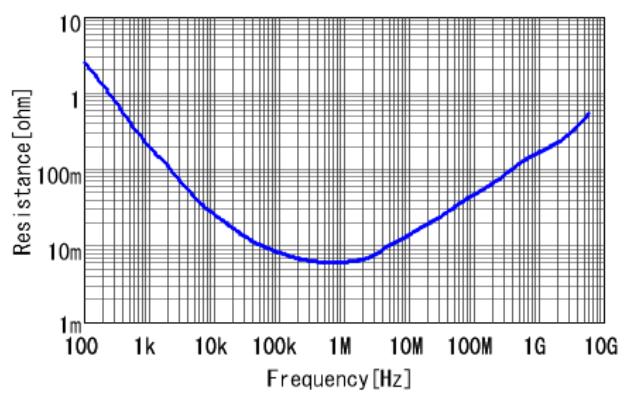


DC bias characteristics

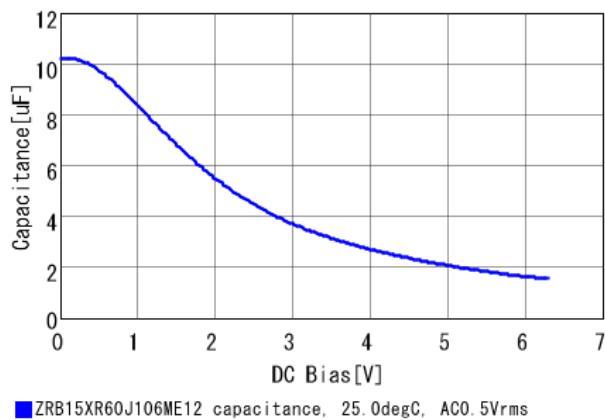


AC Voltage Characteristics

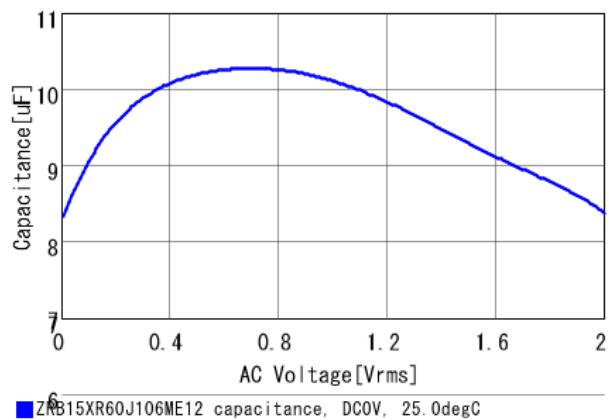

Temperature Characteristics

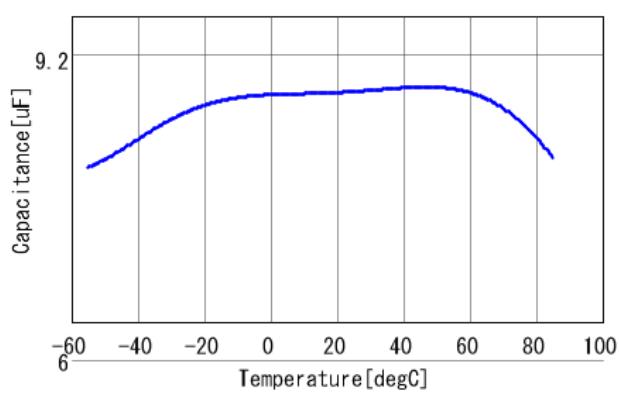

Temp. Rise from ripple Characteristics

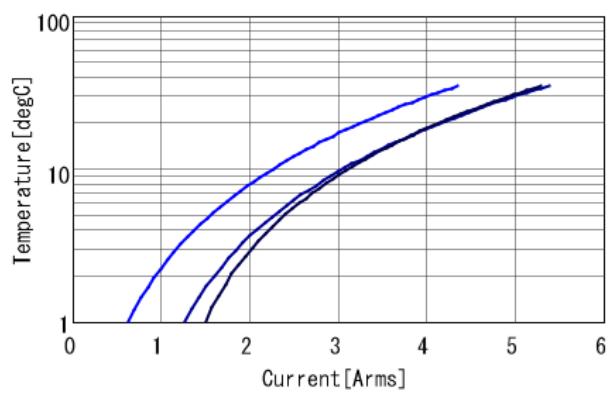

⚠ Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.