

## RGSC-Series





The RGSC-Series Super Curvette rocker switches offer the Curvette styling in a double pole construction with higher electrical ratings and high inrush capabilities. These switches can handle up to 125 amp peak inrush current and can accommodate a wide range of panel cutouts due to the patented mounting ear construction. International ratings are available up to 20 amps.

## Specifications

- Certifications\*: UL, CSA, VDE
- Dielectric Strength: 1,000V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Nylon

\* Due to ongoing technological advances, consult factory for certification specifics.

## Dimensional Specifications: in. [mm]

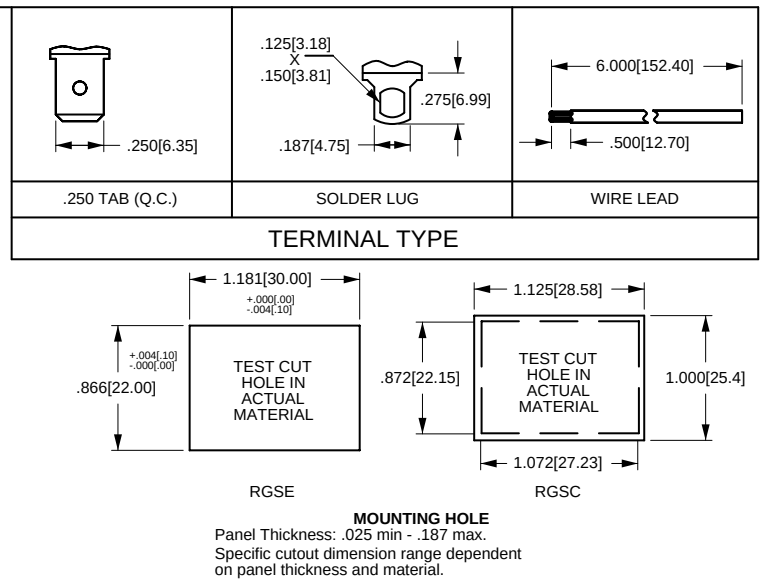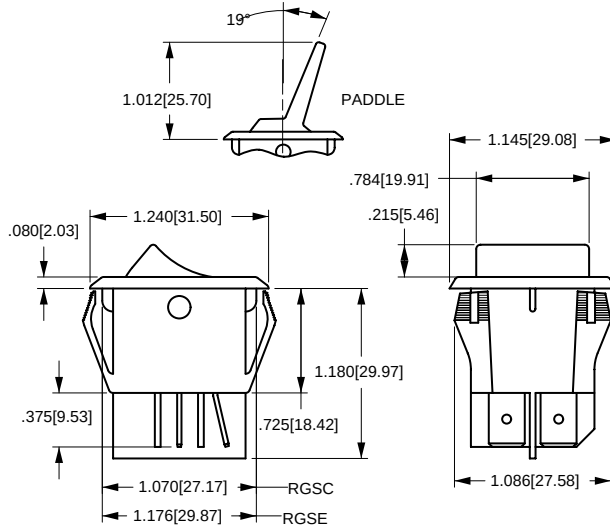

## RGSC

## C

## 70

## 1

## -

## R

## -

## B

## -

## B

## -

## 0

## SERIES

|      |               |
|------|---------------|
| RGSC | STANDARD BASE |
| RGSB | METAL BRACKET |
| RGSE | EUROPEAN BASE |

CIRCUIT<sup>1</sup>

- A** OFF-NONE-ON SINGLE POLE  
**B** ON-NONE-ON SINGLE POLE  
**C** OFF-NONE-ON DOUBLE POLE  
**D** ON-NONE-ON DOUBLE POLE  
**E** POLE 1 ON-NONE-ON POLE 2 OFF-NONE-ON  
**F** POLE 1 ON-NONE-OFF POLE 2 OFF-NONE-ON

RATING<sup>2</sup>

- 20** 15A 250VAC  
20A 125VAC  
3/4HP 125-250VAC  
**21** 15A 250 VAC  
20A 125VAC  
**57** 10A 250VAC 3/4HP  
15A 125VAC 3/4HP  
6A 277VAC 3/4HP  
**70** 15A 250VAC  
20A 125VAC  
3/4HP 125-250VAC  
16(6)A 250VAC T85  
**71** 15A 250VAC  
20A 125VAC  
16(6)A 250VAC T85

## TERMINATION

- 0** SOLDER LUG  
**1** .250TAB (QC)  
**5** WIRE LEAD

## ACTUATOR STYLE

- P** PADDLE  
**R** ROCKER

ACTUATOR COLOR<sup>3</sup>

- B** BLACK  
**W** WHITE

BASE COLOR<sup>3</sup>

- B** BLACK  
**W** WHITE

ROCKER FACE IMPRINTED LEGEND<sup>4</sup>

- 0** NO LEGEND  
**A** OFF-ON (VERTICAL)  
**B** OFF-ON (HORIZONTAL)  
**D** O-I (HORIZONTAL)  
**E** O-I (VERTICAL)  
**F** ON-OFF (VERTICAL)  
**G** ON-OFF (HORIZONTAL)

## NOTES:

Shading indicates standard configurations.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

1 Circuits E and F available with Rating Codes 20, 21 and 57 only.

2 Additional ratings are available. Consult factory.

3 Custom colors are available. Consult factory.

4 White is standard with dark actuators; black is standard with light actuators.