


MATERIALS:
HOUSING: POLYAMIDE, BLACK, UL94V-0.
TERMINALS: COPPER ALLOY, TIN PLATE.
SCREWS: ZINC PLATED, STEEL WITH CLEAR CHROMATE.

ELECTRICAL:
RATING: 25A, 300V.
WIRE RANGE: 12-22 AWG.

MECHANICAL:
MAXIMUM TORQUE RATING: 7 IN-LBS.


1

 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

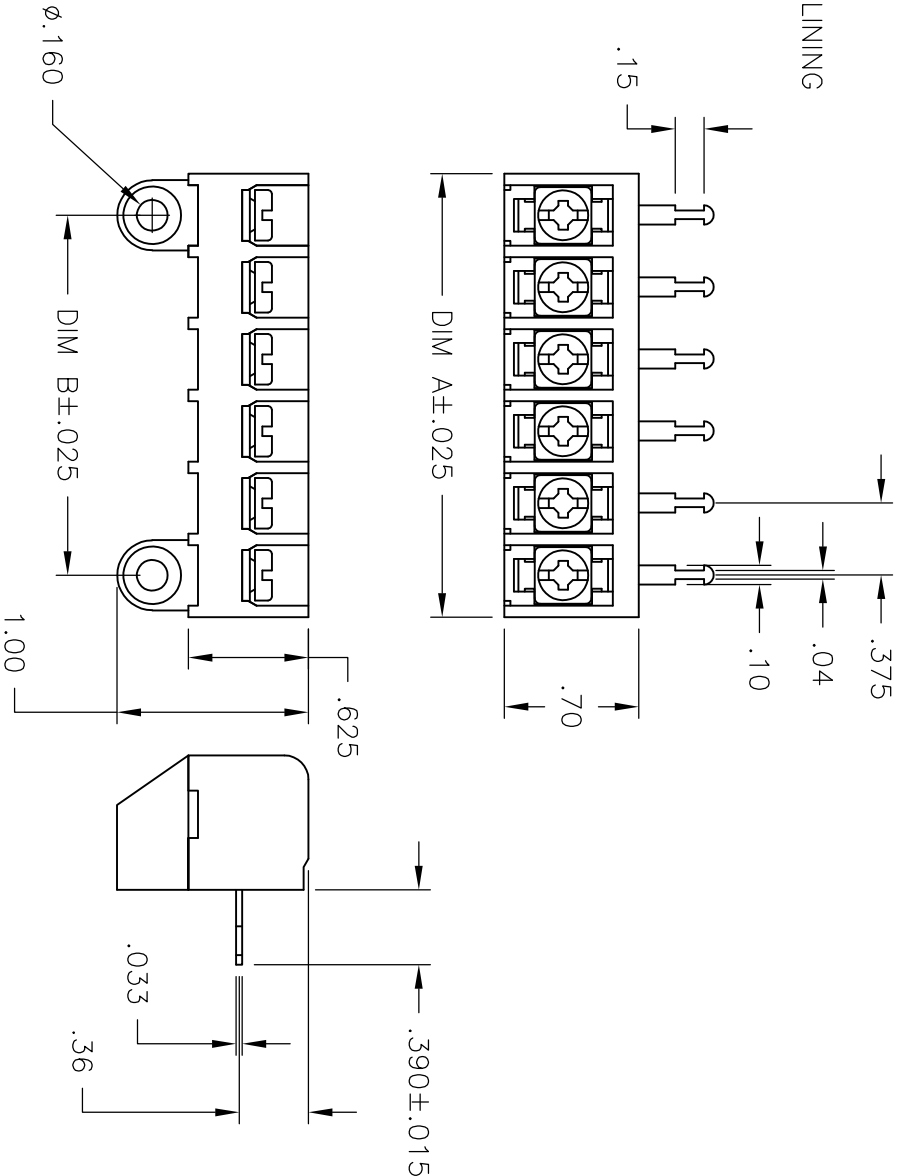

SEE FIG 1 OBSOLETE

SEE FIG 1

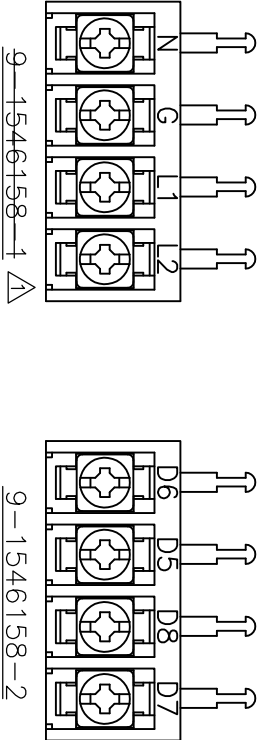

10.875	11.311	30	6STR-30-006	1546816-2
10.500	10.936	29	6STR-29-006	1546816-1
10.125	10.561	28	6STR-28-006	2-1546174-0
9.750	10.186	27	6STR-27-006	1-1546174-9
9.375	9.811	26	6STR-26-006	1-1546174-8
9.000	9.436	25	6STR-25-006	1-1546174-7
8.625	9.061	24	6STR-24-006	1-1546174-6
8.250	8.686	23	6STR-23-006	1-1546174-5
7.875	8.311	22	6STR-22-006	1-1546174-4
7.500	7.936	21	6STR-21-006	1-1546174-3
7.125	7.561	20	6STR-20-006	1-1546174-2
6.750	7.186	19	6STR-19-006	1-1546174-1
6.375	6.811	18	6STR-18-006	1-1546174-0
6.000	6.436	17	6STR-17-006	1546174-9
5.625	6.061	16	6STR-16-006	1546174-8
5.250	5.686	15	6STR-15-006	1546174-7
4.875	5.311	14	6STR-14-006	1546174-6
4.500	4.936	13	6STR-13-006	1546174-1
4.125	4.561	12	6STR-12-006	1546174-5
3.750	4.186	11	6STR-11-006	1546174-4
3.375	3.811	10	6STR-10-006	1546174-3
3.000	3.436	9	6STR-09-006	1546174-2
2.625	3.061	8	6STR-08-006	9-1546158-7
2.250	2.686	7	6STR-07-006	9-1546158-5
1.875	2.311	6	6STR-06-006	6-1437654-7
1.500	1.936	5	6STR-05-006	9-1546158-3
1.125	1.561	4	6STR-04-392	9-1546158-2
1.125	1.561	4	6STR-04-263	9-1546158-1
1.125	1.561	4	6STR-04-006	6-1437654-1
.750	1.186	3	6STR-03-006	5-1437654-6
.375	.811	2	6STR-02-006	5-1437654-3

THIS DRAWING IS A CONTROLLED DOCUMENT.				REVISED PER ECO-11-004917			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DATE		DMN	
INCHES		OTHERWISE SPECIFIED:		8/5/05		S SCHLEGEL	
				8/5/05		CHK S YODER	
				8/5/05		APVD S YODER	
				8/5/05		PRODUCT SPEC	
				8/5/05		APPLICATION SPEC	
				8/5/05		WEIGHT	
				8/5/05		CUSTOMER DRAWING	
				8/5/05		SCALE	
				8/5/05		SHEET	
				8/5/05		1 OF 1	
				8/5/05		REV	
				8/5/05		P	