


SPECIFICATION CONTROL DRAWING

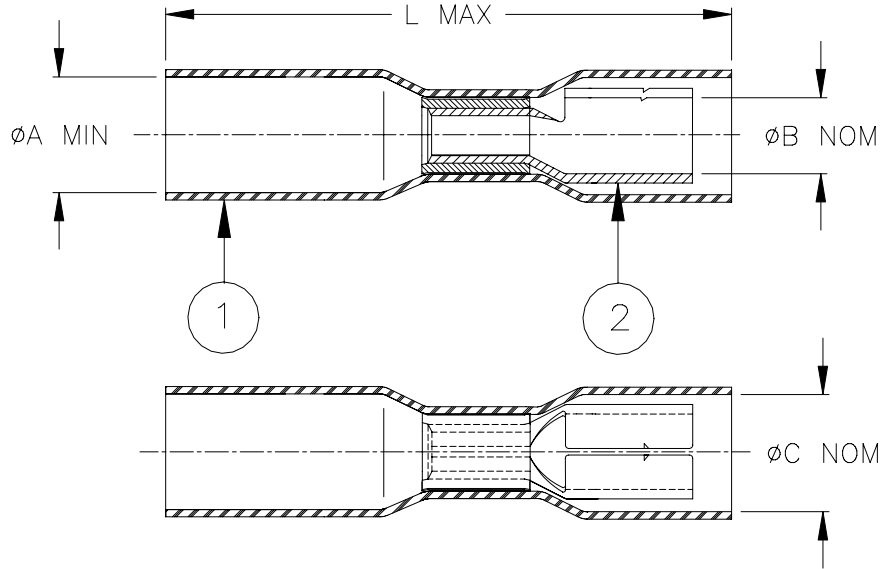

Product Name	Product Dimensions					Wire Dimensions		
	ØA	ØB	ØC	L	Color (1)	Size Range mm ² (AWG)	ØG	
	min	nom	nom	max			min	max
B-106-8401	4.0 [0.160]	4.0 [0.160]	5.5 [0.217]	30 [1.180]	Red	0.5 - 1.0 (AWG 22-18)	1.4 [0.055]	4.0 [0.160]
B-106-8502	4.6 [0.180]	5.0 [0.197]	6.0 [0.236]	32 [1.260]	Blue	1.5 - 2.5 (AWG 16-14)	2.0 [0.080]	4.6 [0.180]


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent color (1), radiation cross-linked modified polyamide with thermoplastic adhesive coating inside.
2. BULLET TERMINAL: Tin-plated brass.
BASE METAL: C260 Brass.
PLATING: Tin-plated per ASTM B545, Class A.

APPLICATION

1. These controlled crimp devices are designed to terminate a tin-plated or bare copper stranded wire having an insulation rated for at least 75°C to a bullet terminal. It will provide a splash proof and strain relief connection.
UL listed wire connector 91J4.
2. Temperature range: -55°C to +125°C.
3. For application tooling and installation, see RPIP-684-00.

For best results, prepare the wire as shown:

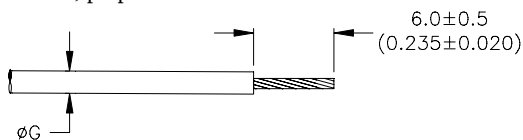

DuraSeal is a trademark of Tyco Electronics Corporation.

tyco <i>Electronics</i>		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		<i>Raychem</i>		TITLE: DURASEAL BULLET RECEPTACLE				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]						DOCUMENT NO.: B-106-8XXX				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.						
DRAWN BY: M. FORONDA		CAGE CODE: 06090		REPLACES: D030375		DCR NUMBER: D060181		SCALE: ---	SIZE: A	SHEET: 1 of 1

© 2006 Tyco Electronics Corporation. All rights reserved.
If this document is printed it becomes uncontrolled. Check for the latest revision.