
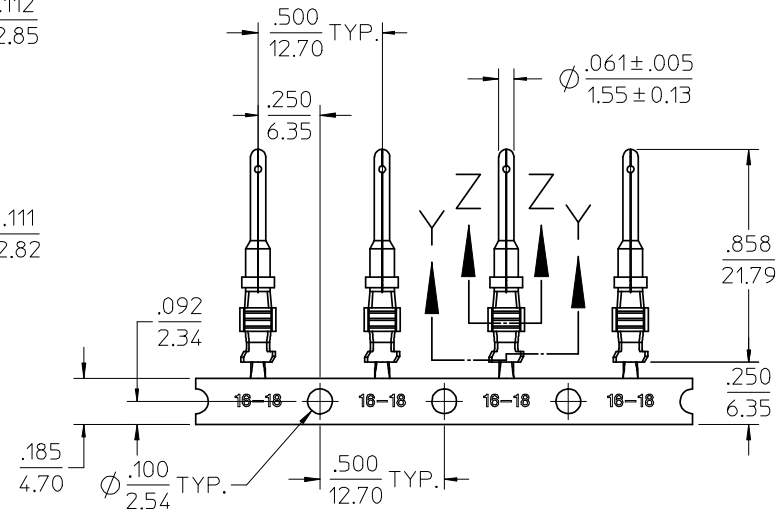
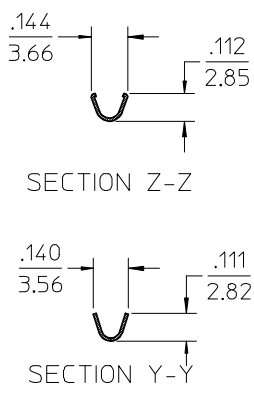
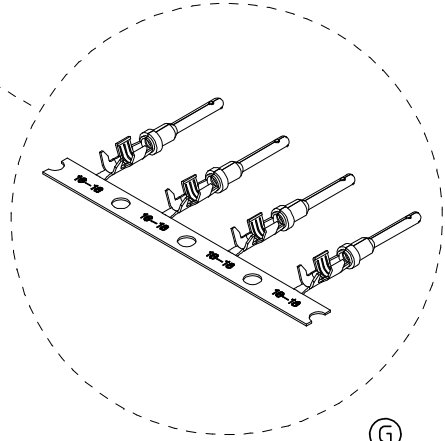


STRIP MATERIAL NUMBER	FINISH
84590-0020	OVERALL NICKEL 80µ" MINIMUM

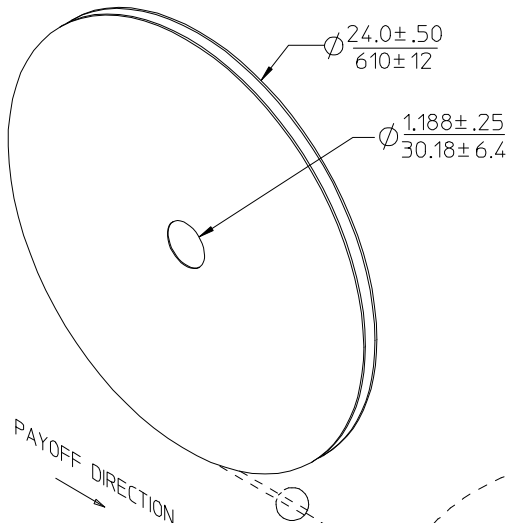

Ⓒ WIRE INSULATION O.D. RANGE .055-.085 / 1.40-2.16

- NOTES:
- 1. MATERIAL: COPPER ALLOY .0120/0.305 THICK.
 - 2. FINISH: SEE CHART.
 - 3. STRIP TERMINALS ARE REELED AS SHOWN ABOVE, 3000 PARTS PER REEL.
 - 4. TERMINAL FOR USE WITH SERIES XRC CONNECTOR ASSEMBLIES.
 - 5. ALL DIMENSIONS ARE REFERENCE.
 - 6. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

UPDATE WIRE INSL. OD EC NO: WNA2008-0261 GDRWINWLEUNG 2008/04/29 CHKD:RDEROSS 2008/04/30 APPR:RDEROSS 2008/05/01 REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .02 1 PLACE ± 0.5 ± --- ANGULAR ± 1 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE IN/MM DRAWN BY DATE RSTONE 10/18/04 CHECKED BY DATE APLAZA 10/18/04 APPROVED BY DATE LROTHAUS 10/18/04 MATERIAL NO. SEE CHART SIZE B	SCALE 2:1 TITLE CONTACT PIN 16-18 AWG Molex MOLEX INCORPORATED DOCUMENT NO. SD-84590-005 SHEET NO. 1 OF 1	DESIGN UNITS INCH THIRD ANGLE PROJECTION	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION