
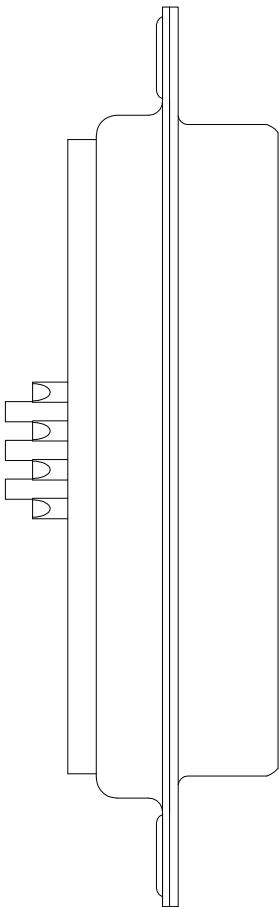


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THAT THE INFORMATION IS CORRECT AND RELIABLE. POSITRONIC MAKES NO WARRANTY, REPRESENTATION OR TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC ASSUMES NO RESPONSIBILITY FOR THE RESULTS OF ANY DESIGN OR CONSTRUCTION BASED ON THE USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK10948

DATE	REV	REVISION RECORD	APP	DR	CK
8-12-09	NC	ECO 31419	RCW	BS	TK

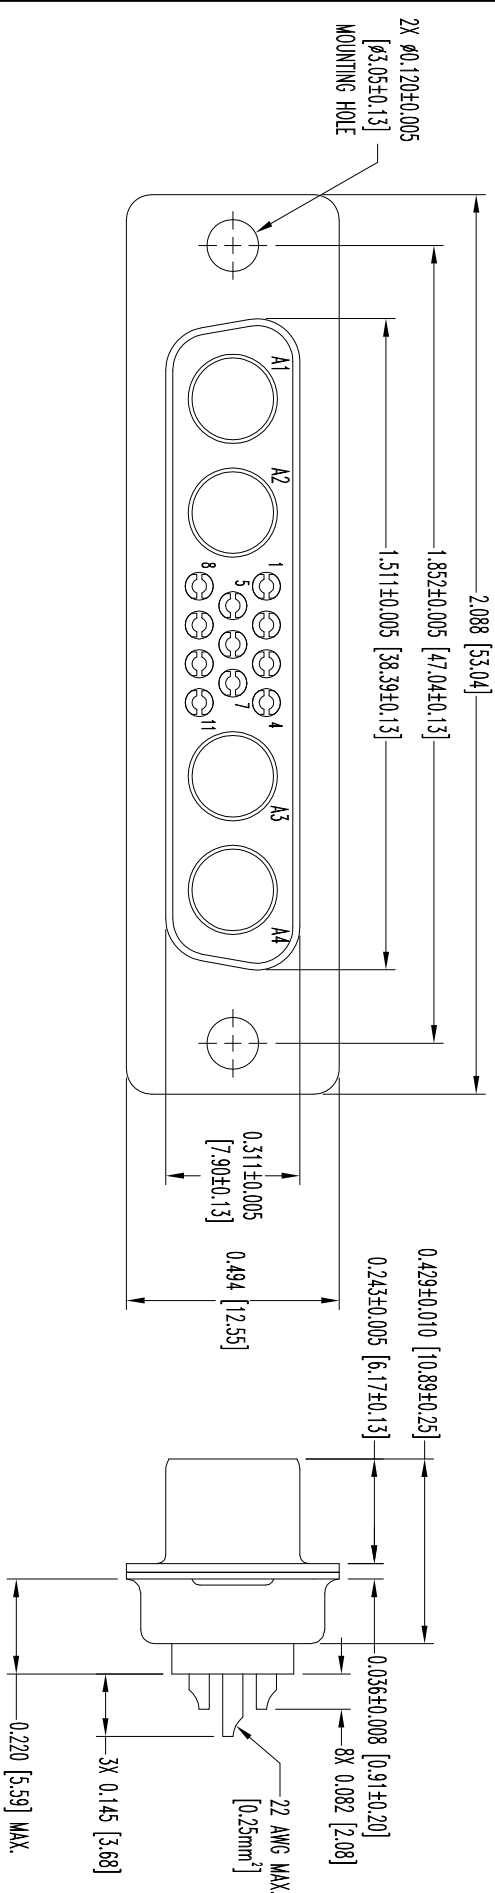

NOTES:

1. MATERIALS AND FINISHES:


INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, COLOR: BLUE.
CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
SHELS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
INITIAL CONTACT RESISTANCE: 0.010 OHMS MAX.
INSULATOR RESISTANCE: 5 G OHMS.
WORKING VOLTAGE: 300 VAC [rms]
TEMPERATURE RANGE: -55°C TO +125°C
DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com



DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

CBDD

SCALE
N.T.S.

DRAWN BY
B SHELLBOY
APPROVED BY
R WILLIAMS

FSCM 28198

TITLE

CBDD15W4F210000

DATE

8-12-09

DRAWING NUMBER

SK10948

REV.

NC