


IRG4PC30S

INSULATED GATE BIPOLAR TRANSISTOR

Standard Speed IGBT

Features


- Standard: Optimized for minimum saturation voltage and low operating frequencies (< 1kHz)
- Generation 4 IGBT design provides tighter parameter distribution and higher efficiency than Generation 3
- Industry standard TO-247AC package



$V_{CES} = 600V$
$V_{CE(on)} \text{ typ.} = 1.4V$
@ $V_{GE} = 15V, I_C = 18A$

Benefits

- Generation 4 IGBTs offer highest efficiency available
- IGBTs optimized for specified application conditions
- Designed to be a "drop-in" replacement for equivalent industry-standard Generation 3 IR IGBTs



Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Breakdown Voltage	600	V
$I_C @ T_C = 25^\circ C$	Continuous Collector Current	34	A
$I_C @ T_C = 100^\circ C$	Continuous Collector Current	18	
I_{CM}	Pulsed Collector Current ①	68	
I_{LM}	Clamped Inductive Load Current ②	68	
V_{GE}	Gate-to-Emitter Voltage	± 20	V
E_{ARV}	Reverse Voltage Avalanche Energy ③	10	mJ
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	100	W
$P_D @ T_C = 100^\circ C$	Maximum Power Dissipation	42	
T_J	Operating Junction and	-55 to + 150	$^\circ C$
T_{STG}	Storage Temperature Range		
	Soldering Temperature, for 10 seconds	300 (0.063 in. (1.6mm) from case)	
	Mounting torque, 6-32 or M3 screw.	10 lbf•in (1.1N•m)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	1.2	$^\circ C/W$
$R_{\theta CS}$	Case-to-Sink, Flat, Greased Surface	0.24	—	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	—	40	
Wt	Weight	6 (0.21)	—	g (oz)

IRG4PC30S

International
IR Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage	600	—	—	V	$V_{GE} = 0V, I_C = 250\mu A$
$V_{(BR)ECS}$	Emitter-to-Collector Breakdown Voltage ④	18	—	—	V	$V_{GE} = 0V, I_C = 1.0A$
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	—	0.75	—	V/ $^\circ\text{C}$	$V_{GE} = 0V, I_C = 1.0mA$
$V_{CE(ON)}$	Collector-to-Emitter Saturation Voltage	—	1.40	1.6	V	$I_C = 18A$
		—	1.84	—		$I_C = 34A$
		—	1.45	—		$I_C = 18A, T_J = 150^\circ\text{C}$
$V_{GE(th)}$	Gate Threshold Voltage	3.0	—	6.0		$V_{CE} = V_{GE}, I_C = 250\mu A$
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	—	-11	—	mV/ $^\circ\text{C}$	$V_{CE} = V_{GE}, I_C = 250\mu A$
g_{fe}	Forward Transconductance ⑤	6.0	11	—	S	$V_{CE} = 100V, I_C = 18A$
I_{CES}	Zero Gate Voltage Collector Current	—	—	250	μA	$V_{GE} = 0V, V_{CE} = 600V$
		—	—	2.0		$V_{GE} = 0V, V_{CE} = 10V, T_J = 25^\circ\text{C}$
		—	—	1000		$V_{GE} = 0V, V_{CE} = 600V, T_J = 150^\circ\text{C}$
I_{GES}	Gate-to-Emitter Leakage Current	—	—	± 100	nA	$V_{GE} = \pm 20V$

Switching Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	—	50	75	nC	$I_C = 18A$
Q_{ge}	Gate - Emitter Charge (turn-on)	—	7.3	11		$V_{CC} = 400V$
Q_{gc}	Gate - Collector Charge (turn-on)	—	17	26		$V_{GE} = 15V$
$t_{d(on)}$	Turn-On Delay Time	—	22	—	ns	$T_J = 25^\circ\text{C}$ $I_C = 18A, V_{CC} = 480V$ $V_{GE} = 15V, R_G = 23\Omega$ Energy losses include "tail" See Fig. 9, 10, 14
t_r	Rise Time	—	18	—		
$t_{d(off)}$	Turn-Off Delay Time	—	540	810		
t_f	Fall Time	—	390	590		
E_{on}	Turn-On Switching Loss	—	0.26	—	mJ	$T_J = 150^\circ\text{C}$, $I_C = 18A, V_{CC} = 480V$ $V_{GE} = 15V, R_G = 23\Omega$ Energy losses include "tail" See Fig. 11, 14
E_{off}	Turn-Off Switching Loss	—	3.45	—		
E_{ts}	Total Switching Loss	—	3.71	5.6		
$t_{d(on)}$	Turn-On Delay Time	—	21	—	ns	$T_J = 150^\circ\text{C}$, $I_C = 18A, V_{CC} = 480V$ $V_{GE} = 15V, R_G = 23\Omega$ Energy losses include "tail" See Fig. 11, 14
t_r	Rise Time	—	19	—		
$t_{d(off)}$	Turn-Off Delay Time	—	790	—		
t_f	Fall Time	—	760	—		
E_{ts}	Total Switching Loss	—	6.55	—	mJ	
L_E	Internal Emitter Inductance	—	13	—	nH	Measured 5mm from package
C_{ies}	Input Capacitance	—	1100	—	pF	$V_{GE} = 0V$
C_{oes}	Output Capacitance	—	72	—		$V_{CC} = 30V$
C_{res}	Reverse Transfer Capacitance	—	13	—		$f = 1.0MHz$

Notes:

- ① Repetitive rating; $V_{GE} = 20V$, pulse width limited by max. junction temperature. (See fig. 13b)
- ② $V_{CC} = 80\%(V_{CES})$, $V_{GE} = 20V$, $L = 10\mu H$, $R_G = 23\Omega$, (See fig. 13a)
- ③ Repetitive rating; pulse width limited by maximum junction temperature.
- ④ Pulse width $\leq 80\mu s$; duty factor $\leq 0.1\%$.
- ⑤ Pulse width $5.0\mu s$, single shot.

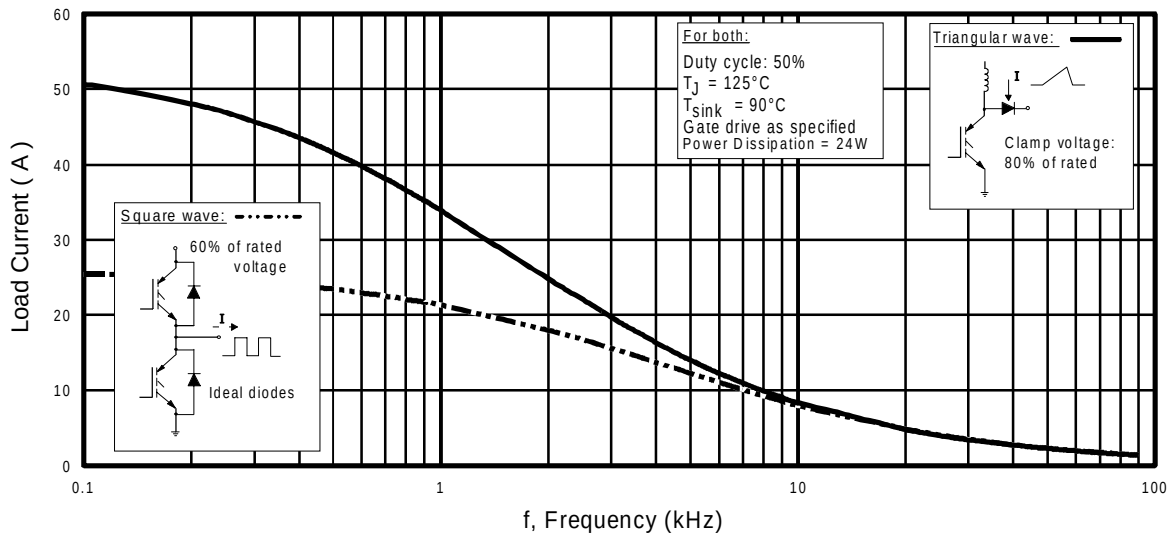


Fig. 1 - Typical Load Current vs. Frequency
(Load Current = I_{RMS} of fundamental)

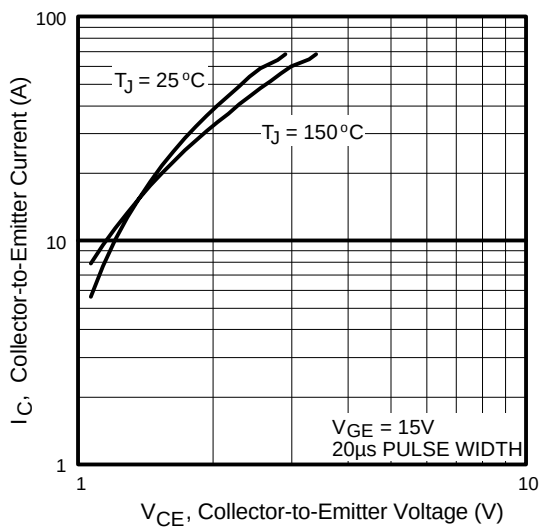


Fig. 2 - Typical Output Characteristics

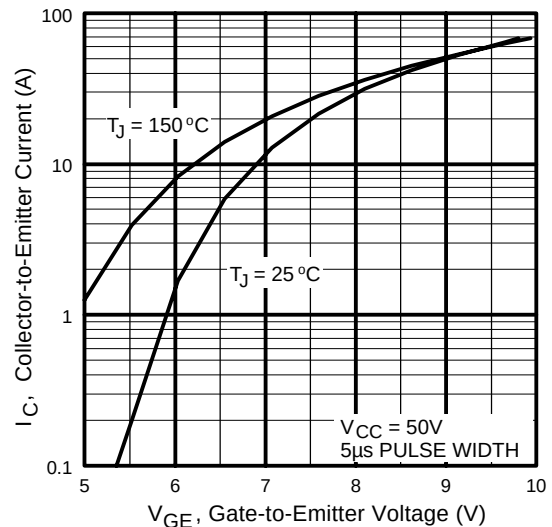


Fig. 3 - Typical Transfer Characteristics

IRG4PC30S

International
IR Rectifier

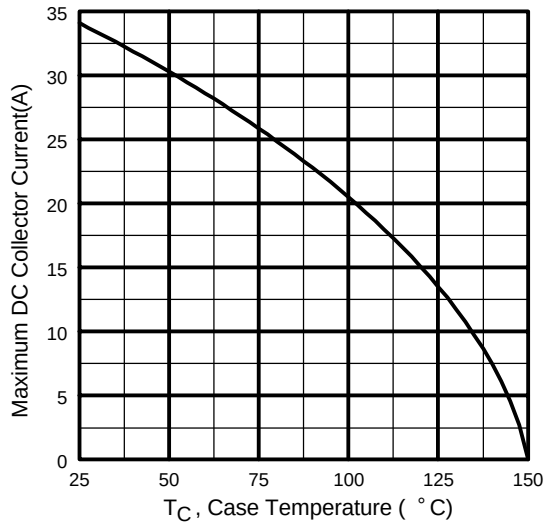


Fig. 4 - Maximum Collector Current vs. Case Temperature

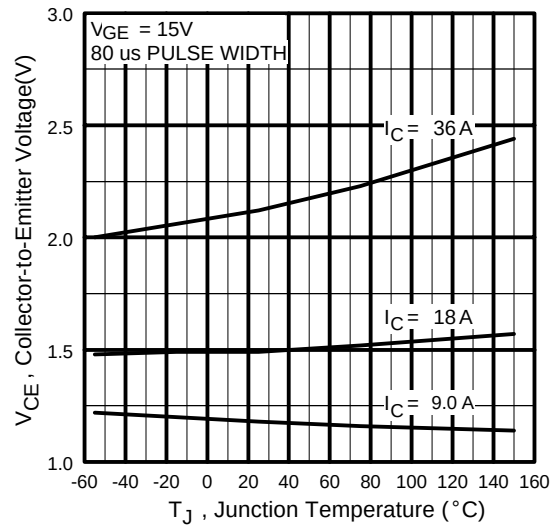


Fig. 5 - Typical Collector-to-Emitter Voltage vs. Junction Temperature

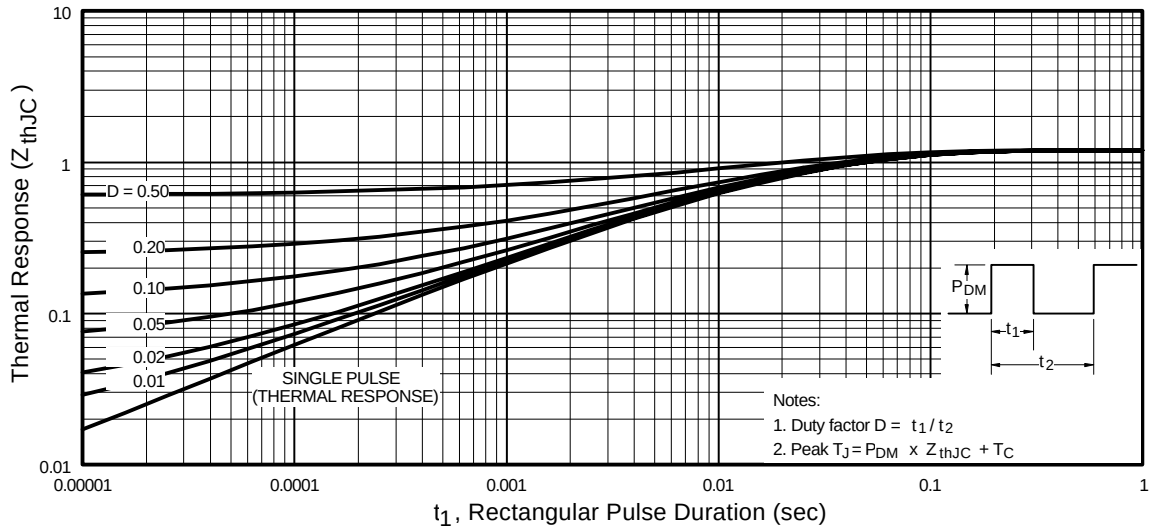


Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

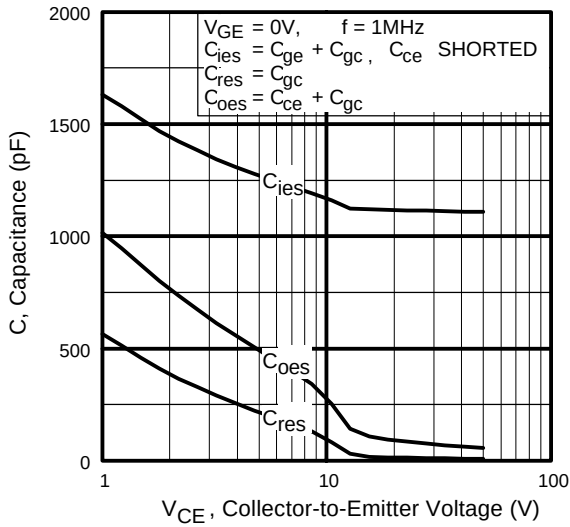


Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

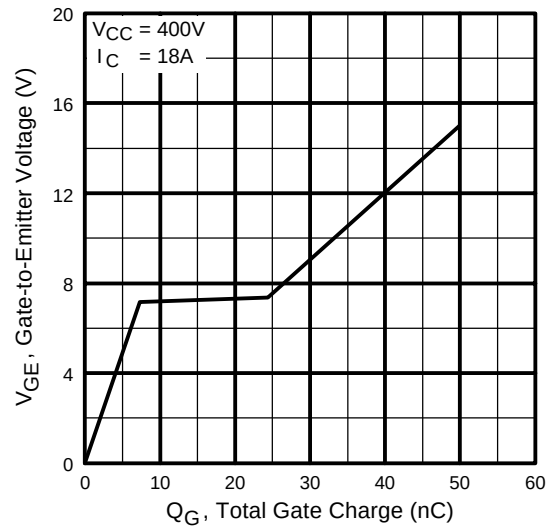


Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

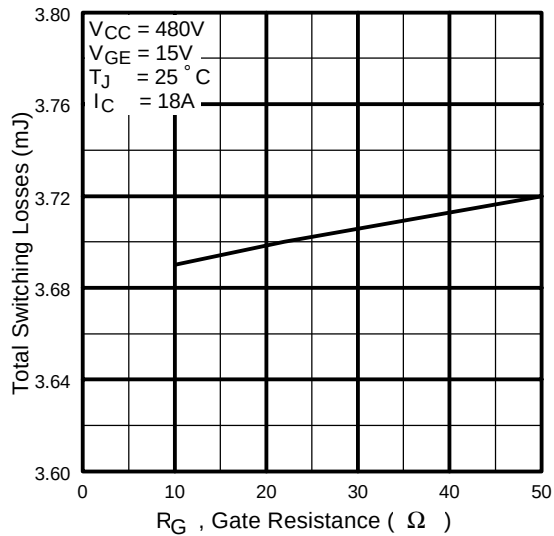


Fig. 9 - Typical Switching Losses vs. Gate Resistance

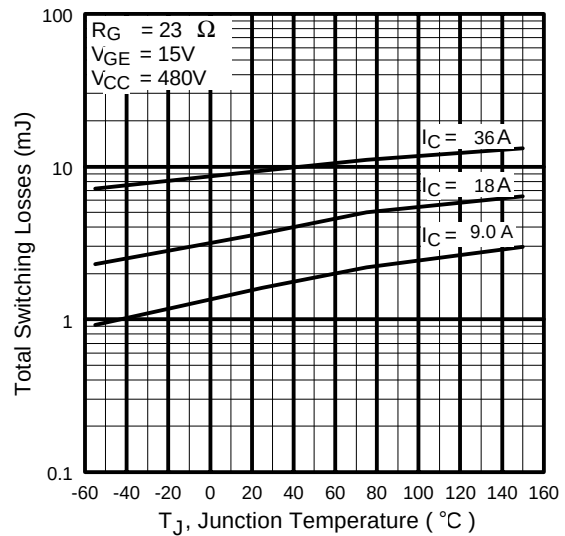


Fig. 10 - Typical Switching Losses vs. Junction Temperature

IRG4PC30S

International
IR Rectifier

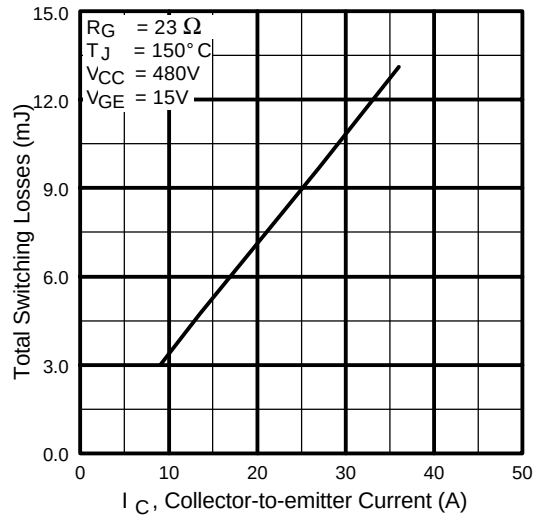


Fig. 11 - Typical Switching Losses vs. Collector-to-Emitter Current

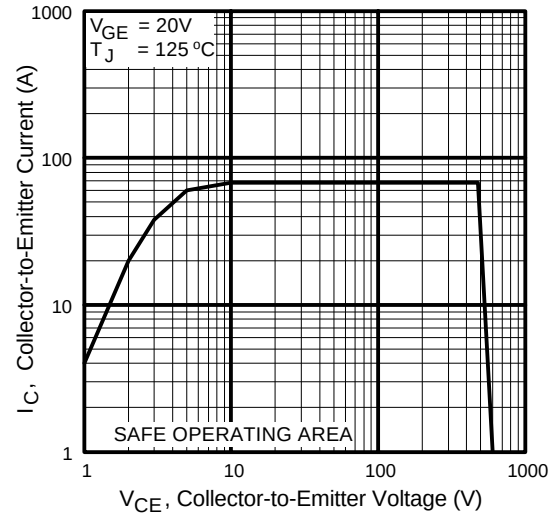


Fig. 12 - Turn-Off SOA

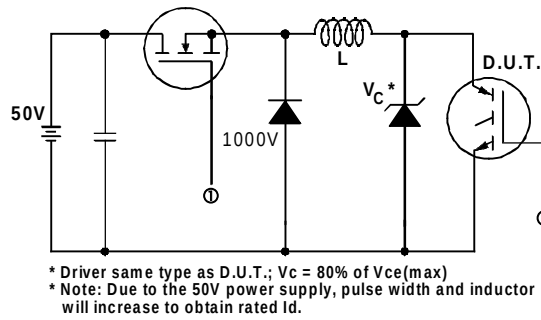


Fig. 13a - Clamped Inductive Load Test Circuit

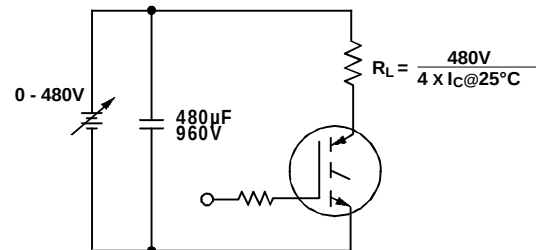


Fig. 13b - Pulsed Collector Current Test Circuit

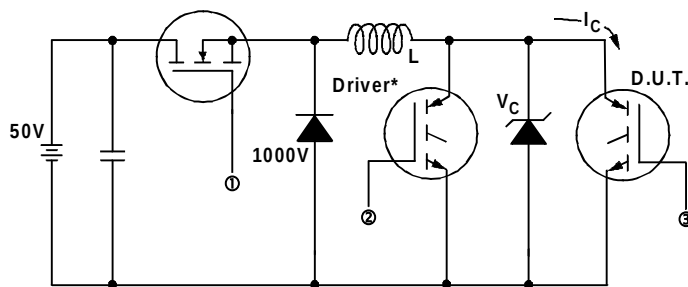


Fig. 14a - Switching Loss Test Circuit

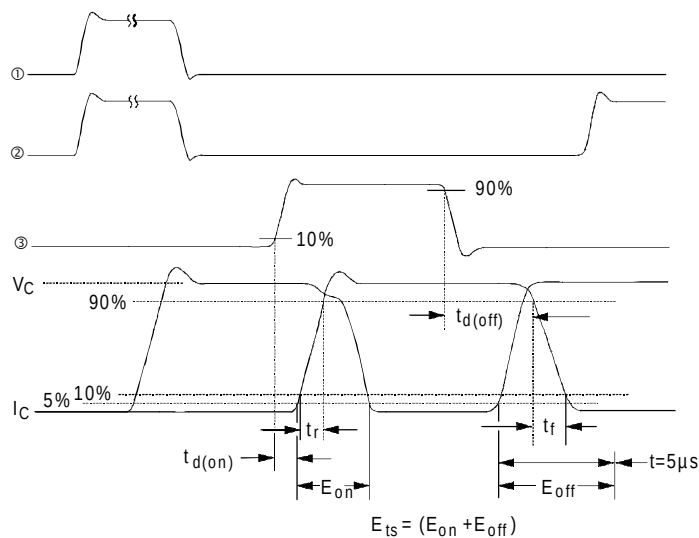


Fig. 14b - Switching Loss Waveforms

International
IOR Rectifier

Technical drawing of a mechanical part showing three views: front, top, and side. Dimensions are given in millimeters (mm) and inches (in).

Front View Dimensions:

- Overall width: 15.90 (.626)
- Overall height: 20.30 (.800)
- Distance from top to first slot: 19.70 (.775)
- Distance from bottom to first slot: 14.80 (.583)
- Distance from bottom to second slot: 14.20 (.559)
- Distance from bottom to third slot: 2.40 (.094)
- Distance from bottom to fourth slot: 2.00 (.079)
- Distance from bottom to fifth slot: 5.45 (.215)
- Distance from bottom to sixth slot: 3.40 (.133)
- Distance from bottom to seventh slot: 3.00 (.118)
- Distance from bottom to eighth slot: 4.30 (.170)
- Distance from bottom to ninth slot: 3.70 (.145)
- Distance from bottom to tenth slot: 1.40 (.056)
- Distance from bottom to eleventh slot: 1.00 (.039)
- Distance from bottom to twelfth slot: 0.25 (.010)
- Distance from bottom to thirteenth slot: 0.25 (.010)
- Distance from bottom to fourteenth slot: 0.25 (.010)
- Distance from bottom to fifteenth slot: 0.25 (.010)
- Distance from bottom to sixteenth slot: 0.25 (.010)
- Distance from bottom to seventeenth slot: 0.25 (.010)
- Distance from bottom to eighteenth slot: 0.25 (.010)
- Distance from bottom to nineteenth slot: 0.25 (.010)
- Distance from bottom to twentieth slot: 0.25 (.010)
- Distance from bottom to twenty-first slot: 0.25 (.010)
- Distance from bottom to twenty-second slot: 0.25 (.010)
- Distance from bottom to twenty-third slot: 0.25 (.010)
- Distance from bottom to twenty-fourth slot: 0.25 (.010)
- Distance from bottom to twenty-fifth slot: 0.25 (.010)
- Distance from bottom to twenty-sixth slot: 0.25 (.010)
- Distance from bottom to twenty-seventh slot: 0.25 (.010)
- Distance from bottom to twenty-eighth slot: 0.25 (.010)
- Distance from bottom to twenty-ninth slot: 0.25 (.010)
- Distance from bottom to thirtieth slot: 0.25 (.010)
- Distance from bottom to thirty-first slot: 0.25 (.010)
- Distance from bottom to thirty-second slot: 0.25 (.010)
- Distance from bottom to thirty-third slot: 0.25 (.010)
- Distance from bottom to thirty-fourth slot: 0.25 (.010)
- Distance from bottom to thirty-fifth slot: 0.25 (.010)
- Distance from bottom to thirty-sixth slot: 0.25 (.010)
- Distance from bottom to thirty-seventh slot: 0.25 (.010)
- Distance from bottom to thirty-eighth slot: 0.25 (.010)
- Distance from bottom to thirty-ninth slot: 0.25 (.010)
- Distance from bottom to fortieth slot: 0.25 (.010)
- Distance from bottom to forty-first slot: 0.25 (.010)
- Distance from bottom to forty-second slot: 0.25 (.010)
- Distance from bottom to forty-third slot: 0.25 (.010)
- Distance from bottom to forty-fourth slot: 0.25 (.010)
- Distance from bottom to forty-fifth slot: 0.25 (.010)
- Distance from bottom to forty-sixth slot: 0.25 (.010)
- Distance from bottom to forty-seventh slot: 0.25 (.010)
- Distance from bottom to forty-eighth slot: 0.25 (.010)
- Distance from bottom to forty-ninth slot: 0.25 (.010)
- Distance from bottom to fiftieth slot: 0.25 (.010)
- Distance from bottom to fifty-first slot: 0.25 (.010)
- Distance from bottom to fifty-second slot: 0.25 (.010)
- Distance from bottom to fifty-third slot: 0.25 (.010)
- Distance from bottom to fifty-fourth slot: 0.25 (.010)
- Distance from bottom to fifty-fifth slot: 0.25 (.010)
- Distance from bottom to fifty-sixth slot: 0.25 (.010)
- Distance from bottom to fifty-seventh slot: 0.25 (.010)
- Distance from bottom to fifty-eighth slot: 0.25 (.010)
- Distance from bottom to fifty-ninth slot: 0.25 (.010)
- Distance from bottom to sixtieth slot: 0.25 (.010)
- Distance from bottom to sixty-first slot: 0.25 (.010)
- Distance from bottom to sixty-second slot: 0.25 (.010)
- Distance from bottom to sixty-third slot: 0.25 (.010)
- Distance from bottom to sixty-fourth slot: 0.25 (.010)
- Distance from bottom to sixty-fifth slot: 0.25 (.010)
- Distance from bottom to sixty-sixth slot: 0.25 (.010)
- Distance from bottom to sixty-seventh slot: 0.25 (.010)
- Distance from bottom to sixty-eighth slot: 0.25 (.010)
- Distance from bottom to sixty-ninth slot: 0.25 (.010)
- Distance from bottom to seventieth slot: 0.25 (.010)
- Distance from bottom to seventy-first slot: 0.25 (.010)
- Distance from bottom to seventy-second slot: 0.25 (.010)
- Distance from bottom to seventy-third slot: 0.25 (.010)
- Distance from bottom to seventy-fourth slot: 0.25 (.010)
- Distance from bottom to seventy-fifth slot: 0.25 (.010)
- Distance from bottom to seventy-sixth slot: 0.25 (.010)
- Distance from bottom to seventy-seventh slot: 0.25 (.010)
- Distance from bottom to seventy-eighth slot: 0.25 (.010)
- Distance from bottom to seventy-ninth slot: 0.25 (.010)
- Distance from bottom to eightieth slot: 0.25 (.010)
- Distance from bottom to eighty-first slot: 0.25 (.010)
- Distance from bottom to eighty-second slot: 0.25 (.010)
- Distance from bottom to eighty-third slot: 0.25 (.010)
- Distance from bottom to eighty-fourth slot: 0.25 (.010)
- Distance from bottom to eighty-fifth slot: 0.25 (.010)
- Distance from bottom to eighty-sixth slot: 0.25 (.010)
- Distance from bottom to eighty-seventh slot: 0.25 (.010)
- Distance from bottom to eighty-eighth slot: 0.25 (.010)
- Distance from bottom to eighty-ninth slot: 0.25 (.010)
- Distance from bottom to ninetieth slot: 0.25 (.010)
- Distance from bottom to one hundred slot: 0.25 (.010)

Top View Dimensions:

- Overall width: 15.90 (.626)
- Overall height: 20.30 (.800)
- Distance from top to first slot: 19.70 (.775)
- Distance from top to second slot: 14.80 (.583)
- Distance from top to third slot: 14.20 (.559)
- Distance from top to fourth slot: 2.40 (.094)
- Distance from top to fifth slot: 2.00 (.079)
- Distance from top to sixth slot: 5.45 (.215)
- Distance from top to seventh slot: 3.40 (.133)
- Distance from top to eighth slot: 3.00 (.118)
- Distance from top to ninth slot: 4.30 (.170)
- Distance from top to tenth slot: 3.70 (.145)
- Distance from top to eleventh slot: 1.40 (.056)
- Distance from top to twelfth slot: 1.00 (.039)
- Distance from top to thirteenth slot: 0.25 (.010)
- Distance from top to fourteenth slot: 0.25 (.010)
- Distance from top to fifteenth slot: 0.25 (.010)
- Distance from top to sixteenth slot: 0.25 (.010)
- Distance from top to seventeenth slot: 0.25 (.010)
- Distance from top to eighteenth slot: 0.25 (.010)
- Distance from top to nineteenth slot: 0.25 (.010)
- Distance from top to twentieth slot: 0.25 (.010)
- Distance from top to twenty-first slot: 0.25 (.010)
- Distance from top to twenty-second slot: 0.25 (.010)
- Distance from top to twenty-third slot: 0.25 (.010)
- Distance from top to twenty-fourth slot: 0.25 (.010)
- Distance from top to twenty-fifth slot: 0.25 (.010)
- Distance from top to twenty-sixth slot: 0.25 (.010)
- Distance from top to twenty-seventh slot: 0.25 (.010)
- Distance from top to twenty-eighth slot: 0.25 (.010)
- Distance from top to twenty-ninth slot: 0.25 (.010)
- Distance from top to thirtieth slot: 0.25 (.010)
- Distance from top to thirty-first slot: 0.25 (.010)
- Distance from top to thirty-second slot: 0.25 (.010)
- Distance from top to thirty-third slot: 0.25 (.010)
- Distance from top to thirty-fourth slot: 0.25 (.010)
- Distance from top to thirty-fifth slot: 0.25 (.010)
- Distance from top to thirty-sixth slot: 0.25 (.010)
- Distance from top to thirty-seventh slot: 0.25 (.010)
- Distance from top to thirty-eighth slot: 0.25 (.010)
- Distance from top to thirty-ninth slot: 0.25 (.010)
- Distance from top to fortieth slot: 0.25 (.010)
- Distance from top to forty-first slot: 0.25 (.010)
- Distance from top to forty-second slot: 0.25 (.010)
- Distance from top to forty-third slot: 0.25 (.010)
- Distance from top to forty-fourth slot: 0.25 (.010)
- Distance from top to forty-fifth slot: 0.25 (.010)
- Distance from top to forty-sixth slot: 0.25 (.010)
- Distance from top to forty-seventh slot: 0.25 (.010)
- Distance from top to forty-eighth slot: 0.25 (.010)
- Distance from top to forty-ninth slot: 0.25 (.010)
- Distance from top to fiftieth slot: 0.25 (.010)
- Distance from top to fifty-first slot: 0.25 (.010)
- Distance from top to fifty-second slot: 0.25 (.010)
- Distance from top to fifty-third slot: 0.25 (.010)
- Distance from top to fifty-fourth slot: 0.25 (.010)
- Distance from top to fifty-fifth slot: 0.25 (.010)
- Distance from top to fifty-sixth slot: 0.25 (.010)
- Distance from top to fifty-seventh slot: 0.25 (.010)
- Distance from top to fifty-eighth slot: 0.25 (.010)
- Distance from top to fifty-ninth slot: 0.25 (.010)
- Distance from top to sixtieth slot: 0.25 (.010)
- Distance from top to sixty-first slot: 0.25 (.010)
- Distance from top to sixty-second slot: 0.25 (.010)
- Distance from top to sixty-third slot: 0.25 (.010)
- Distance from top to sixty-fourth slot: 0.25 (.010)
- Distance from top to sixty-fifth slot: 0.25 (.010)
- Distance from top to sixty-sixth slot: 0.25 (.010)
- Distance from top to sixty-seventh slot: 0.25 (.010)
- Distance from top to sixty-eighth slot: 0.25 (.010)
- Distance from top to sixty-ninth slot: 0.25 (.010)
- Distance from top to seventieth slot: 0.25 (.010)
- Distance from top to seventy-first slot: 0.25 (.010)
- Distance from top to seventy-second slot: 0.25 (.010)
- Distance from top to seventy-third slot: 0.25 (.010)

1 DIMENSIONS & TOLERANCING
PER ANSI Y14.5M, 1982.
2 CONTROLLING DIMENSION : INCH.
3 DIMENSIONS ARE SHOWN
MILLIMETERS (INCHES).
4 CONFORMS TO JEDEC OUTLINE
TO-247AC.

1 - GATE
2 - COLLECTOR
3 - EMITTER
4 - COLLECTOR

Dimensions in Millimeters and (Inches)

International
IOR Rectifier

Data and specifications subject to change without notice. 4/00

Note: For the most current drawings please refer to the IR website at:
<http://www.irf.com/package/>