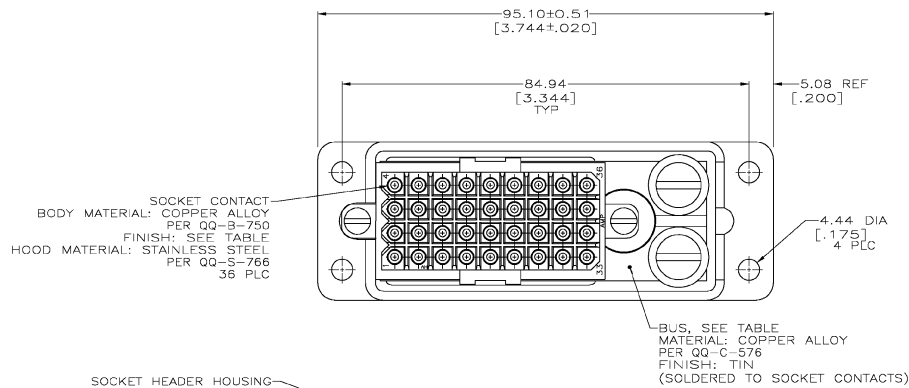


1. MATES WITH RECEPTACLE 207020-1.
TIN OVER NICKEL PER QQ-N-290.
GOLD FLASH PER MIL-G-45204 OVER 1.27µm [.000050] MIN NICKEL
PER QQ-N-290 ON ENTIRE CONTACT, WITH 0.76µm [.000030] MIN
GOLD PER MIL-G-45204 ON ELECTRICAL ENGAGEMENT AREA ONLY.
ALL CIRCUITS COMMONED TO BUS.
CONNECTOR IS DIVIDED LENGTHWISE WITH CIRCUITS 1, 2, 5, 6, 9, 10,
13, 14, 17, 18, 21, 22, 25, 26, 29, 30, 33 AND 34 COMMONED,
AND CIRCUITS 3, 4, 7, 8, 11, 12, 15, 16, 19, 20, 23, 24, 27,
28, 31, 32, 35 AND 36 COMMONED.
WILL ACCEPT RING TONGUE TERMINALS, STUD SIZE 10.
LEAD FREE TIN OVER NICKEL PER QQ-N-290

OBSOLETE	FULL, 36 POSITION	208063-5
	DUAL, 18 POSITION	208063-4
	FULL, 36 POSITION	208063-3
	DUAL, 18 POSITION	208063-2
	FULL, 36 POSITION	208063-1
BUS TYPE		CONTACT FINISH
DATE		PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		
TYPHO ELECTRONICS CORPORATION Harrisburg, Pa		
COMMONING DEVICE ASSEMBLY, 36 POSITION, METRIMATE		
MATERIAL: SEE CALLOUTS		
FINISH: SEE CALLOUTS		
CUSTOMER DRAWING		
SCALE: 2:1		
SHEET 1 OF 1		
REV F		