

max. 33 m³/h

DC axial fans

Series 600 F 60 x 60 x 15 mm





Highlights:

- Compact fan with low power consumption.
- Some models suitable for use at high ambient temperatures.

General characteristics:

- Material: fibreglass-reinforced plastic. Impeller PA, housing PBT.
- Fully integrated electronic commutation.
- Protected against reverse polarity and locking.
- Connection via single strands AWG 28, TR 64. Bared and tin-plated.
- Air exhaust over struts. Direction of rotation counter-clockwise, seen on rotor.
- Mass: 30 g.

Nominal data		Air flow	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sinter sleeve bearings Ball bearings	Power input	Nominal speed	Temperature range	Service life L ₁₀ (20 °C) ebm-papst Standard	Service life L ₁₀ (60 °C) ebm-papst Standard	Life expectancy L ₁₀ Δ (40 °C) see P. 15	Curve	Specials
Type		m ³ /h	CFM	VDC	VDC	dB(A)	Bel(A)	■ / ■	Watts	RPM	°C	Hours	Hours	Hours		P. 110/118
605 F		29	17,1	5	4,5...5,2	27	4,4	■	1,1	4 000	-20...+50	50 000 / 20 000	50 000	50 000	2	/2
612 FL		19	11,2	12	11,5...13,2	16	3,6	■	0,4	2 650	0...+70	50 000 / 20 000	62 500	62 500	1	
612 F		29	17,1	12	10,8...13,2	27	4,4	■	1,0	3 900	-20...+70	50 000 / 20 000	62 500	62 500	2	/2
612 FH		33	19,4	12	10,0...13,2	31	4,8	■	1,4	4 500	-20...+60	45 000 / 15 000	47 500	47 500	3	/2/39
614 F		29	17,1	24	21,6...26,4	27	4,4	■	1,1	3 900	-20...+70	50 000 / 20 000	62 500	62 500	2	/2
Models with temperature range up to +80 / 85 °C.																
612 FL-680		19	11,2	12	11,5...14	16	3,6	■	0,5	2 650	-20...+85	50 000 / 20 000	62 500	62 500	1	
612 F-637		29	17,1	12	10,8...12,6	27	4,4	■	1,0	3 900	-20...+80	50 000 / 20 000	62 500	62 500	2	

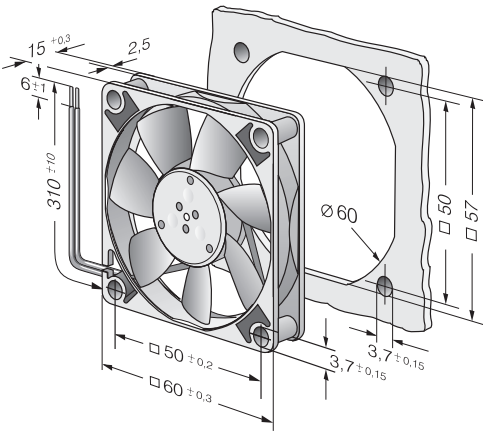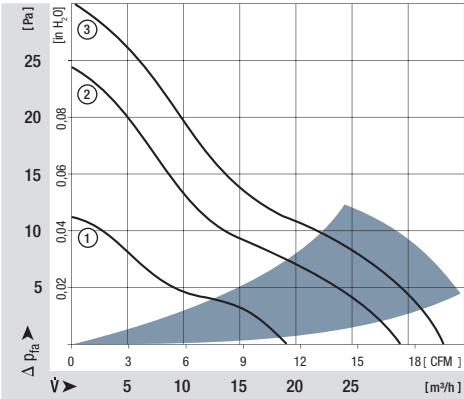

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ebm-papst:](#)

[605F](#)