THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -
© COPYRIGHT - - ALL RIGHTS RESERVED.

LOC	DIST
A1	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N3	NEW VERISON OF GOLD CONTACTS PRERMITTED.	18MAY2011	Kirs	Mair
	N4	OPTIONAL to note 5 TTD added. (area A3)	29JUN2011	Kirs	Mair
	N5	PRODUCT SPEC CORRECTED	23JUN2014	Ho.	Eder
	N6	ECR-15-012070	13AUG2015	JBJH	BK

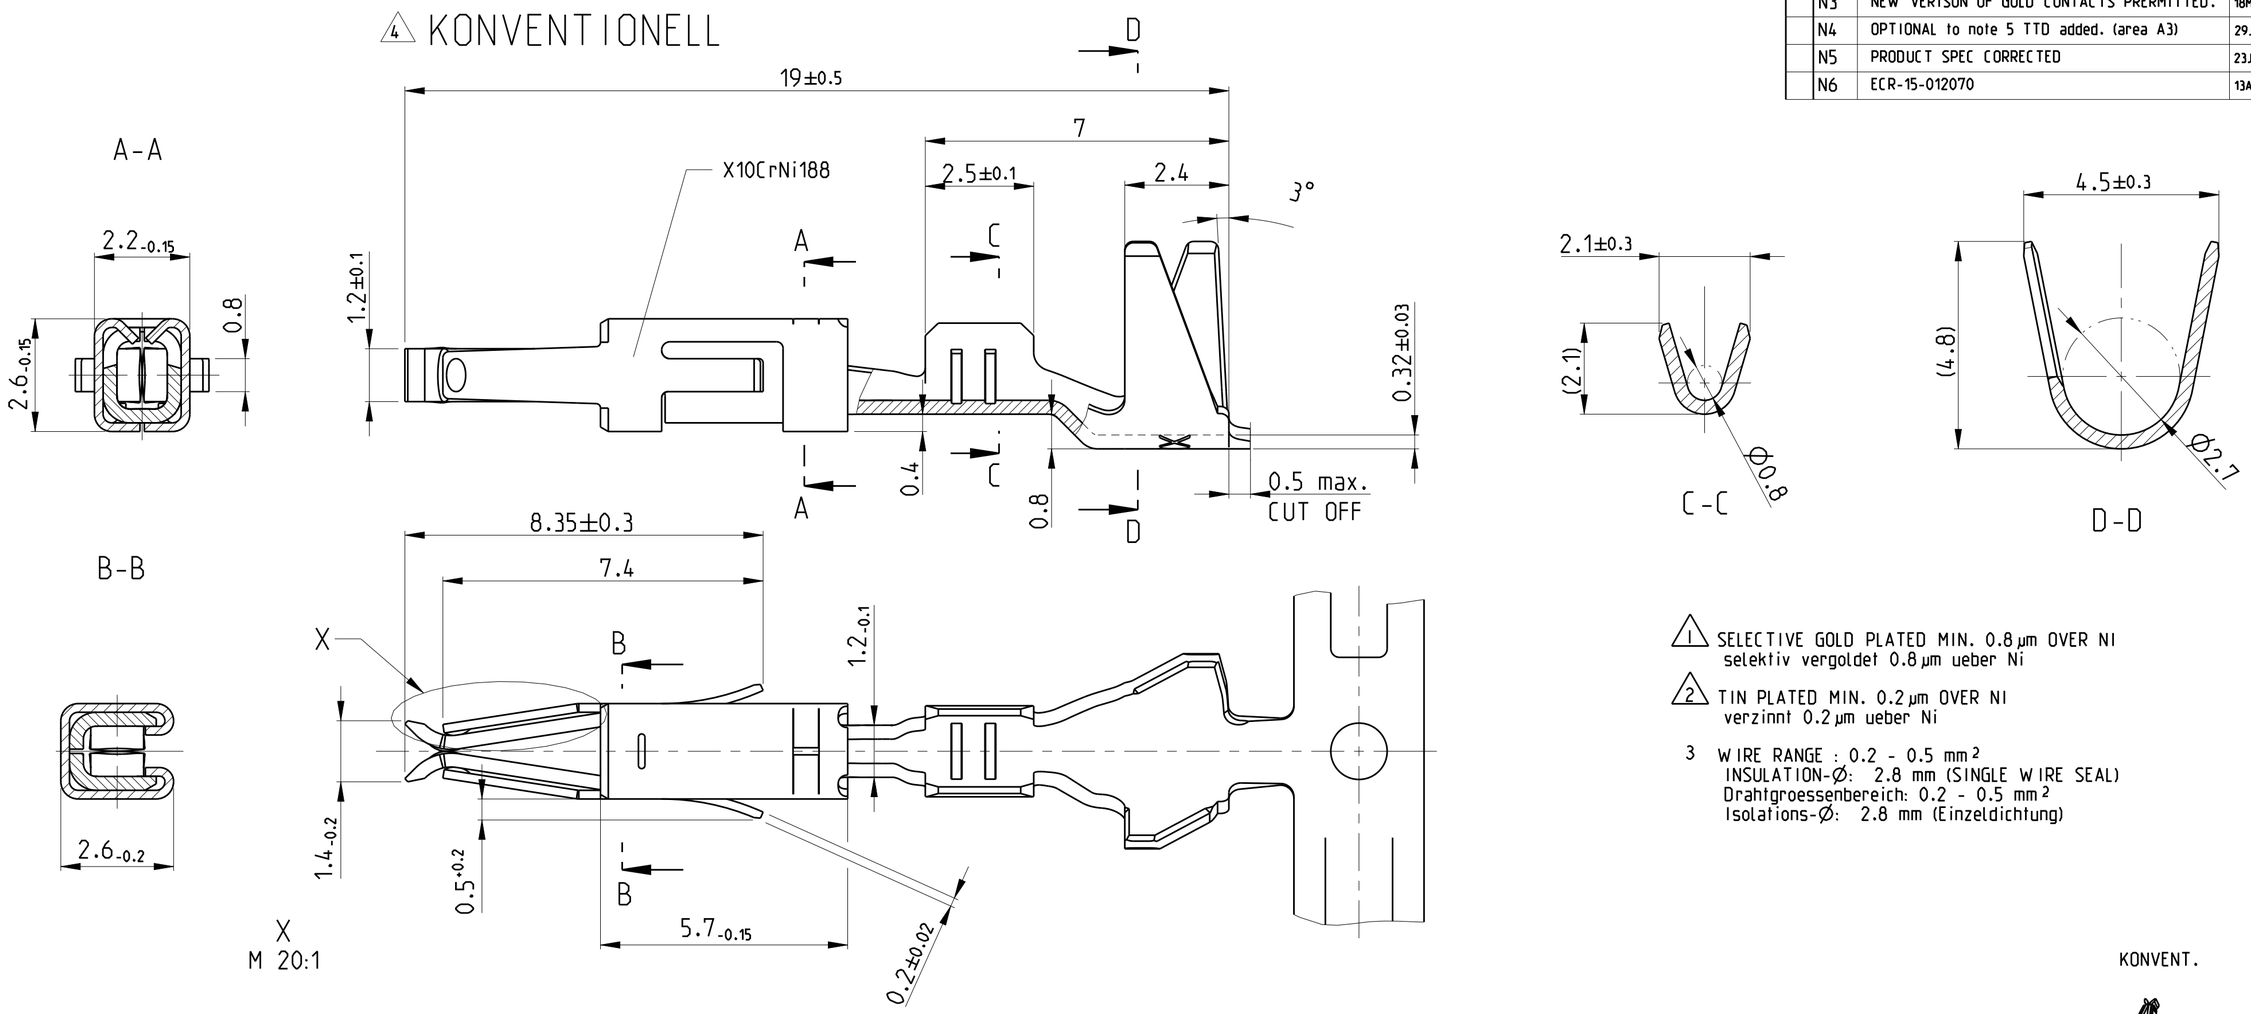

1 SELECTIVE GOLD PLATED MIN. 0.8 µm OVER NI
selektiv vergoldet 0.8 µm ueber Ni

2 TIN PLATED MIN. 0.2 µm OVER NI
verzinnt 0.2 µm ueber Ni

3 WIRE RANGE : 0.2 - 0.5 mm²
INSULATION-Ø: 2.8 mm (SINGLE WIRE SEAL)
Drahtgroessenbereich: 0.2 - 0.5 mm²
Isolations-Ø: 2.8 mm (Einzeldichtung)



VERSION	SURFACE / Oberflaeche	MATERIAL	PART NO	REV
5 4	1 2	CuFe2	962875-5	N
5 4	1 2	CuSn4	962875-3	N
5	PRETIN / vorverzinnt	CuFe2	962875-2	N
5	PRETIN / vorverzinnt	CuSn4	962875-1	N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ± ±0.2
3 PLC ±
4 PLC ±
ANGLES ±2°

MATERIAL -
FINISH -

DWN R.Hofer 05-JAN-89
CHK L. Nix 05-APR-89
APVD M. Bleicher 25-JUN-08
PRODUCT SPEC 108-18055
APPLICATION SPEC 114-18081
WEIGHT 0.3 g

TE Connectivity

NAME
MICRO TIMER 2 CONTACT
WITH DOUBLE LOCKING LANCE
mit doppelter Rastfeder

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-962875	-

Customer Drawing
SCALE 10:1 SHEET 1 OF 1 REV N6