

5.0V HCMOS/TTL COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR

ASL1 Series



RoHS
Compliant



7.0 x 5.08 x 1.4mm

FEATURES:

- HCMOS and TTL compatible.
- Available optional -40°C to 85°C extended temperature.
- Tri-state Enable/Disable function.
- IR reflow capable
- Seam sealed.

APPLICATIONS:

- Provide clock signals for microprocessors, PC mainboards, Graphic cards.
- High output drive capability applications.
- Personal computer, Laptop computer

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	ASL1 Series
Frequency range:	1.000 ~ 125.000 MHz
Operating temperature:	-10° C to + 70° C (See Options)
Storage temperature:	- 55° C to + 125° C
Overall frequency stability:	± 100 ppm max. (see options)
Supply voltage (Vdd):	5.0 V ± 10%
Input current:	See Table 1
Symmetry at 1/2Vdd:	40/60 % max. (see options)
Rise and fall time (Tr/Tf):	See Table 1
Output load:	10TTL or 50 pF (1MHz to 70MHz) 10TTL or 15 pF (70.001MHz to 125MHz)
Output voltage:	VOH = 0.9 * Vdd min. VOL = 0.4 * Vdc max.
Start-up time:	10 ms max.
Tri-state function:	"1" (VIH ≥ 2.2 V) or open: Oscillation "0" (VIL < 0.8 V) : Hi Z
Aging at 25°C/year:	±5ppm max.
Period jitter one sigma:	± 25ps max
Period jitter absolute:	± 100ps max.

Table 1

Freq. (MHz)	Idd max. (mA)	Tr/Tf max. (nSec)
1.0 ~ 34.99	25	10
35.0 ~ 60.0	40	5
60.01~100.0	60	5
100.01 ~ 125	80	2.5

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ASL1 - Frequency - □ - □ - □ - □ - □

Operating Temp.	
I	0°C to +50°C
D	-10°C to +60°C
E	-20°C to +70°C
F	-30°C to +70°C
N	-30°C to +85°C
L	-40°C to +85°C

Overall Frequency	
J*	±20ppm
R	±25ppm
K	±30ppm
H	±35ppm
C	±50ppm

*Temp. option I, D, E, and -10°C to +70°C only

Packaging	
Blank	Bulk
T	Tape and Reel

Output Load	
50	50pF

Symmetry	
S	45/55% @ 1/2Vdd
S1	45/55% @ 1/4Vdd





7.0 x 5.08 x 1.4mm



Technical drawing of a rectangular plate with dimensions and tolerances:

- Top View:** Shows a rectangular plate with a central hole. Dimensions are indicated by arrows:
 - Overall width: $0.275 \pm .008$ (7.0 ± 0.2)
 - Overall height: $0.055 \pm .008 / - .016$ (1.4 ± 0.2 / - 0.4)
- Side View:** Shows the profile of the plate. Dimensions are indicated by arrows:
 - Overall width: $0.2 \pm .008$ (5.08 ± 0.2)
 - Overall height: 0.043 (1.1)
- Bottom View:** Shows the bottom of the plate. Dimensions are indicated by arrows:
 - Overall width: 0.055 (1.4)
 - Overall height: 0.024 (0.6)

Dimensions: inches (mm)


PIN	FUNCTION
1	Tri-state Enable/Disable
2	GND/Case
3	Output
4	Vdd

▶ **TAPE & REEL:**

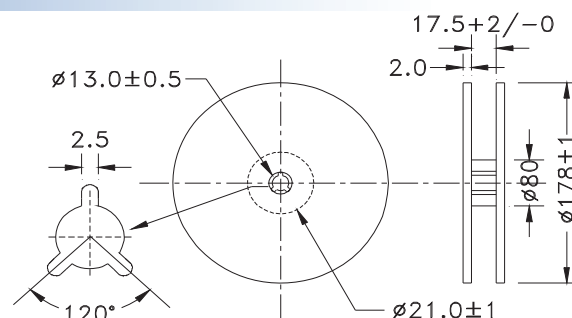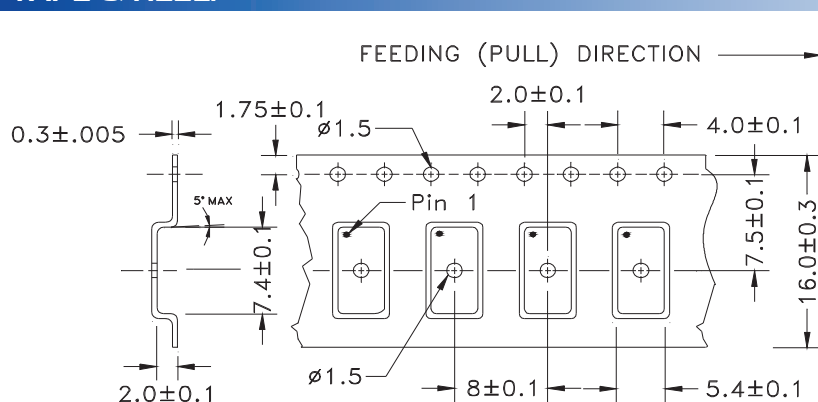

Dimensions: mm

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



ABRACON CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 08.17.08**

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com