



TRIPLETT Carrying Cases



Model 369
Cat. No. 10-1258

Compact case with belt loop.

Accommodates the following Models:
310 Series,
1101, 2202, 3303



Model 369-S
Cat. No. 10-1791

Flap folds back to form stand.

Accommodates the following Models:
310 Series



Model 369-T
Cat. No. 10-1608

Includes Neck Strap for hand-free use.

Accommodates the following Models:
310 Series



Case w/ Belt Loop
Cat. No. 10-2969

Roomier than the Model 369. Also includes a belt loop.

Accommodates the following Models:
310 Series,
1101, 2202, 3303



Model 379
Cat. No. 10-1456

Specially designed to hold all of the components of the Model 100 Series.

Accommodates the following Models:
100 Series



669-OS
Cat. No. 10-1792

Case with snap front and handle.

Accommodates the following Models:
666-R



Model 639-C
Cat. No. 10-4152

Padded, Cordura case with strap. Accommodates the following Models:
60 Series, 630 Series



Model 639-A
Cat. No. 10-2739

"Barn door" opening front with snap back cover and handle. Accommodates the following Models:
60 Series, 630 Series



Model 639
Cat. No. 10-823

Top opening case with handle.

Accommodates the following Models:
60 Series, 630 Series



Model 639-N
Cat. No. 10-1189

"Barn door" opening front with snap back cover and handle.

Accommodates the following Models:
630 Series



Model 639-OS
Cat. No. 10-1793

Front opening case with "hook and loop fastener", handle and stand.

Accommodates the following Models:
630 Series



Econo Case 1
Cat. No. 10-3931

Economical vinyl case with zipper.

Accommodates the following Models:
310 Series,
1101, 2202, 3303,
WireMaster XR, BNC, RJ-45



Econo Case 2
Cat. No. 10-3930

Economical vinyl case with zipper.

Accommodates the following Models:
4404



Vinyl Case (Tall)
Cat. No. 10-2961

Padded, vinyl carrying case with zipper and handle.

Accommodates the following Models:
4404, C45, 9000 Series DMMs,
9000 Series Clamp-Ons, PairMaster



Vinyl Case (Short)
Cat. No. 10-4188

Padded, vinyl carrying case with zipper and loop.

Accommodates the following Models:
4404, C45, 9000 Series DMMs,
9000 Series Clamp-Ons



Model 369-V
Cat. No. 10-2959

Padded, vinyl carrying case with zipper and loop.

Accommodates the following Models:
310 Series,
1101, 2202, 3303



Model 2 Case
Cat. No. 10-3525

Case with snap front and handle.

Accommodates the following Models:
Model 2

TRIPLETT Carrying Cases



Model 7 Case
Cat. No. 10-3712

"Barn door" opening front with snap back cover, handle stand and strap.

Accommodates the following Models:
Model 7 with Accutone or Terminator



4404 Boot
Cat. No. 10-3933

Grey, rubber shock-absorbing boot with built-in stand.

Accommodates the following Models:
4404



2202 / 3303 Boot
Cat. No. 10-4191

Grey, rubber shock-absorbing boot.

Accommodates the following Models:
2202, 3303

9000 Series DMM Boots (Not Pictured)
Cat. No. 10-4183

Red, rubber shock-absorbing boot.
Accommodates the following Models:
9000, 9010, 9020, 9030

Cat. No. 10-4184

Red, rubber shock-absorbing boot with built-in stand.
Accommodates the following Models:
9040

Accutone /Terminator Case (Not Pictured)
Cat. No. 10-3756

Accommodates the following Models: Accutone, Terminator

AC Current Clamp-On Accessories



Fox & Hound Case
Cat # 10-3983

Durable cordura case with belt loop and adjustable pocket.

Accommodates the following Models:
Fox & Hound or Hound 2 Probe, LAN Fox & Hound or Hound 2 Probe,
WireMaster XR, WireMaster BNC, WireMaster RJ-45



Model 101-G
Line Separator

- ▲ For use with Clamp-On Amp Meters
- ▲ Separates the line & neutral conductors of power cords
- ▲ 2 clamp positions: x1 for direct readings and x10 for readings multiplied by 10
- ▲ 15 Amp maximum current
- ▲ Polarized plug
- ▲ Voltage testing function

Cat. No. 3264: Model 101-G

Model 10

- ▲ Connects to your existing Analog VOM (5,000Ω / V, 3V AC Full Scale)
- ▲ Measures up to 300 AC Amps
- ▲ Requires additional 6 foot attachment lead specific to your tester
- ▲ See below chart for tester compatibility

Cat. No. 60-211: Model 10

Model 10-C

- ▲ Connects to your existing Analog VOM (15,000Ω / V, 3V AC Full Scale)
- ▲ Measures up to 300 AC Amps
- ▲ Requires additional 6 foot attachment lead specific to your tester
- ▲ See below chart for tester compatibility

Cat. No. 60-335: Model 10-C

Model 10-N

- ▲ Connects to any DMM with 200mV to 400mV AC Ranges
- ▲ Measures 5 to 400 AC Amps @ 60Hz
- ▲ Includes 6 foot connecting lead
- ▲ See below chart for tester compatibility

Cat. No. 60-573: Model 10-N

Triplet Tester	Clamp-On Adaptor	Connecting Lead
310	Model 10	79-416*
310-C	Model 10-C	79-416*
310-TEL	Model 10	79-416*
60, 60-NA	Model 10	79-417
630 Type 3 & earlier	Model 10	79-415
630 Type 4 & later	Model 10	79-417
630-PL, 630-PLK, 630-NA	Model 10	79-415
630-NS	Model 10-C	79-415
2202, 4404	Model 10-N	None Required
9000, 9010, 9030, 9040	Model 10-N	None Required

*The Model 10 / 10-C connects directly to the 310, 310-C, and 310-TEL; therefore, it does not require the connecting lead. However, the connecting lead will give you added flexibility in your testing.



Temperature Measurement

The Model 986F is shown with the optional 79-761 Thermocouple probe.



Model 986 Thermocouple Adaptor

- ▲ Connects to any DMM with a 200mV to 400mV Range
- ▲ Available in Fahrenheit or Celsius
- ▲ Accepts standard K-Type Thermocouple
- ▲ Thermocouple Probe sold separately

Cat. No. 3258: Model 986F (Fahrenheit)
Cat. No. 3259: Model 986C (Celsius)

72-111

K-type Thermocouple Immersion Probe


for liquids, gels and granular material

Probe: Corrosion-resistant stainless steel, 8 1/4" long

Measurement Range: -40 to 1562° F, -40 to 850° C

Coiled Cord: Extends to 72" for extended reach. Withstands temperatures up to 220°F (105°C)

Handle: Non-flammable, withstands temperatures up to 257°F (125°C)



72-112

K-type Thermocouple Surface Probe


for flat or slightly convex surfaces

Probe: Corrosion-resistant stainless steel, 8 1/4" long

Measurement Range: -40 to 950° F, -40 to 510° C

Coiled Cord: Extends to 72" for extended reach. Withstands temperatures up to 220°F (105°C)

Handle: Non-flammable, withstands temperatures up to 257°F (125°C)



72-113

K-type Thermocouple Air Probe


for measuring air and gases

Probe: Perforated stainless steel baffle, Corrosion-resistant stainless steel, 8 1/4" long

Measurement Range: -40 to 500° F, -40 to 260° C

Coiled Cord: Extends to 72" for extended reach. Withstands temperatures up to 220°F (105°C)

Handle: Non-flammable, withstands temperatures up to 257°F (125°C)




79-761

K-type Thermocouple Bead Probe

general purpose probe, not suitable for liquids

Probe: Bead, 48" long

Measurement Range: -40 to 1562° F, -40 to 850° C



79-310

J-type Thermocouple Bead Probe


72" long probe for use with the G/P Series



TRIPLETT Test Leads


Model 310 Series Test Leads

The Model 310 Series Test Leads all use Mini-Banana Jacks

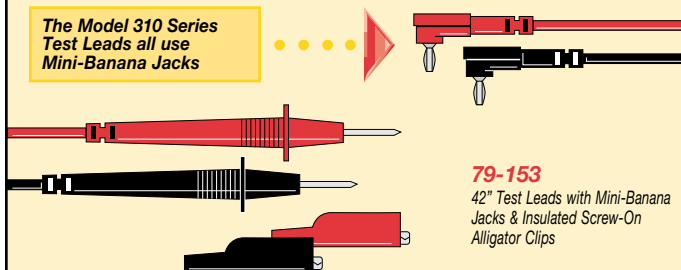


79-153

42" Test Leads with Mini-Banana Jacks & Insulated Screw-On Alligator Clips




79-206

48" Test Leads with Mini-Banana Jacks and Insulated Alligator Clips

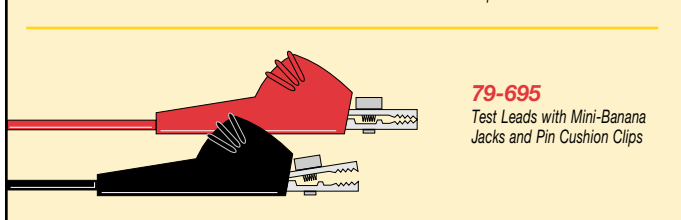

79-695

Test Leads with Mini-Banana Jacks and Pin Cushion Clips

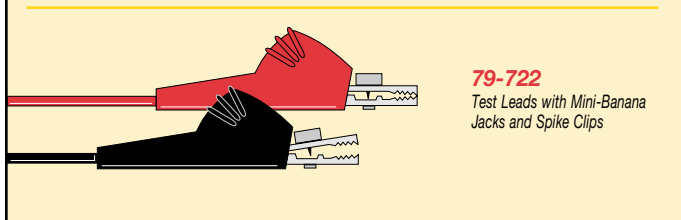


79-722

Test Leads with Mini-Banana Jacks and Spike Clips

Model 60 Series, 630 Series, 666-R, & G/P Series Test Leads

79-127


48" Test Leads with Insulated Screw-On Alligator Clips

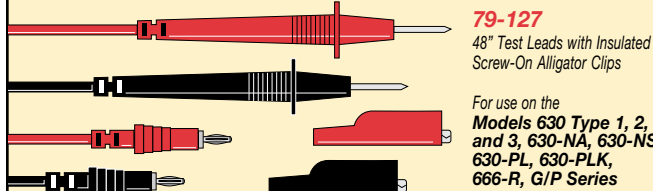

For use on the Models 630 Type 1, 2, and 3, 630-NA, 630-NS, 630-PL, 630-PLK, 666-R, G/P Series

79-373


48" Test Leads with Miniature Clips (female jack)

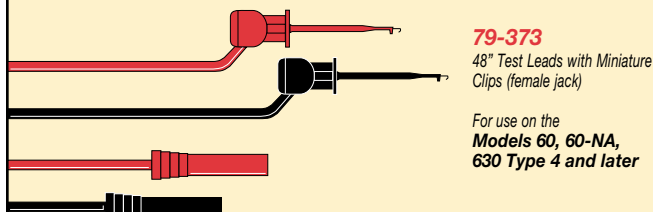

For use on the Models 60, 60-NA, 630 Type 4 and later

79-374


48" Test Leads with Insulated Screw-On Alligator Clips. (female jack)

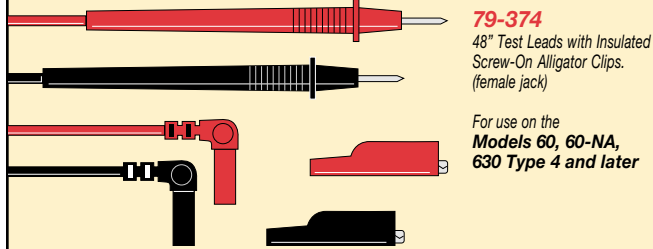

For use on the Models 60, 60-NA, 630 Type 4 and later




Digital Multimeter Test Leads

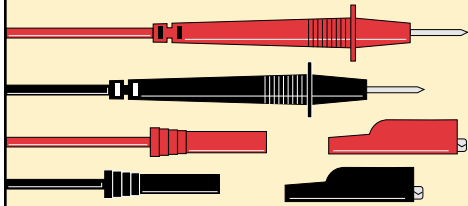


79-513
48" Test Leads with Shrouded Jacks & Insulated Screw-On Alligator Clips.

For use on the
**Models 4404, 1101
and C45 Type 2**

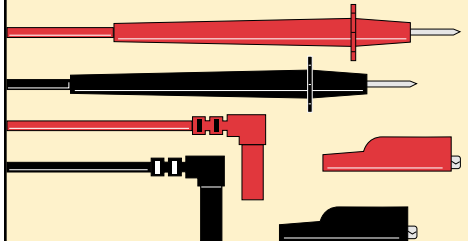


79-760
48" Test Lead with Insulated Screw-On Alligator Clips

For use on the
**Models 9000, 9010,
9020, 9030, 9040,
4404, 1101, 9300,
9310, 9320 and
C45 Type 2**

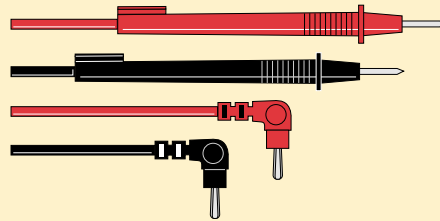

79-723
36" Test Leads with Probe Tips


For use on the
**Models 5505,
3303 and 2202**

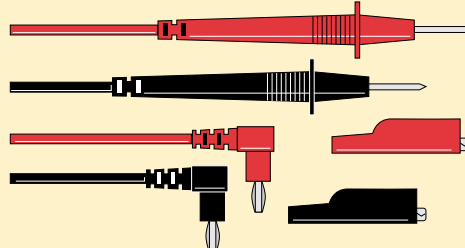

79-728
42" Test Leads with Banana Jacks & Insulated Screw-On Alligator Clips.


For use on the
**Models 5505,
3303 and 2202**

Model 7 Test Leads

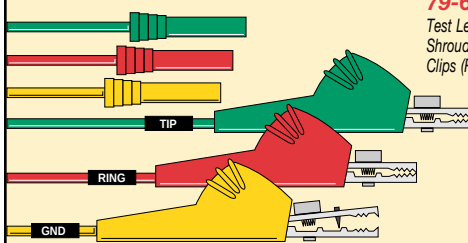


79-683
Test Lead Assembly with Shrouded Jacks and Pin Cushion Clips (Red, Yellow & Green)

Model 8455 Test Leads



79-619
72" Lead with Test Clip (Black)



79-662
72" Test Lead with Spike / Pin Cushion Clip (Black)



79-668
72" Test Lead with Spike / Pin Cushion Clip (Red)

Mini-Fault Locator / BQ Series




79-721
14" Male-to-Female Leads.
For use on the
Mini-Fault Locator



79-727
Lead & Negative Terminal.
For use on the
BQ-Series

Model 10 Series Attachment Leads

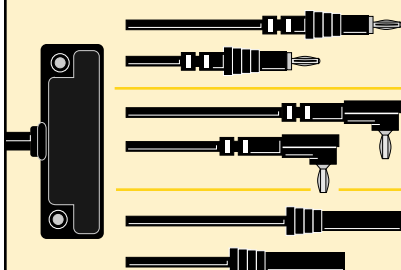


79-415
6" Attachment Lead
630 Type 1, 2 & 3, 630-NA,
630-PL, 630-PLK to Model 10
630-NS to Model 10-C

79-416
42" Separating Lead
310 Series to Model 10 Series

79-417
6" Attachment Lead
60/ 60-NA to Model 10
630 Type 4 & later to Model 10

Models 2, 4 & 5 Test Leads

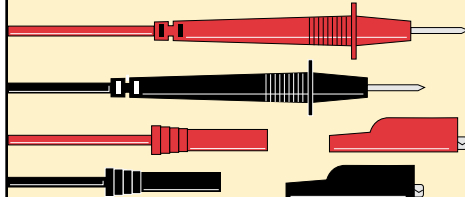


79-513
48" Test Leads with Shrouded Jacks & Insulated Screw-On Alligator Clips.

For use on the
Models 2, 4 and 5



79-519
Lead Assembly, W E 310
Plug to Modular Plug.


For use on the
Models 4 and 5

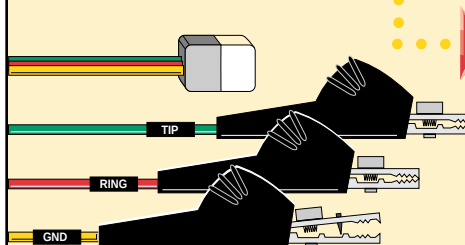

79-493
Combination of the
79-519 and 79-537

79-537
Test Lead Assembly with
Modular Jack and
Pin Cushion Clips.

For use on the
Models 2, 4 and 5

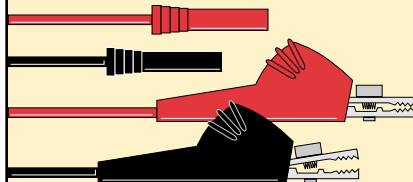


79-548
Test Leads with Shrouded Jacks and Pin Cushion Clips

For use on the
Models 4 and 5



79-635
Lead Assembly, Modular
Plug to Modular Plug.

For use on the
Model 2

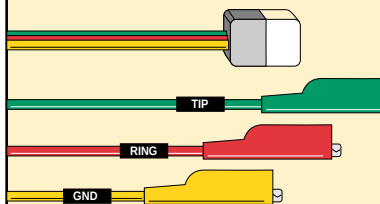

79-636
Test Lead Assembly with
Modular Jack and Alligator
Clips (Red, Yellow & Green).

For use on the
Model 2

TRIPLETT Accessory Listing by Model

Digital Testers

VisualEYEzer

Carrying Cases

10-4176 VisualEYEzer Carrying Case

Batteries, Fuses, and Manuals

37-66 C-cell Alkaline Battery (4 required)
3207-123 Fuse, 1Amp / 600 Volts Test Lead (2 required)
84-796 User's Manual

Test Leads and other Accessories

26-919 Headset-to-Beltpack Cable
79-770 Test Lead Replacement Tip (Yellow)
206-82 Industrial Eyepiece Assembly, Indoor
206-83 Industrial Eyepiece Assembly, Outdoor
206-88 Industrial Mirror, Indoor
206-89 Industrial Mirror, Outdoor
3206-88 Headset Band
3206-89 1" Wide Web Belt (28" to 48" Waist)
13719 AC Power Pack

Models 9000, 9010, 9020, 9030 Accessories

Carrying Cases

10-4183 Red Rubber Boot
10-2961 Vinyl, Zippered Carrying Case, Tall
10-4188 Vinyl, Zippered Carrying Case, Short

Batteries, Fuses, and Manuals

37-48 9 Volt Alkaline Battery (Models 9000, 9030)
37-65 AAA - 1.5 Volt (2 required) (Models 9010, 9020)
3207-121 Fuse, 2A / 250V (Models 9000, 9030)
3207-122 Fuse, 0.8A / 250V (Models 9010, 9020)
3207-21 Fuse, 10A / 250V
84-786 User's Manual, 9000
84-787 User's Manual, 9010
84-788 User's Manual, 9020
84-789 User's Manual, 9030

Test Leads

79-760 48" Test Leads w/ screw-on alligator clips

AC Amps Clamp-On

60-573 Model 10-N, AC Clamp-on Adaptor
3264 Model 101-G Line Separator

Temperature Measurement

NOTE: The Model 9000 has a built-in Thermocouple Adaptor
3258 Model 986F, K-type, Thermocouple Adaptor
3259 Model 986C, K-type, Thermocouple Adaptor
72-111 Thermocouple Probe, K-type, Immersion
72-112 Thermocouple Probe, K-type, Surface
72-113 Thermocouple Probe, K-type, Air
79-761 Thermocouple Probe, K-type, Bead

Model 9040 Accessories

Carrying Cases

10-4184 Red Rubber Boot
10-2961 Vinyl, Zippered Carrying Case, Tall
10-4188 Vinyl, Zippered Carrying Case, Short

Batteries, Fuses, and Manuals

37-48 9 Volt Alkaline Battery
3207-123 Fuse, 1A / 600V BBS-1
3207-124 Fuse, 15A / 600V KTK-15
84-784 User's Manual 9040

Test Leads

79-760 48" Test Leads w/ screw-on alligator clips

AC Amps Clamp-On

60-573 Model 10-N, AC Clamp-on Adaptor
3264 Model 101-G Line Separator

Temperature Measurement

3258 Model 986F, K-type, Thermocouple Adaptor
3259 Model 986C, K-type, Thermocouple Adaptor
72-111 Thermocouple Probe, K-type, Immersion
72-112 Thermocouple Probe, K-type, Surface
72-113 Thermocouple Probe, K-type, Air
79-761 Thermocouple Probe, K-type, Bead

Model 4404 Accessories

Carrying Cases

10-2961 Vinyl, Zippered Carrying Case, Tall
10-3930 Econo Carrying Case 2
10-3933 Grey Rubber Boot with Stand
10-4188 Vinyl, Zippered Carrying Case, Short

Batteries, Fuses, and Manuals

37-39 AA - 1.5 Volt Battery (2 required)
3207-91 Fuse, 0.5 Amp/250 Volt
3207-110 Fuse, 20 Amp
84-717 User's Manual, 4404

Test Leads

79-513 Test Leads w/ screw-on alligator clips (straight)
79-760 48" Test Leads w/ screw-on alligator clips (right angle)

AC Amps Clamp-On

60-573 Model 10-N, AC Clamp-on Adaptor
3264 Model 101-G Line Separator

Temperature Measurement

3258 Model 986F, K-type, Thermocouple Adaptor
3259 Model 986C, K-type, Thermocouple Adaptor
72-111 Thermocouple Probe, K-type, Immersion
72-112 Thermocouple Probe, K-type, Surface
72-113 Thermocouple Probe, K-type, Air
79-761 Thermocouple Probe, K-type, Bead

Models 3303 & 2202 Accessories

Carrying Cases

10-4191 Grey Rubber Boot
10-1258 369 Carrying Case
10-2959 369-V Vinyl Carrying Case
10-2969 Carrying Case with Belt Loop
10-3931 Econo Carrying Case 1

Batteries, Fuses, and Manuals

37-39 AA - 1.5 Volt Battery (2 required) (3303 Only)
37-48 9 Volt Alkaline Battery (2202 Only)
3207-91 Fuse, 0.5 Amp/250 Volt
84-791 User's Manual 2202
84-716 User's Manual 3303

Test Leads

79-723 Test Leads (Probe Tip Only)
79-728 Test Leads (Insulated Screw-on Alligator Clip)

AC Amps Clamp-On

60-573 Model 10-N, AC Clamp-on Adaptor
3264 Model 101-G Line Separator

Temperature Measurement

3258 Model 986F, K-type, Thermocouple Adaptor
3259 Model 986C, K-type, Thermocouple Adaptor
72-111 Thermocouple Probe, K-type, Immersion
72-112 Thermocouple Probe, K-type, Surface
72-113 Thermocouple Probe, K-type, Air
79-761 Thermocouple Probe, K-type, Bead

Model 1101 Accessories

Carrying Cases

10-1258 369 Carrying Case
10-2959 369-V Vinyl Carrying Case
10-2969 Carrying Case with Belt Loop
10-3931 Econo Carrying Case 1

Batteries, Fuses, and Manuals

37-48 9 Volt Alkaline Battery
3207-91 Fuse, 0.5 Amp/250 Volt
84-715 User's Manual 1101

Test Leads

79-513 Test Leads w/ screw-on alligator clips (straight)
79-760 48" Test Leads w/ screw-on alligator clips (right angle)

Temperature Measurement

3258 Model 986F, K-type, Thermocouple Adaptor
3259 Model 986C, K-type, Thermocouple Adaptor
72-111 Thermocouple Probe, K-type, Immersion
72-112 Thermocouple Probe, K-type, Surface
72-113 Thermocouple Probe, K-type, Air
79-761 Thermocouple Probe, K-type, Bead

2030-A Accessories

Batteries and Manuals

37-51 1.5 Volt Button Battery (2 required)
84-792 User's Manual, 2030-A

Digital Clamp-Ons

Models 9300, 9310, 9320 Accessories

Carrying Cases

10-2961 Vinyl, Zippered Carrying Case, Tall
10-4188 Vinyl, Zippered Carrying Case, Short (supplied)

Batteries and Manuals

37-48 9 Volt Alkaline Battery
84-782 User's Manual, 9300
84-783 User's Manual, 9310
84-784 User's Manual, 9320

Test Leads

79-760 48" Test Leads w/ screw-on alligator clips

AC Amps Clamp-On

3264 Model 101-G Line Separator

Model C45 Type 2 Accessories

Carrying Cases

10-2961 Vinyl, Zippered Carrying Case, Tall
10-4188 Vinyl, Zippered Carrying Case, Short

Batteries and Manual

37-48 9 Volt Alkaline Battery
84-795 User's Manual, C45 Type 2

Test Leads

79-513 Test Leads w/ screw-on alligator clips (straight)
79-760 48" Test Leads w/ screw-on alligator clips (right angle)

Specialty Testers

Sniff-It, Model 9600 Accessories

Batteries and Manual

37-51 1.5 Volt Button Battery (2 required)
161-438 Instruction Card, Sniff-It

Model 5505 Accessories

Carrying Cases

10-1258 369 Carrying Case - Trouser Belt Pouch
10-2959 369-V Carrying Case - padded black vinyl pouch
10-2969 Carrying Case with Belt Loop
10-3931 Econo Carrying Case 1

Batteries, Fuses, and Manuals

37-48 9 Volt Alkaline Battery
3207-91 Fuse, 0.5 Amp/250 Volt
84-793 User's Manual, 5505

Test Leads

79-728 42" Test Leads with Insulated Screw-on Alligator Clips
79-742 Glass Capacitance Probe (used with Model 5505 for proper placement of cellular antennas)

BQ Series Accessories

79-727 Test Lead Kit (Test lead and Negative terminal)
84-623 User's Manual, BQ-600A
84-762 User's Manual, BQ-200A Plus

TRIPLETT Accessory Listing by Model

Analog Testers

Model 310 Series & Model 100 Series

Carrying Cases

10-1258	369 Carrying Case - Trouser Belt Pouch for 310 Series
10-1456	379 Carrying Case - Designed for the Model 100 Series
10-1608	369-T Carrying Case with Neck Strap for hand-free use
10-1791	369-S Carrying Case - Flap folds back to form stand
10-2959	369V Carrying Case - padded black vinyl pouch
10-2969	Carrying Case with Belt Loop

Batteries, Fuses, and Manuals

37-21	N-cell, 1.5 Volt Battery
37-22	15 Volt Battery
	(310 & 310-C Type 5 & earlier, 310-TEL Type 1)
37-60	12 Volt Battery
	(310 & 310-C Type 6 & 7, 310-TEL Type 2)
3207-37	Fuse, 1/16 A (310 & 310-C Type 6 & earlier, 310-TEL Type 1)
3207-112	Fuse, 1/16 A (310 & 310-C Type 7, 310-TEL Type 2)
84-731	User's Manual, 310, 310-C
84-768	User's Manual, 310-TEL

Test Leads

79-153	42" Test Leads w/ Screw-on Alligator Clips
79-206	Test Leads with alligator clips only (no probes)
79-695	Test Lead with pin cushion clip
79-722	Test Lead with spike clip

AC Amps Clamp-On

3264	Model 101-G Line Separator
60-211	Model 10 Clamp-On (310, 310-TEL & 100)
60-335	Model 10-C Clamp-On (310-C & 100-C)
79-416	42" Separating Leads (310 Series to Model 10 Series)

Model 60 Series Accessories

Carrying Cases

10-823	639 Carrying Case (Top Opening)
10-2739	639-A Carrying Case (Snap Back Cover)
10-4152	639-C Padded Cordura Carrying Case

Batteries, Fuses, and Manuals

37-19	30 Volt Battery (60-NA, 60-D)
37-48	9 Volt Alkaline Battery (60 Only)
37-24	D-cell, 1.5V Alkaline Battery
3207-45	Fuse, 1/8 Amp / 250 Volt (60, 60-NA)
3207-58	Fuse, 1 Amp / 250 Volt (60, 60-NA)
3207-60	Fuse, 2 Amp / 1000 Volt (60, 60-NA)
3207-75	Fuse, 0.5 Amp / 250 Volt (60-D Only)
84-733	User's Manual, 60
84-332	User's Manual, 60-NA
84-446	User's Manual, 60-D

Test Leads

79-373	Miniature Clip Leads (female jack)
79-374	48" Test Leads w/ screw-on alligator clips (female jack)

AC Amps Clamp-On

3264	Model 101-G Line Separator (60, 60-NA)
60-211	Model 10 Clamp-On AC AMP Adaptor (60, 60-NA)
79-417	6' Attachment Leads (60/ 60-NA to Model 10)

Model 630 Series Accessories

Carrying Cases

10-823	639 Carrying Case (Top Opening)
10-1189	639-N Carrying Case (Snap Back Cover)
10-1793	639-OS Carrying Case (With Stand)
10-2739	639-A Carrying Case (Snap Back Cover)
10-1398	Lucite Back (Clear)

Batteries, Fuses, and Manuals

37-19	30 Volt Battery
37-24	D-cell, 1.5V Alkaline Battery
3207-15	Fuse, 1 AMP (630 Only)
3207-21	Fuse, 10 AMP (630-PL & 630-PLK Only)
3207-22	Fuse, 3 AMP (630-PLK Only)
3207-61	Fuse, 2 AMP (630 Only)
3207-67	Fuse, 1.25 AMP (630-NA, 630-NS, 630-PL Only)
3207-69	Fuse, 12 AMP (630-NA, 630-NS Only)
84-668	User's Manual, 630
84-698	User's Manual, 630-PL, 630-PLK
84-329	User's Manual, 630-NA
84-333	User's Manual, 630-NS

Test Leads

79-127	48" Safety Leads w/ Screw-on Alligator Clips (630 Type 1, 2, & 3, 630-NA, 630-NS, 630-PL, 630-PLK)
79-373	Miniature Clip Leads (female jack) (630 Type 4 & Later)
79-374	48" Test Leads w/ screw-on alligator clips (female jack) (630 Type 4 & Later)

AC Amps Clamp-On

3264	Model 101-G Line Separator
60-211	Model 10 Clamp-On AC AMP Adaptor (630, 630-NA, 630-PL, 630-PLK)
60-335	Model 10-C Clamp-On AC AMP Adaptor (630-NS Only)
79-415	6' Attachment Lead to Model 10 (630 Type 1, 2 & 3, 630-NA, 630-NS, 630-PL, 630-PLK)
79-417	6' Attachment Lead to Model 10 (630 Type 4 & Later)

Model 666-R Accessories

Carrying Cases

10-1792	669-OS Carrying Case
---------	----------------------

Batteries, Fuses, and Manuals

37-39	AA, 1.5 Volt Alkaline Battery (2 required)
37-66	C-cell, 1.5 Volt Alkaline Battery
84-315	User's Manual, 666-R

Test Leads

79-127	48" Safety Test Leads w/ Screw-on Alligator Clips
--------	---

G/P Accessories

Cases

10-2189	Case With Panel, (1) Black and (3) Red Post
10-2190	Case With Panel, (1) Black and (2) Red Post
10-2191	Case With Panel, (1) Black and (1) Red Post
10-2192	Case With Panel (No Binding Post)

Batteries and Fuses

37-66	C-Cell, 1.5 Volt Alkaline Battery (3560, 3593, 3594)
3207-30	Fuse, 1 Amp / 250 Volt (3541, 3560)
3207-31	Fuse, 2 Amp / 250 Volt (3544)
3207-34	Fuse, 5 Amp / 125 Volt (3545)
3207-35	Fuse, 25 Amp / 32 Volt (3546)
3207-45	Fuse, 1/8 Amp / 250 Volt (3543)

Test Leads

79-127	Test Leads for G/P Series (Except 3593, 3594)
79-310	Thermocouple J-type (3593, 3594)

Telco Testers

Model 4 & 5

Cases

3206-65	Shoulder Strap
---------	----------------

Batteries, Fuses, and Manuals

37-48	9 Volt Alkaline Battery (2 required)
37-50	22.5 Volt Battery (2 required) (Model 4 Only)
37-24	D-cell, 1.5V Alkaline Battery (Model 4 Only)
3207-43	Fuse, 1 Amp / 250 Volt
84-433	User's Manual, Model 4
84-624	User's Manual, Model 5

Test Leads

79-493	Lead Assembly, (79-537 & 79-519 combined)
79-519	Lead Assembly, W E 310 Plug to Modular
79-537	Lead Assembly, Modular to Pin Cushion Clip
79-513	48" Test Leads (Insulated Screw-on Alligator Clip)
79-548	Volt/Ohm Leads with Pin Cushion Clip

Model 2

Carrying Cases

3206-60	Shoulder Strap
10-3525	Model 2 Carrying Case

Batteries, Fuses, and Manuals

37-48	9 Volt Alkaline Battery (2 required)
3207-77	Fuse, 0.315 Amp / 250 Volt
84-494	User's Manual, Model 2

Test Leads

79-537	Lead Assembly, Modular Clip with Pin Cushion Clips
79-513	48" Test Leads (Insulated Screw-on Alligator Clip)
79-635	Lead Assembly, Modular to Modular
79-636	Lead Assembly, Modular to Alligator Clip

Model 7

Carrying Cases

3206-60	Shoulder Strap
10-3712	Carrying Case

Batteries, Fuses, and Manuals

37-48	9 Volt Alkaline Battery
37-24	D-cell, 1.5V Alkaline Battery
3207-91	Fuse, 0.5 Amp / 250V
84-680	User's Manual, Model 7

Test Leads

79-683	48" Lead Assembly with Pin Cushion Clips
--------	--

Model 8455

Carrying Case

10-3499	Carrying Case
---------	---------------

Test Leads

79-619	72" Lead with Test Clip (Black)
79-662	72" Test Lead with Spike / Pin Cushion Clip (Black)
79-668	72" Test Lead with Spike / Pin Cushion Clip (Red)

Model 60-D

See Model 60 Series

Model 310-TEL

See Model 310 Series

Mini-Fault Locator

37-48	9 Volt Alkaline Battery
84-708	User's Manual, Mini-Fault Locator
79-721	Test Leads with Shrouded Jack on each end

Accutone

10-3756	Carrying Case
37-48	9 Volt Alkaline Battery
3207-77	Fuse, 0.315 Amp / 250 Volt
84-627	User's Manual, Accutone
79-692	Lead Assembly

Terminator

10-3756	Carrying Case
84-625	User's Manual, Terminator
2247-102	Tri-Stud Adaptor

LAN Cable Testers

PairMaster

Carrying Cases

10-3959	Hard-Sided Carrying Case w/ strap
10-2961	Zippered Vinyl Carrying Case

Batteries, Cables and Manual

37-48	9 Volt Alkaline Battery
26-889	RJ-45 Patch Cable (Category 5)
2455-781	RJ-45 In-Line Coupler
84-740	User's Manual, PairMaster

Remote Identifiers

3240-1	Remote #1	3240-11	Remote #11
3240-2	Remote #2	3240-12	Remote #12
3240-3	Remote #3	3240-13	Remote #13
3240-4	Remote #4	3240-14	Remote #14
3240-5	Remote #5	3240-15	Remote #15
3240-6	Remote #6	3240-16	Remote #16
3240-7	Remote #7	3240-17	Remotes #1 thru #4
3240-8	Remote #8	3240-18	Remotes #5 thru #8
3240-9	Remote #9	3240-19	Remotes #9 thru #12
3240-10	Remote #10	3240-20	Remotes #13 thru #16

WireMaster BNC, RJ-45, XR, LAN Fox

10-3931	Econo Carrying Case 1
10-3983	Fox & Hound Carrying Case
37-48	9 Volt Alkaline Battery
2451-184	Belt Clip
2455-781	RJ-45 In-line Coupler
84-752	User's Manual, WireMaster BNC
84-749	User's Manual, WireMaster RJ-45
84-758	User's Manual, WireMaster XR
84-745	User's Manual, LAN Fox

Wire Tracers

Fox & Hound Series

10-3983	Fox & Hound Carrying Case
37-48	9 Volt Alkaline Battery
2567-79	Replacement Tip (Hound or Hound 2 Probe)
84-616	User's Manual, Fox
84-617	User's Manual, Hound
84-732	User's Manual, Hound 2 Probe

AC Clamp-On Adaptors

Models 10 & 10-C

84-420	User's Manual, Model 10 / 10-C
79-414	Replacement Bar Lead
79-415	6' Attachment Lead (630 Type 1, 2 & 3, 630-NA, 630-PL, 630-PLK to Model 10) (630-NS to Model 10-C)
79-416	42" Separating Leads (310 Series to Model 10 Series)
79-417	6' Attachment Leads (60/ 60-NA to Model 10) (630 Type 4 & later to Model 10)

Model 10-N

84-398	User's Manual, Model 10-N
--------	---------------------------

Model 101-G

84-785	User's Manual, Model 101-G
--------	----------------------------

Thermocouple Adaptors

Models 986F & 986C

37-48	9 Volt Alkaline Battery
84-780	User's Manual, 986F / 986C
72-111	Thermocouple Probe, K-type, Immersion
72-112	Thermocouple Probe, K-type, Surface
72-113	Thermocouple Probe, K-type, Air
79-761	Thermocouple Probe, K-type, Bead