




Features

- Carbon element
- Ganging up to 8 sections available
- Knurled and flatted shaft styles
- Audio taper option
- Tracking error within 3 dB
- RoHS compliant*

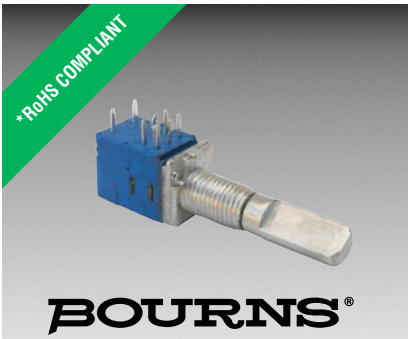

PTR90 Series - 9 mm Multi-Ganged Potentiometer w/Rotary Switch

Electrical Characteristics

Standard Resistance Range 1 K ohms to 1 M ohms
 Total Resistance Tolerance $\pm 10\%$ or $\pm 20\%$
 Standard Tapers Linear & audio
 Maximum Operating Voltage 150 VAC, 20 VDC
 Rated Power
 Linear Taper 0.05 watts
 Audio Taper 0.025 watts
 Noise 100 mV max.
 Insulation Resistance @ 250 VDC 100 M ohms
 Dielectric Withstanding Voltage 300 VAC
 End Resistance 20 ohms max.
 Tracking Error (-40 dB to 0 dB) ± 3 dB

Environmental Characteristics

Operating Temperature -10 °C to +50 °C
 Rotational Life 15,000 cycles
 IP Rating IP 40

Switch Characteristics


Contact Resistance 50 milliohms max.
 Rated Power 3 A @ 16 VDC
 Detent Torque 400 g-cm max.
 Switch Activation Angle 50 ° max.

Mechanical Characteristics


Mechanical Angle 300 ° ± 10 °
 Running Torque 10 to 250 g-cm
 Stop Strength 4.0 kg-cm
 Shaft Push/Pull Strength 5.0 kgf min.
 Shaft Wobble 0.6 x L/20 mm p-p max.
 Mounting Torque 7.0 kg-cm min.
 Soldering Condition
 Manual Soldering
 96.5 Sn/3.0 Ag/0.5 Cu solid wire
 or no-clean rosin cored wire
 270 °C max. for 3 seconds
 Wave Soldering
 96.5 Sn/3.0 Ag/0.5 Cu solder
 with no-clean flux
 260 °C max. for 5 seconds
 Wash Process Not recommended
 Mounting Hardware One flat washer
 and one mounting nut supplied
 per potentiometer

Product Dimensions


PTR901

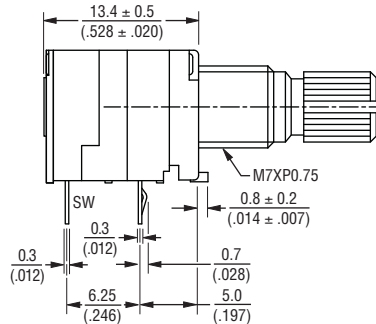

RECOMMENDED PCB LAYOUT




SCHEMATIC




DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$


PTR902

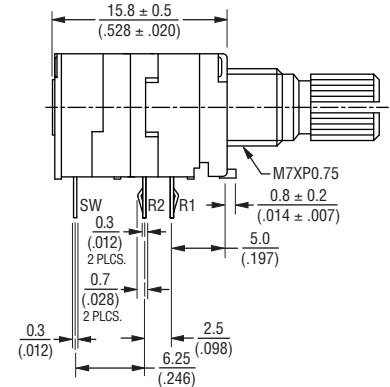


RECOMMENDED PCB LAYOUT



SCHEMATIC



Derating Curve

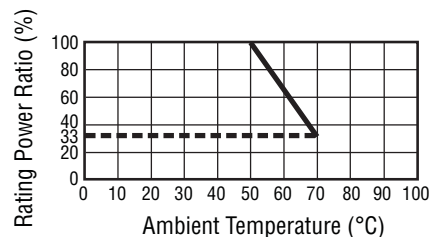

Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.
 Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.

Applications


- Audio/TV sets
- Automotive sound systems
- Amplifiers/mixers/drum machines/synthesizers/DJ equipment
- Multimedia sound systems
- Portable electronics

PTR90 Series - 9 mm Multi-Ganged Potentiometer w/Rotary Switch


BOURNS®

Product Dimensions


PTR904

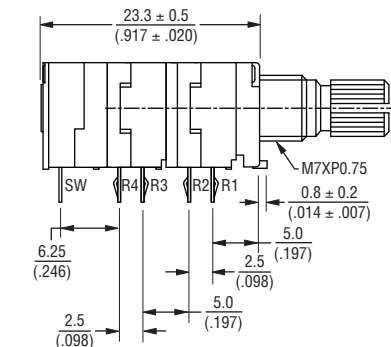

RECOMMENDED PCB LAYOUT

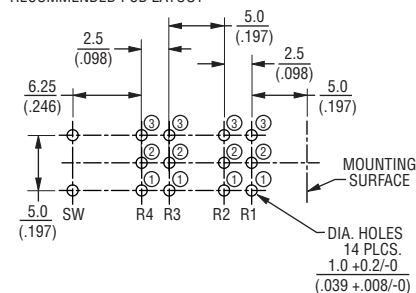


SCHEMATIC




DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$


PTR906

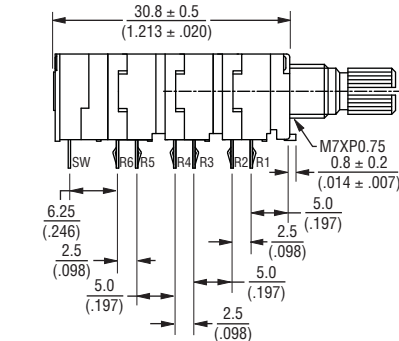


RECOMMENDED PCB LAYOUT

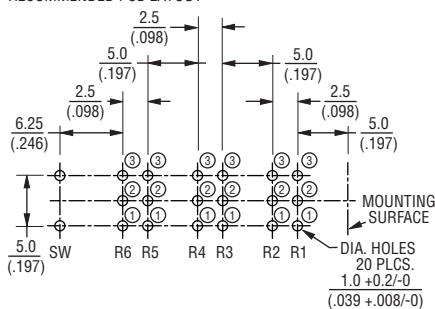


SCHEMATIC

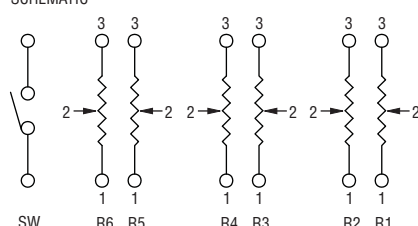


PTR908

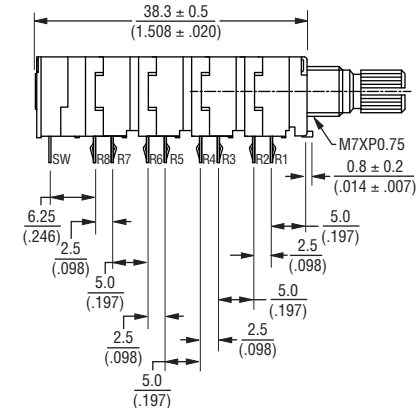

RECOMMENDED PCB LAYOUT

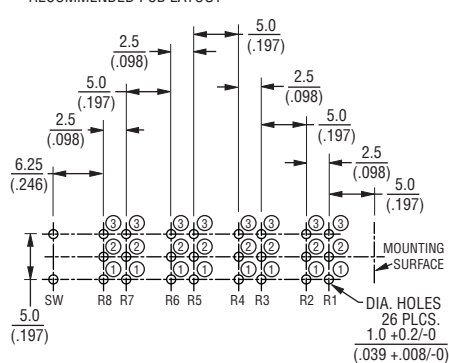

SCHEMATIC

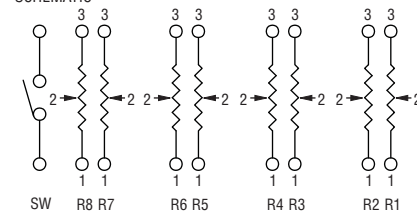

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

PTR90 Series - 9 mm Multi-Ganged Potentiometer w/Rotary Switch

BOURNS®

Product Dimensions

SHAFT STYLE "K"

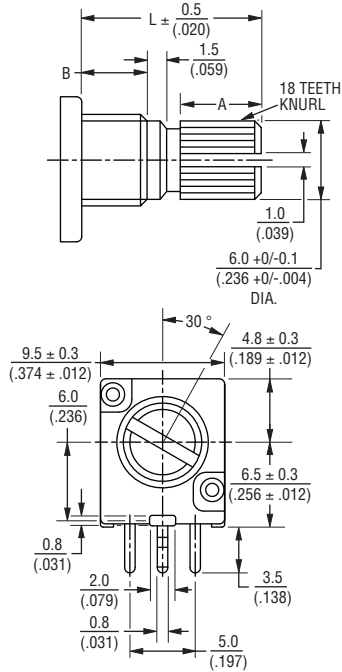


SHAFT SHOWN IN CCW POSITION

L	15 (.591)	20 (.787)	25 (.984)
B	5 (.197)	7 (.276)	10 (.394)
A	6 (.236)	10 (.394)	12 (.472)

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

SHAFT STYLE "F"

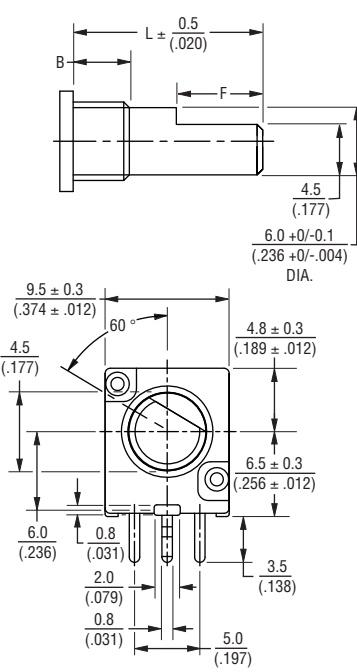

SHAFT SHOWN IN CCW POSITION

L	15 (.591)	20 (.787)	25 (.984)
B	5 (.197)	7 (.276)	10 (.394)
F	7 (.276)	12 (.472)	12 (.472)

How To Order

PTR90 1 - 2 0 20 K - B 203

Model

- PTR90 = With Rotary Switch

No. of Sections

- 1 = 1 Section
- 2 = 2 Sections
- 3 = 3 Sections
- 4 = 4 Sections
- 5 = 5 Sections
- 6 = 6 Sections
- 8 = 8 Sections

Pin Style

- 1 = PC Pins vertical/down facing and $\pm 10\%$ Total Resistance Tolerance
- 2 = PC Pins vertical/down facing and $\pm 20\%$ Total Resistance Tolerance

Center Detent Option

- 0 = No Detent
- 2 = Center Detent

Standard Shaft Length

- 15 = 15 mm
- 20 = 20 mm
- 25 = 25 mm

Shaft Styles

- K = Knurled Type Shaft (Metal) 18 Toothed Serration Type
- F = Flatted Metal Shaft

Resistance Taper (See Taper Charts)


Taper Series followed by Curve Number

Resistance Code (See Table)


Other shaft styles available.

Tapers


A Series Tapers

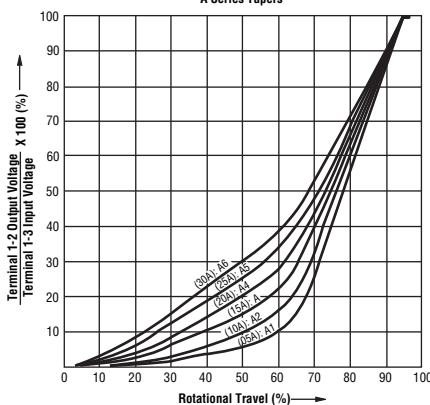

B Series Tapers

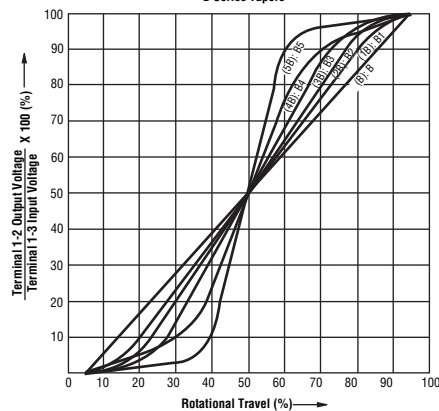

C Series Tapers

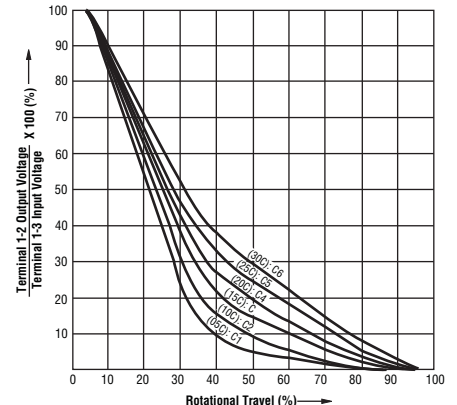

REV. 12/14

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

<u>PTR901-2015K-B203</u>	<u>PTR901-2015K-B502</u>	<u>PTR903-22AAH-A/B</u>	<u>PTR901-2015F-B102</u>	<u>PTR902-2015K-B502</u>
<u>PTR901-2015K-A103</u>	<u>PTR901-2015K-B103</u>	<u>PTR901-2015K-B104</u>	<u>PTR901-2020K-A103</u>	<u>PTR901-2020K-A204</u>
<u>PTR901-20ABF-B503</u>	<u>PTR901-20ACK-A103</u>	<u>PTR902-2015K-A104</u>	<u>PTR902-2020K-A103</u>	<u>PTR902-2020K-A203</u>
<u>PTR902-2020K-A204</u>	<u>PTR902-2025R-B502</u>	<u>PTR902-20AAF-A203</u>	<u>PTR902-1015F-A203</u>	<u>PTR902-2015F-A203</u>
<u>PTR901-1015F-B203</u>	<u>PTR901-2015K-B503</u>	<u>PTR902-1220F-B103</u>	<u>PTR902-2015K-B103</u>	<u>PTR902-2020F-A503</u>
<u>PTR902-2020K-A504</u>	<u>PTR901-2015K-B202</u>	<u>PTR901-2015K-B504</u>	<u>PTR901-2020K-B102</u>	<u>PTR901-2020K-B504</u>
<u>PTR901-2025K-B503</u>	<u>PTR901-2025F-A103</u>	<u>PTR902-2015F-B102</u>	<u>PTR901-2015F-B503</u>	<u>PTR902-2015F-B103</u>
<u>PTR902-2015F-C104</u>	<u>PTR901-2015F-A103</u>	<u>PTR902-2015K-A103</u>	<u>PTR902-1015K-A103</u>	<u>PTR902-1020K-A502</u>
<u>PTR901-2015F-B502</u>				