



GORILLA SLEEVE

- **Innovative Braided Flat Filament Technology**
- **Resists Damage From UV, Gasoline, Engine Chemicals And Salt Water**
- **Heavy Plastic Protection**
- **Smooth Inner Wall Reduces Internal Abrasion**
- **Extreme Cut And Abrasion Resistant**
- **Halogen Free**



Cut Cleanly
Hot Knife

Material

Polyamide Monofilament

Grade

NHN

Flat Filament Thickness

.020"

Drawing Number

TF001NH-WD

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
		Min	Max				
3/8"	NHN0.38BK	1/4"	1/2"	500'	100'	Black (BK)	1.00
1/2"	NHN0.50BK	3/8"	5/8"	500'	100'	Black (BK)	1.40
3/4"	NHN0.75BK	5/8"	1"	250'	50'	Black (BK)	2.10
1"	NHN1.00BK	7/8"	1 1/4"	250'	50'	Black (BK)	2.20
1 1/4"	NHN1.25BK	1"	1 1/2"	250'	50'	Black (BK)	2.50
1 1/2"	NHN1.50BK	1 1/4"	1 3/4"	100'	25'	Black (BK)	3.40
1 3/4"	NHN1.75BK	1 1/2"	2"	100'	25'	Black (BK)	4.00
2"	NHN2.00BK	1 3/4"	2 1/2"	100'	25'	Black (BK)	4.40
3"	NHN3.00BK	2 1/4"	3 1/2"	100'	25'	Black (BK)	6.50

Innovative Flat Filament Braided For High Abrasion Resistance


The latest innovation in Techflex material design is the concept of using different shaped filaments to create strength, stiffness or a variety of other effects.

Gorilla Sleeve is engineered from flat filaments of tough and strong 6-6 Nylon to achieve a thick abrasion guard for use on hoses. This type of sleeve has been tested against competitor's abrasion guards that mix materials in an effort to gain slight abrasion advantages.

Gorilla Sleeve achieves better results without sacrificing great looks or flexibility.

Constant abuse from road hazards, abrasion and vibration make Gorilla Sleaving the choice to protect hoses in over road vehicles.

■ **Colors Available:**
Black (BK)

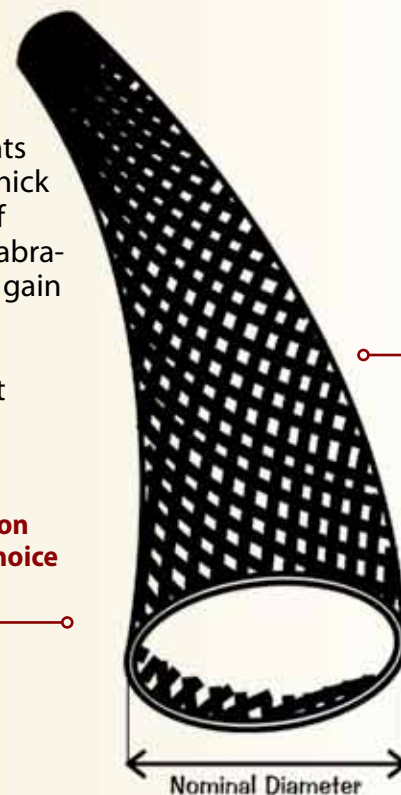

www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871





GORILLA SLEEVE



Abrasion Resistance
Extremely High

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
80°F

Humidity
72%

Minor Scuffing
100 Test Cycles

One Broken Strand
900 Test Cycles

Second Broken Strand
1,200 Test Cycles

One Strand Pulled Out Of
Material
3,500 Test Cycles

Material Destroyed
4,400 Test Cycles

Pre-Test Weight
7,191.6 mg

Post-Test Weight
6,761.4 mg

Test End Loss Of Mass
Point Of Destruction
430.2 mg



Chemical Resistance


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents	1
Aliphatic Solvents	1
Chlorinated Solvents	1
Weak Bases	1
Salts	1
Strong Bases	2
Salt Water 0-S-1926	1
Hydraulic Fluid MIL-H-5606	1
Lube Oil MIL-L-7808	1
De-Icing Fluid MIL-A-8243	1
Strong Acids	5
Strong Oxidants	5
Esters/Keytones	1
UV Light	1
Petroleum	2
Fungus ASTM G-21	2
Halogen Free	Yes
RoHS	Yes

Melt Point
ASTM D-2117
509°F (265°C)

Maximum Continuous
Mil-I-23053
302°F (150°C)

Minimum Continuous
-76°F (-60°C)

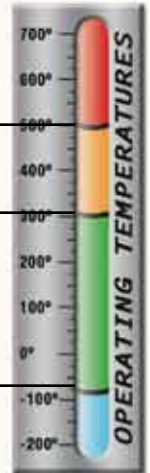

PHYSICAL PROPERTIES

Flat Filament	.020
Flammability Rating	
Recommended Cutting	Hot Knife
Colors	1
Wall Thickness	.05
Tensile Strength (Yarn)	19
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792	1.12
Moisture Absorption	2.5
% ASTM D-570	
Hard Vacuum Data ASTM E-595	
TML	1.10
CVCM	.01
WVR	.69
Smoke D-Max	56
ASTM E-662	
Outgassing	High
Oxygen Index	22
ASTM D-2863	

© 2014 Techflex, Inc. - Any unauthorized reproduction, in whole or part, in any medium whatsoever, without the express written permission of Techflex, Inc. is strictly forbidden.

Techflex product names and logos are registered trademarks of Techflex, Inc., unless otherwise attributed. The contents and illustrations contained herein are believed to be reliable. Techflex makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Techflex's only obligations are those in standard terms of sale for these products and Techflex will not be liable for any consequential or other damages arising due to misuse of these products or typographical errors or omissions. Users should make their own evaluation to determine the suitability of these products for their unique and specific applications.