

## 60CNQ... SERIES

### SCHOTTKY RECTIFIER

60 Amp


#### Major Ratings and Characteristics

| Characteristics                               | 60CNQ...   | Units      |
|-----------------------------------------------|------------|------------|
| $I_{F(AV)}$ Rectangular waveform              | 60         | A          |
| $V_{RRM}$                                     | 35 to 45   | V          |
| $I_{FSM}$ @ $t_p = 5 \mu s$ sine              | 6300       | A          |
| $V_F$ @ 30 Apk, $T_J = 125^\circ C$ (per leg) | 0.44       | V          |
| $T_J$                                         | -55 to 150 | $^\circ C$ |

#### Description/Features

The 60CNQ center tap Schottky rectifier module series has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to  $150^\circ C$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ C$   $T_J$  operation
- Center tap module
- Very low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, small footprint, high current package

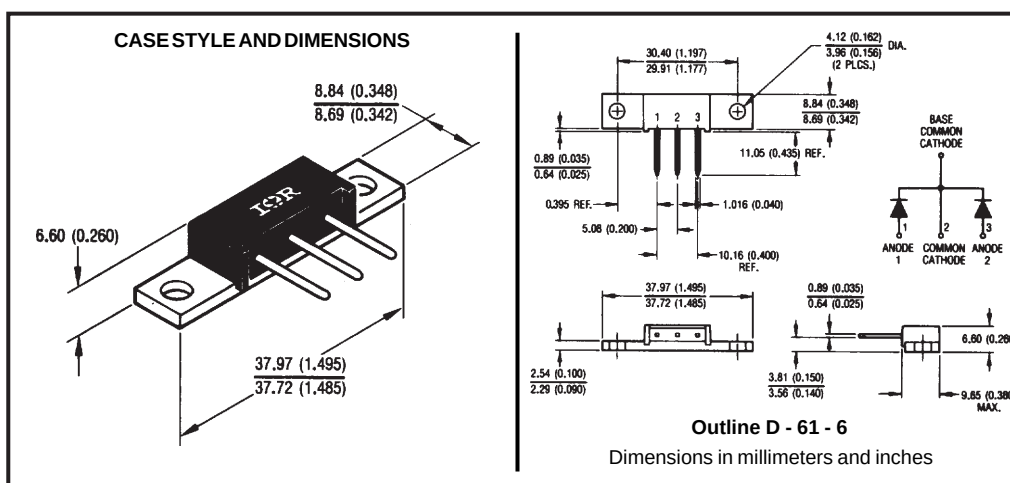

## Voltage Ratings

| Part number                                     | 60CNQ035 | 60CNQ040 | 60CNQ045 |
|-------------------------------------------------|----------|----------|----------|
| $V_R$ Max. DC Reverse Voltage (V)               | 35       | 40       | 45       |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |          |          |          |

## Absolute Maximum Ratings

| Parameters  |                                                                         | 60CNQ | Units | Conditions                                                                                                                 |                                                                     |  |
|-------------|-------------------------------------------------------------------------|-------|-------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--|
| $I_{F(AV)}$ | Max. Average Forward Current<br>* See Fig. 5                            | 60    | A     | 50% duty cycle @ $T_C=116^{\circ}\text{C}$ , rectangular wave form                                                         |                                                                     |  |
| $I_{FSM}$   | Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 6300  | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse                                                                        | Following any rated load condition and with rated $V_{RRM}$ applied |  |
|             |                                                                         | 850   |       | 10ms Sine or 6ms Rect. pulse                                                                                               |                                                                     |  |
| $E_{AS}$    | Non-Repetitive Avalanche Energy (Per Leg)                               | 40    | mJ    | $T_J = 25^{\circ}\text{C}$ , $I_{AS} = 6$ Amps, $L = 2.2$ mH                                                               |                                                                     |  |
| $I_{AR}$    | Repetitive Avalanche Current (Per Leg)                                  | 6     | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ , max. $V_A = 1.5 \times V_D$ typical |                                                                     |  |

## Electrical Specifications

| Parameters      |                                                            | 60CNQ  | Units | Conditions                                                                  |                                       |
|-----------------|------------------------------------------------------------|--------|-------|-----------------------------------------------------------------------------|---------------------------------------|
| V <sub>FM</sub> | Max. Forward Voltage Drop<br>(Per Leg) * See Fig. 1 (1)    | 0.52   | V     | @ 30A                                                                       | T <sub>J</sub> = 25 °C                |
|                 |                                                            | 0.64   | V     | @ 60A                                                                       |                                       |
|                 |                                                            | 0.44   | V     | @ 30A                                                                       | T <sub>J</sub> = 125 °C               |
|                 |                                                            | 0.59   | V     | @ 60A                                                                       |                                       |
| I <sub>RM</sub> | Max. Reverse Leakage Current<br>(Per Leg) * See Fig. 2 (1) | 5      | mA    | T <sub>J</sub> = 25 °C                                                      | V <sub>R</sub> = rated V <sub>R</sub> |
|                 |                                                            | 200    | mA    | T <sub>J</sub> = 125 °C                                                     |                                       |
| C <sub>T</sub>  | Max. Junction Capacitance (Per Leg)                        | 2600   | pF    | V <sub>R</sub> = 5V <sub>DC</sub> , (test signal range 100Khz to 1Mhz) 25°C |                                       |
| L <sub>S</sub>  | Typical Series Inductance (Per Leg)                        | 6.0    | nH    | Measured lead to lead 5mm from package body                                 |                                       |
| dv/dt           | Max. Voltage Rate of Change<br>(Rated V <sub>R</sub> )     | 10,000 | V/ μs |                                                                             |                                       |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

| Parameters        |                                                        |      | 60CNQ      | Units          | Conditions                           |
|-------------------|--------------------------------------------------------|------|------------|----------------|--------------------------------------|
| T <sub>j</sub>    | Max. Junction Temperature Range                        |      | -55 to 150 | °C             |                                      |
| T <sub>stg</sub>  | Max. Storage Temperature Range                         |      | -55 to 150 | °C             |                                      |
| R <sub>thJC</sub> | Max. Thermal Resistance Junction to Case (Per Leg)     |      | 0.85       | °C/W           | DC operation      * See Fig. 4       |
| R <sub>thJC</sub> | Max. Thermal Resistance Junction to Case (Per Package) |      | 0.42       | °C/W           | DC operation                         |
| R <sub>thCS</sub> | Typical Thermal Resistance, Case to Heatsink           |      | 0.30       | °C/W           | Mounting surface, smooth and greased |
| wt                | Approximate Weight                                     |      | 7.8 (0.28) | g (oz.)        |                                      |
| T                 | Mounting Torque                                        | Min. | 40 (35)    | Kg-cm (lbf-in) |                                      |
|                   |                                                        | Max. | 58 (50)    |                |                                      |
| Case Style        |                                                        |      | D - 61 - 6 |                |                                      |

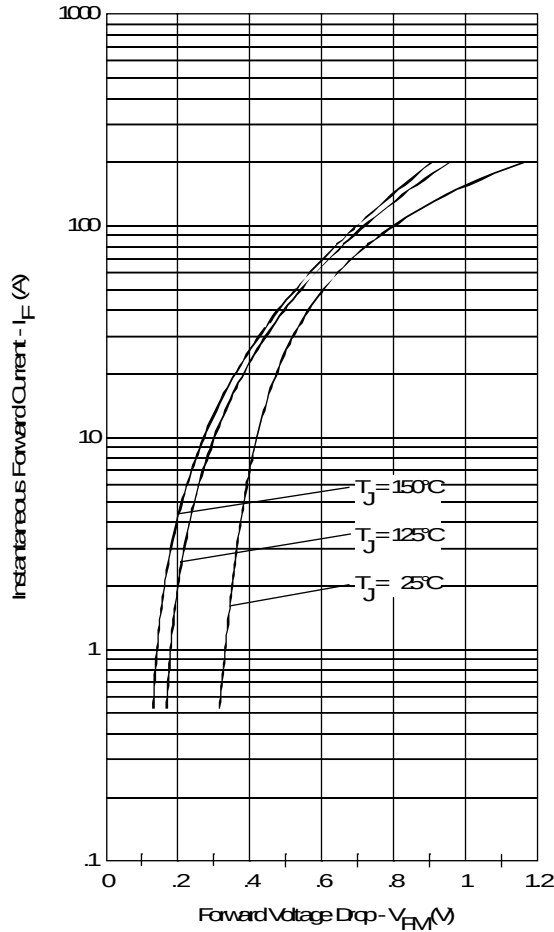


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

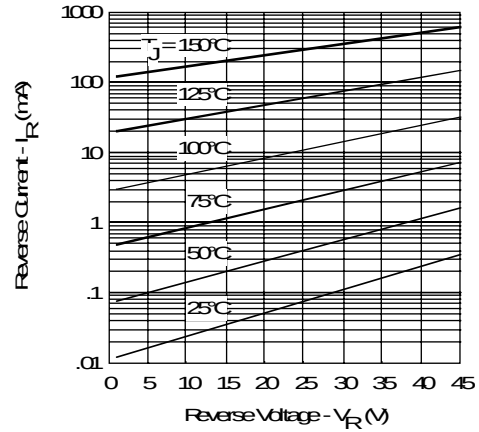


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

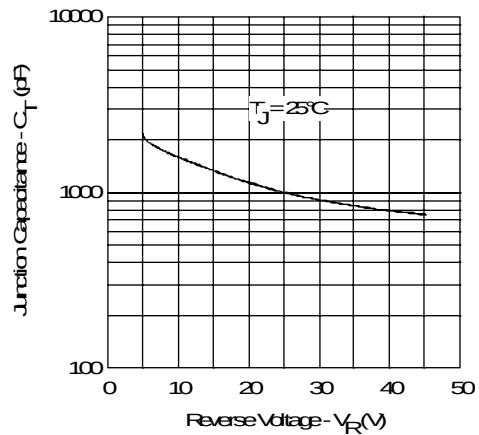


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

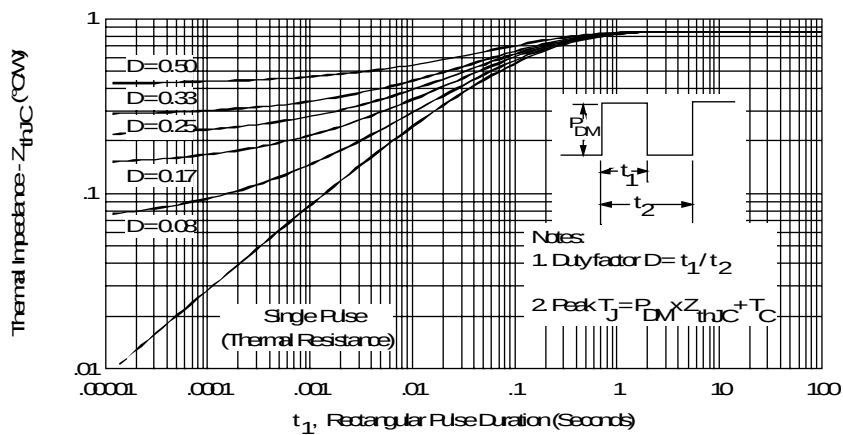


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

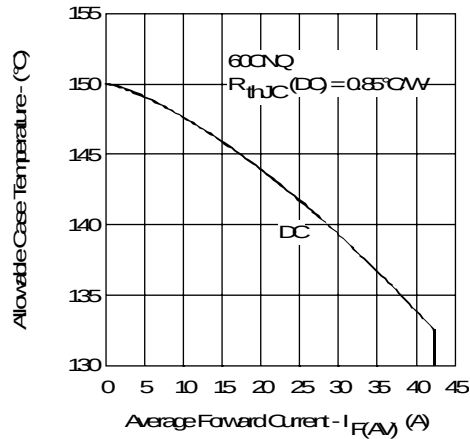


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

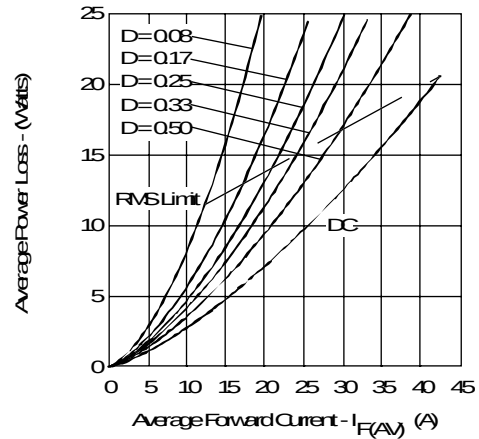


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

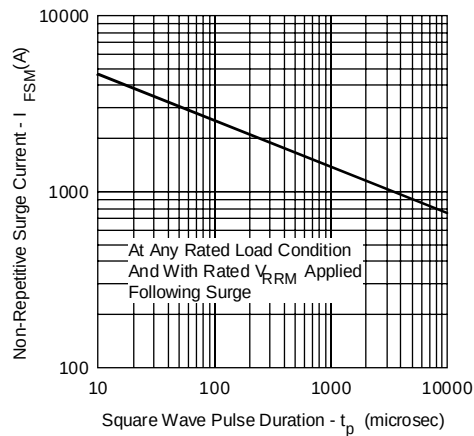


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

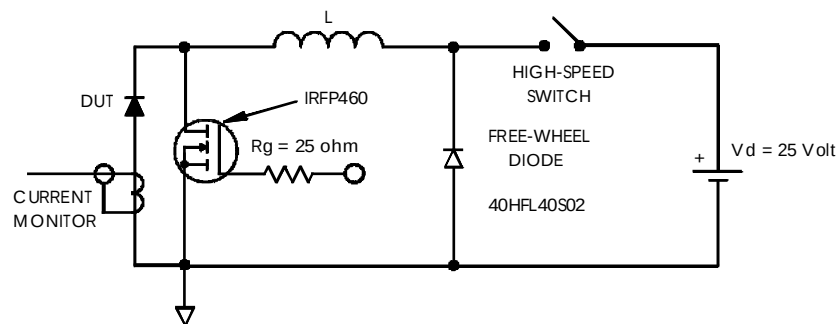


Fig. 8 - Unclamped Inductive Test Circuit