


Features

- ◆ 60 W power supply in 2.0" x 4.0" footprint
- ◆ Supplies 60 W with convection cooling
- ◆ Single-, dual- and triple output models
- ◆ Highest efficiency of 88% typ.
- ◆ Operating temperature range -10°C to +70°C
- ◆ EMI filter meets EN 55022, level B
- ◆ Compliance with EN 61000-3-2
- ◆ Low leakage current
- ◆ 3-year product warranty

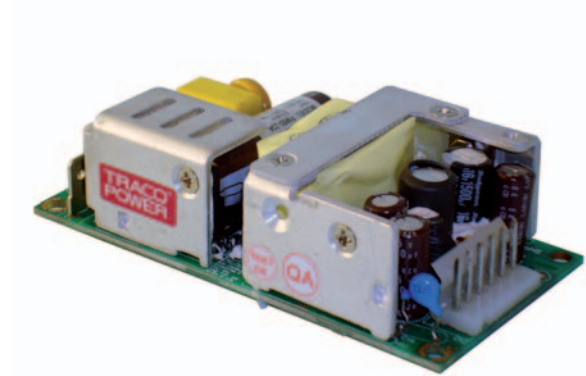

The new TOP-60 series AC/DC open frame power supplies with Industry standard 2.0" x 4.0" (50.8 x 101.6 mm) footprint feature single-, dual- and triple output models with up to 60 Watt continuous output power. The high efficiency allows an operation up to 70°C with convection cooling.

Compliance with global safety and EMC standards qualify these power supplies for industrial and IT applications.

Models				
Order Code	Output Power nominal	Output 1	Output 2 ¹⁾	Output 3 ¹⁾
TOP 60105	55 W	5.0 VDC / 11.0 A		
TOP 60112	60 W	12 VDC / 5.0 A		
TOP 60115	64 W	15 VDC / 4.3 A		
TOP 60124	64 W	24 VDC / 2.7 A		
TOP 60148	64 W	48 VDC / 1.35 A		
TOP 60252	55 W	+5.0 VDC / 6.0 A (8.0 A) ²⁾	+12 VDC / 3.0 A	
TOP 60254	55 W	+5.0 VDC / 6.0 A (8.0 A) ²⁾	+24 VDC / 1.5 A	
TOP 60522	55 W	+5.0 VDC / 6.0 A (8.0 A) ²⁾	+12 VDC / 3.0 A	-12 VDC / 0.5 A
TOP 60533	55 W	+5.0 VDC / 6.0 A (8.0 A) ²⁾	+15 VDC / 2.4 A	-15 VDC / 0.5 A
TOP 60316	38 W	+3.3 VDC / 6.0 A (8.0 A) ²⁾	+5.2 VDC / 3.0 A	+12 VDC / 0.5 A
TOP 60317	38 W	+5.0 VDC / 6.0 A (8.0 A) ²⁾	+3.3 VDC / 1.5 A	+12 VDC / 0.5 A
TOP 60318	55 W	+5.0 VDC / 6.0 A (8.0 A) ²⁾	+24 VDC / 1.5 A	-12 VDC / 0.5 A

¹⁾ Total power should not exceed nominal power

²⁾ Peak current for max. 10 sec. or with forced air cooling

Input Specifications

Input voltage	– nominal – AC input range – DC input range	100 – 240 VAC (universal input) 90 – 264 VAC (with derating at low input) 110 – 370 VDC (max. 40 W output power at input below 120 VDC)
Input frequency		47 – 63 Hz
Harmonic limits		EN 61000-3-2, class A
Earth leakage current		150 µA max. @264 VAC, 63 Hz
Inrush current	– 115 VAC ($< 2\text{ms}$, cold start at 25°C) – 230 VAC	30 A typ. 60 A typ.
Input protection		T3.15 A internal fuses (line and neutral)
Recommended circuit breaker		5 A (characteristic C or slow blow fuse)

Output Specifications

Voltage set accuracy	single output models: 2 % max. multi output models, output 1: 3 % max. multi output models, other outputs: 5 % max.
Regulation	– Input – Load variation single output models: 0.5 % max. multi output models, output 1: 2 % max. multi output models, other outputs: 3 % max. 5 % max.
Minimum load (to meet regulation specs)	multi output models, output 1: 0.5 A multi output models, output 2: 0.1 A (not required for single output models and output 3 of multi output models)
Ripple and noise (20MHz Bandwidth)	3.3 & 5 VDC models: $<100\text{ mVp-p}$ other models: 1 % V_{out}
Overvoltage protection (output 1 only)	at 110 % – 135 % of V_{out} nominal
Short circuit protection	foldback (automatic recovery)
Capacitive load	TOP 60105/60112/60115/60124/60148 models: 3300/2200/1500/470/0 µF max. TOP 60252/60254 models: 2200/82 µF max. TOP 60522/60316/60317/60533/60318 models: 1500/5600/1200/470/330 µF max.
Transient response (25 % load step change)	500 µs typ.
Hold-up time	– $V_{in} = 110\text{ VAC}$: 12 ms typ. – $V_{in} = 230\text{ VAC}$: 15 ms typ.


General Specifications

Temperature ranges	– Operating: -10°C to $+70^{\circ}\text{C}$ – Storage (non-operating): -40°C to $+85^{\circ}\text{C}$
Power derating	2.5 %/K above $+50^{\circ}\text{C}$
Humidity (non condensing)	0 – 95 % rel. H max.
Efficiency	80 – 88 % 75 % for TOP 60316 & TOP 60317
Switching frequency	62 kHz typ. (pulse width modulation)
Altitude during operation	up to 3'000 m (10'000 ft) approved
Start-up time	– $V_{in} = 115\text{ VAC}$: $<3.5\text{s}$ – $V_{in} = 230\text{ VAC}$: $<2\text{s}$
Electromagnetic compatibility	– Electrostatic discharge ESD: EN 61000-4-2 $\pm 8\text{ kV}$ / $\pm 6\text{ kV}$ – RF field susceptibility: EN 61000-4-3 3 V/m – Electrical fast transient / burst immunity input: EN 61000-4-4 $\pm 2\text{ kV}$ – Electrical fast transient / burst immunity output: EN 61000-4-4 $\pm 2\text{ kV}$ – Surge immunity line – neutral ground: EN 61000-4-5, $\pm 2\text{ kV}$ – Surge immunity output: EN 61000-4-5 $\pm 1\text{ kV}$ – Immunity to conducted RF disturbances: EN 61000-4-6 3 Vrms – Magnetic field immunity: EN 61000-4-8 3 A/m – Mains voltage dips and interruptions: EN 61000-4-11 30 % 500 ms, 60 % 100 ms, $>95\%$ 10 ms

General Specifications

Electromagnetic compatibility (EMC), Emissions	– Conducted input RI suppression – Harmonic current emissions	EN 55022 class B, FCC Part 15 class B IEC/EN 61000-3-2, class A & D
Isolation voltage	– Input / Output – Input / Field Ground – Output / Field Ground	4000 VAC 1500 VAC 500 VAC
Reliability /calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>400'000 h
Safety standards	– Information technology equipment	IEC/EN 60950-1
Safety approvals	– CB certificate (IEC 60950-1) – TÜV certificate (UL 60950-1)	www.tracopower.com/products/top60-cb.pdf www.tracopower.com/products/top60-tuv.pdf
Environment	– Vibration acc. IEC 60068-2-6; – Shock acc. IEC 60068-2-27	3 axis, sine sweep, 10-55Hz, 1g, 1oct/min 3 axis, 15g half sine, 11msShock 20 G (3 directions each 3 times)
Connection		pin connector (Molex)
Weight		205 g (7.23 oz)

Dimensions

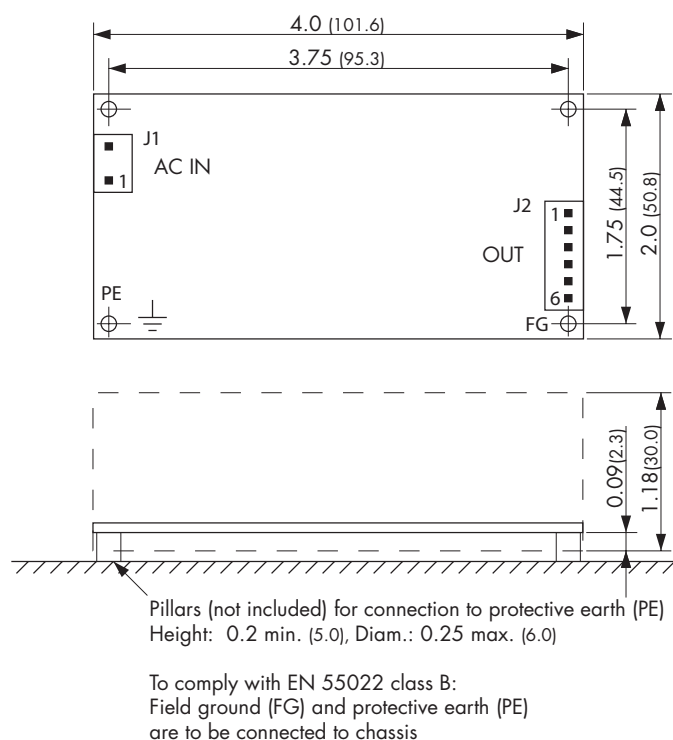

Dimensions in Inch, () = mm

Input J1

Pin	
1	AC in
2	AC in

J1: Molex Series 41791
 mates with Molex crimp terminal: 08-52-0072
 and terminal housing: 09-50-3031

Output J2

Pin	Single output	Dual output	Triple output
1	+Vout 1	Vout 1	Vout 1
2	+Vout 1	Vout 1	Vout 1
3	–Vout 1	com.	com.
4	–Vout 1	com.	com.
5	no con.	no con.	Vout 3
6	no con.	Vout 2	Vout 2

J2: Molex Series 41791
 mates with Molex crimp terminal: 08-52-0072
 and terminal housing: 09-50-3061

Specifications can be changed any time without notice.