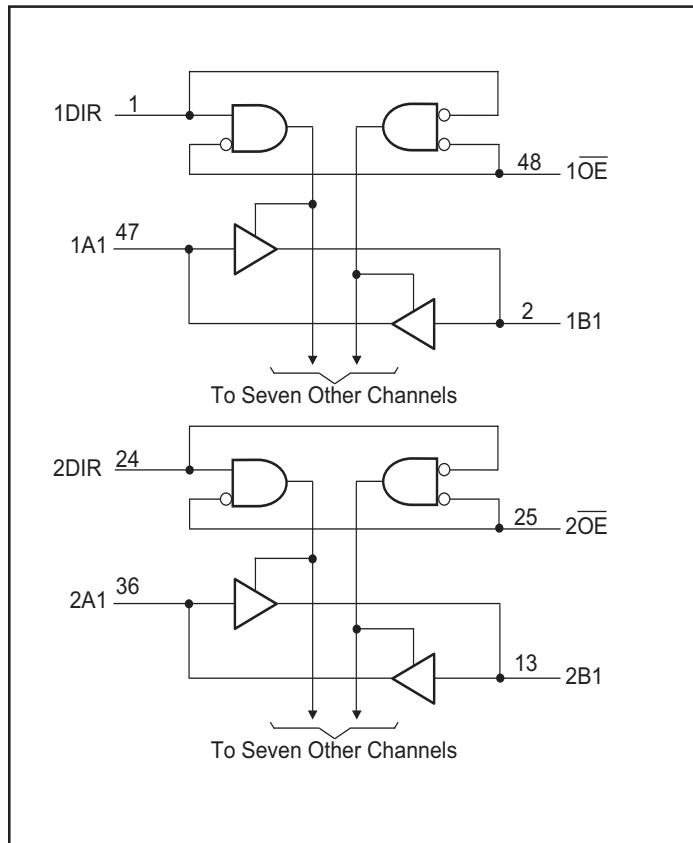


**16-Bit 1.5-2.5V to 3.3V Level Shifting  
Transceiver with 3-State Outputs**
**Features**

- PI74AVC164245LA is designed for low voltage operation: 1.5V-2.5V to 3.3V
- Industrial operation at  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Packag (Pb-free & Green available):
  - 48-pin plastic 240-mil TSSOP (A)
  - 48-pin plastic 173-mil TSVOP (K)

**Truth Table** (each 8-bit section)

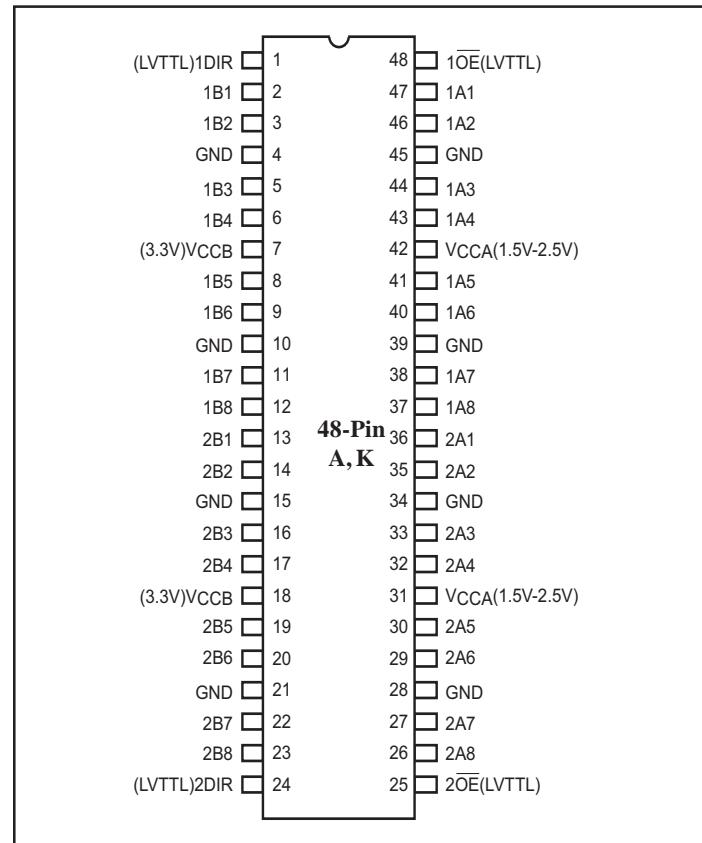
Inputs		Operation
$\overline{\text{OE}}$	DIR	
L	L	B data to A bus
L	H	A data to B bus
H	X	Isolation

**Block Diagram**

**Description**

Pericom Semiconductor's PI74AVC164245LA, a 16-bit (dual-octal) noninverting bus transceiver, contains two separate supply rails: B port (VCCB), set at 3.3V, and A port (VCCA), set to operate at 1.5-2.5V. This arrangement permits translation from a 1.5-2.5V to 3.3V environment and vice versa. The control pins, OE and DIR are controlled by VCCB.

The PI74AVC164245LA is designed for asynchronous communication between data buses.

To ensure the high impedance state during power up or power down, the output-enable (OE) input should be tied to VCC through a pullup resistor: the minimum value of the resistor is determined by the current-sinking capability of the driver.

**Pin Configuration**


## Maximum Ratings

(Absolute maximum ratings over operating free-air temperature range from V<sub>CCB</sub> at 3.3V & V<sub>CCA</sub> at 1.5 - 2.5V, unless otherwise noted)

Supply voltage range:	V <sub>CCA</sub> ..... -0.5V to 3.8V	Continuous output current, I <sub>O</sub> ..... ±50mA
	V <sub>CCB</sub> ..... -0.5V to 4.6V	Continuous current through each V <sub>CC</sub> or GND ..... ±100mA
Input Voltage Range, V <sub>I</sub>	Except I/O ports <sup>(1)</sup> ..... -0.5V to 4.6V	Package thermal impedance, $\theta_{JA}^{(3)}$ : A package ..... 89°C/W
	I/O port A <sup>(2)</sup> ... -0.5V to V <sub>CCA</sub> +0.5V	K package ..... 58°C/W
	I/O port B <sup>(1)</sup> ... -0.5V to V <sub>CCB</sub> +0.5V	V package ..... 94°C/W
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> <0) .....	-50mA	Storage temperature range, T <sub>STG</sub> ..... -65°C to 150°C
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> <0) .....	-50mA	

### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## Recommended Operating Conditions for V<sub>CCB</sub> at 3.3V<sup>(4)</sup>

		Min.	Max.	Units
V <sub>CCB</sub> <sup>(1)</sup>	Supply voltage	3.0	3.6	V
V <sub>IH</sub>	High-level voltage	2		
V <sub>IL</sub>	Low-level voltage		0.8	
V <sub>IA</sub>	Input Voltage	0	V <sub>CCB</sub>	
V <sub>OB</sub>	Output Voltage	0	V <sub>CCB</sub>	
I <sub>OH</sub>	High-level output current		-12	mA
I <sub>OL</sub>	Low-level output current		12	
Δt/Δv	Input transition rise or fall rate		10	ns/V
T <sub>A</sub>	Operating free-air temperature	-40	85	°C

## Recommended Operating Conditions for V<sub>CCA</sub> at 2.5V<sup>(4)</sup>

			Min.	Max.	Units
V <sub>CCA</sub> <sup>(2)</sup>	Supply voltage		2.3	2.7	V
V <sub>IH</sub>	High-level voltage	V <sub>CCA</sub> = 2.3V to 2.7V	1.7		
V <sub>IL</sub>	Low-level voltage	V <sub>CCA</sub> = 2.3V to 2.7V		0.7	
V <sub>IB</sub>	Input voltage		0	V <sub>CCA</sub>	
V <sub>OA</sub>	Output voltage		0	V <sub>CCA</sub>	
I <sub>OH</sub>	High-level output current	V <sub>CCA</sub> = 2.3V		-8	mA
		V <sub>CCA</sub> = 2.7V		-12	
I <sub>OL</sub>	Low-level output current	V <sub>CCA</sub> = 2.3V		8	
		V <sub>CCA</sub> = 2.7V		12	
Δt/Δv	Input transition rise or fall rate			10	ns/V
T <sub>A</sub>	Operating free-air temperature	-40	85	°C	

### Notes:

1. This value is limited to 4.6V maximum.
2. This value is limited to 3.8V maximum.
3. The package thermal impedance is calculated in accordance with JESD 51.
4. To ensure proper device operation, all unused device inputs must be held at the associated V<sub>CC</sub> or GND.

**Recommended Operating Conditions for V<sub>CCA</sub> at 1.5V<sup>(2)</sup>**

			<b>Min.</b>	<b>Max.</b>	<b>Units</b>
V <sub>CCA</sub> <sup>(1)</sup>	Supply voltage		1.4	1.6	V
V <sub>IH</sub>	High-level voltage	V <sub>CCA</sub> = 1.4V to 1.6V	0.65 x V <sub>CCA</sub>		
V <sub>IL</sub>	Low-level voltage	V <sub>CCA</sub> = 1.4V to 1.6V		0.35 x V <sub>CCA</sub>	
V <sub>IB</sub>	Input voltage		0	V <sub>CCA</sub>	
V <sub>OA</sub>	Output voltage		0	V <sub>CCA</sub>	
I <sub>OH</sub>	High-level output current	V <sub>CCA</sub> = 1.4V		-2	mA
		V <sub>CCA</sub> = 1.6V		-6	
I <sub>OL</sub>	Low-level output current	V <sub>CCA</sub> = 1.4V		2	
		V <sub>CCA</sub> = 1.6V		6	
Δt/Δv	Input transition rise or fall rate			10	ns/V
T <sub>A</sub>	Operating free-air temperature		-40	85	°C

**Electrical Characteristics (V<sub>CCB</sub>) (Over recommended operating free-air temperature range for V<sub>CCB</sub> = 3.3V)**

<b>Parameters</b>		<b>Test Conditions</b>	<b>V<sub>CCB</sub></b>	<b>Min.</b>	<b>Typ<sup>(3)</sup></b>	<b>Max.</b>	<b>Units</b>
V <sub>OH</sub> (A to B)	I <sub>OH</sub> = -100μA		3.0V	2.8			V
			3.6V	3.4			
	I <sub>OH</sub> = -12mA		3.0V	2.2			
			3.6V	2.8			
V <sub>OL</sub> (A to B)	I <sub>OL</sub> = 100μA		3.0V			0.2	V
			3.6V			0.2	
	I <sub>OL</sub> = 12mA		3.0V			0.5	
			3.6V			0.5	
I <sub>I</sub>	Control Inputs	V <sub>I</sub> = V <sub>CCB</sub> or GND	3.6V			±5	μA
I <sub>OZ</sub> <sup>(4)</sup>	A or B ports	V <sub>O</sub> = V <sub>CCB</sub> or GND	3.6V			±10	
I <sub>CC</sub>		V <sub>I</sub> = V <sub>CCB</sub> or GND, I <sub>O</sub> = 0	3.6V			20	
ΔI <sub>CC</sub> <sup>(5)</sup>		One input at V <sub>CCB</sub> - 0.6V, Other inputs at V <sub>CCB</sub> or GND	3.0V to 3.6V			500	
C <sub>I</sub>	Control Inputs	V <sub>I</sub> = V <sub>CCB</sub> or GND	3.3V		4.5		pF
C <sub>IO</sub>	A or B ports	V <sub>O</sub> = V <sub>CCB</sub> or GND	3.3V		6.5		

**Notes:**

1. Value limited to 4.6V maximum..
2. To ensure proper device operation, all unused device inputs must be held at the associated V<sub>CC</sub> or GND.
3. Typical values are measured at V<sub>CC</sub> = 3.3V, T<sub>A</sub> = 25°C
4. For I/O ports, the parameter I<sub>OZ</sub> includes the input leakage current.
5. This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than at 0 or the associated V<sub>CC</sub>.

**Electrical Characteristics (V<sub>CCA</sub>) (Over recommended operating free-air temperature range for V<sub>CCA</sub> = 2.5V)**

Parameters		Test Conditions	V <sub>CCA</sub>	Min.	Typ. <sup>(2)</sup>	Max.	Units
V <sub>OH</sub> (B to A)	I <sub>OH</sub> = -100µA	2.3V to 2.7V	V <sub>CC</sub> -0.1				V
		2.3V	1.7				
		2.7V	2.0				
V <sub>OL</sub> (B to A)	I <sub>OL</sub> = 100µA	2.3V to 2.7V				0.2	µA
		2.3V				0.4	
		2.7V				0.5	
I <sub>I</sub>	Control Inputs	V <sub>I</sub> = V <sub>CCA</sub> or GND	2.7V			±5	pF
I <sub>OZ</sub> <sup>(3)</sup>	A or B ports	V <sub>O</sub> = V <sub>CCA</sub> or GND	2.7V			±10	
I <sub>CC</sub>		V <sub>I</sub> = V <sub>CCA</sub> or GND, I <sub>O</sub> = 0	2.7V			30	
ΔI <sub>CC</sub> <sup>(1)</sup>		One input at V <sub>CCA</sub> -0.6V, Other inputs at V <sub>CCA</sub> or GND	2.3V to 2.7V			500	
C <sub>I</sub>	Control Inputs	V <sub>I</sub> = V <sub>CCA</sub> or GND	2.5V			4.5	pF
C <sub>IO</sub>	A or B ports	V <sub>O</sub> = V <sub>CCA</sub> or GND	2.5V			6.5	

**Electrical Characteristics (V<sub>CCA</sub>) (Over recommended operating free-air temperature range for V<sub>CCA</sub> = 1.5V)**

Parameters		Test Conditions	V <sub>CCA</sub>	Min.	Typ. <sup>(2)</sup>	Max.	Units
V <sub>OH</sub> (B to A)	I <sub>OH</sub> = -100µA	1.4V to 1.6V	V <sub>CC</sub> -0.1				V
		1.4V	1.1				
		1.6V	1.3				
V <sub>OL</sub> (B to A)	I <sub>OL</sub> = 100µA	1.4V				0.2	µA
		1.6V				0.3	
		1.6V				0.4	
I <sub>OZ</sub> <sup>(3)</sup>	A or B ports	V <sub>O</sub> = V <sub>CCA</sub> or GND	1.6V			±5	pF
I <sub>CC</sub>		V <sub>I</sub> = V <sub>CCA</sub> or GND, I <sub>O</sub> = 0	1.6V			±20	
ΔI <sub>CC</sub> <sup>(1)</sup>		One input at V <sub>CCA</sub> -0.6V, Other inputs at V <sub>CCA</sub> or GND	1.4V to 1.6V			300	
C <sub>I</sub>	Control Inputs	V <sub>I</sub> = V <sub>CCA</sub> or GND	1.5V			4.5	pF
C <sub>IO</sub>	A or B ports	V <sub>O</sub> = V <sub>CCA</sub> or GND	1.5V			6.5	

**Notes:**

1. The increase in supply current for each input at one of the specified TTL voltage levels rather than at the associated V<sub>CC</sub>.
2. Typical values are measured at V<sub>CC</sub> = 2.5V or 1.5V, T<sub>A</sub> = 25°C
3. For I/O ports, the parameter I<sub>OZ</sub> includes the input leakage current.

### Switching Characteristics

(Over recommended operating free-air temperature range,  $C_L = 30\text{pF}$  (unless otherwise noted), see Figures 1, 2, 3)

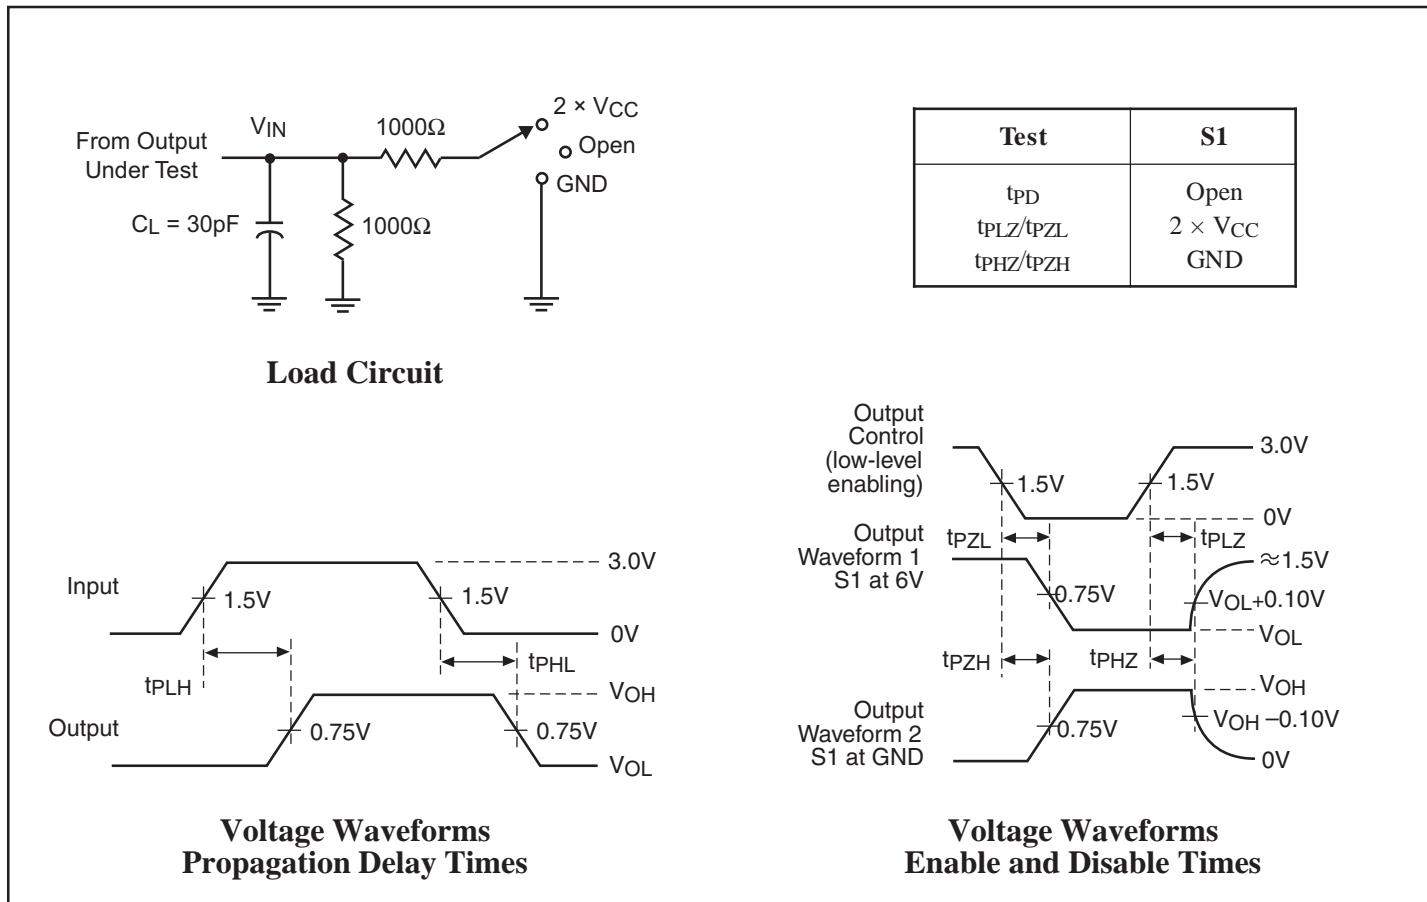
Parameter	From (Input)	To (Output)	PI74AVC164245LA				Units	
			$V_{CCB} = 3.3V \pm 0.3V$					
			$V_{CCA} = 1.5V \pm 0.10V$		$V_{CCA} = 2.5V \pm 0.2V$			
			Min.	Max.	Min.	Max.		
$t_{PD}$	A	B	1.0	3.5	1.0	3.0	ns	
	B	A	1.0	3.5	1.0	2.8		
$t_{EN}$	$\overline{OE}$	B	1.7	4.5	1.2	3.5		
$t_{DIS}$	$\overline{OE}$	B	1.5	4.5	1.0	3.5		
$t_{EN}$	$\overline{OE}$	A	1.7	4.5	1.2	3.5		
$t_{DIS}$	$\overline{OE}$	A	2.0	4.5	1.5	3.5		
$t_{sk(o)}^{(1)}$						0.3		
$t_{sk(b)}^{(1)}$						0.25		

**Note:**

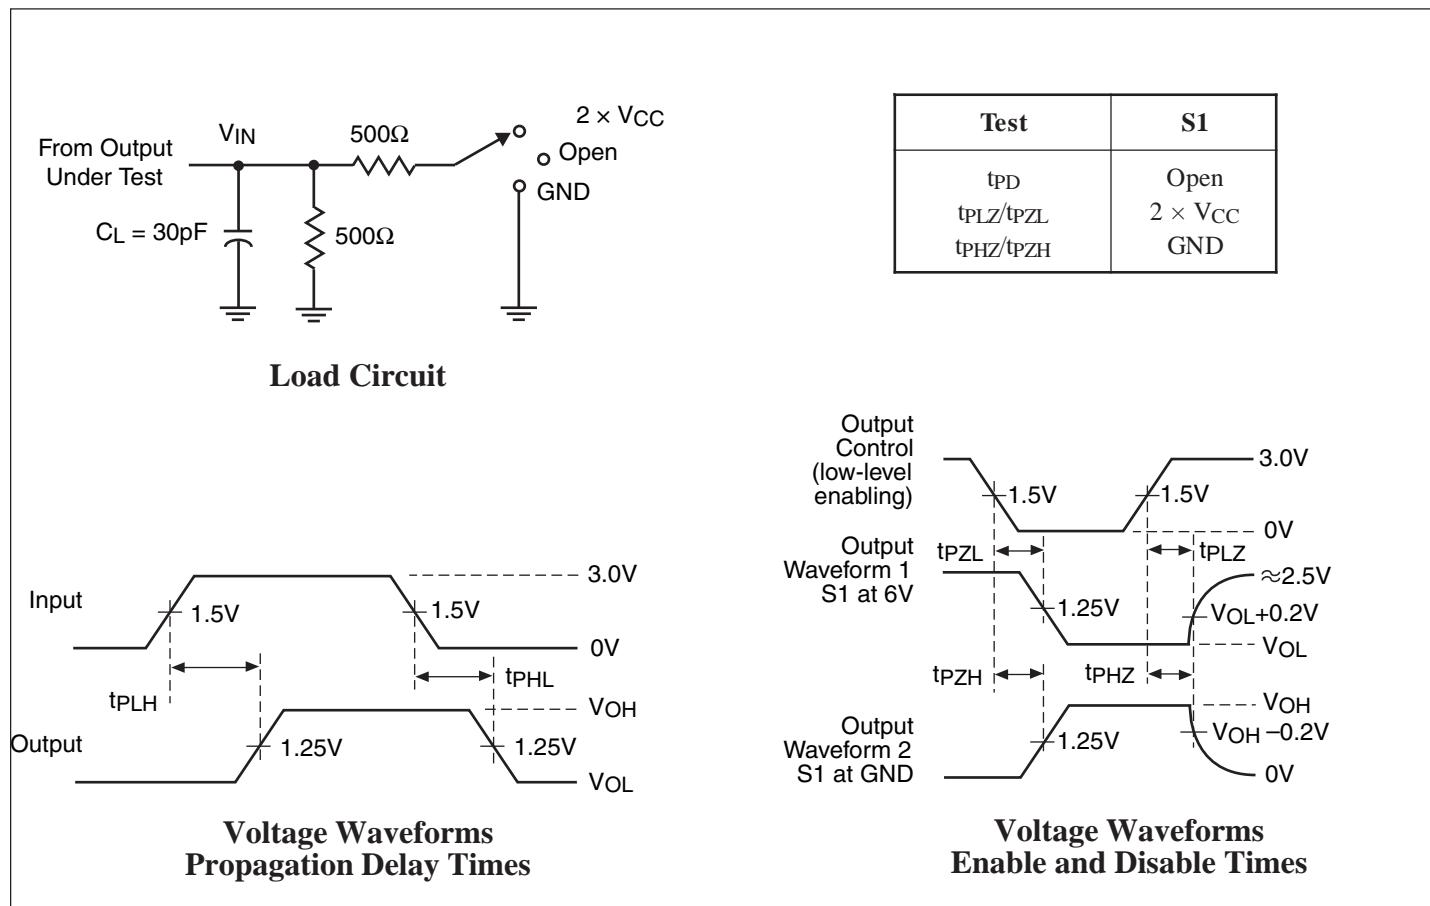
1. This is the skew between any two outputs of the same package, and switching in the same direction. For  $t_{sk(o)}$ , Output 1 and Output 2 are any two outputs. For  $t_{sk(b)}$ , Output 1 and Output 2 are in the same bank.  
These parameters are warrented but not production tested.

### Operating Characteristics, $T_A = 25^\circ\text{C}$

Parameters		Test Conditions	$V_{CCA} = 2.5V$	Units
			$V_{CCB} = 3.3V$	
$C_{PD}$ Power Dissipation Capacitance	Outputs Enabled (A or B)	$C_L = 30\text{pF}$ , $F = 10\text{ MHz}$	56	pF
			6	

**Parameter Measurement Information,  $V_{CCA} = 1.5V \pm 0.10V$** 

**Figure 1. Load Circuit and Voltage Waveforms**
**Notes:**

- $C_L$  includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics: PRR  $\leq 10\text{MHz}$ ,  $Z_O = 50\Omega$ ,  $t_R \leq 2.5\text{ns}$ ,  $t_F \leq 2.5\text{ns}$ .
- The outputs are measured one at a time with one transition per measurement.
- $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{PD}$ .
- $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{EN}$ .
- $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .

**Parameter Measurement Information,  $V_{CCA} = 2.5V \pm 0.2V$** 

**Figure 2. Load Circuit and Voltage Waveforms**
**Notes:**

- $C_L$  includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10\text{Mz}$ ,  $Z_O = 50\Omega$ ,  $t_R \leq 2.5\text{ns}$ ,  $t_F \leq 2.5\text{ns}$ .
- The outputs are measured one at a time with one transition per measurement.
- $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{DIS}$ .
- $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{EN}$ .
- $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .

Parameter Measurement Information,  $V_{CCB} = 3.3V \pm 0.3V$

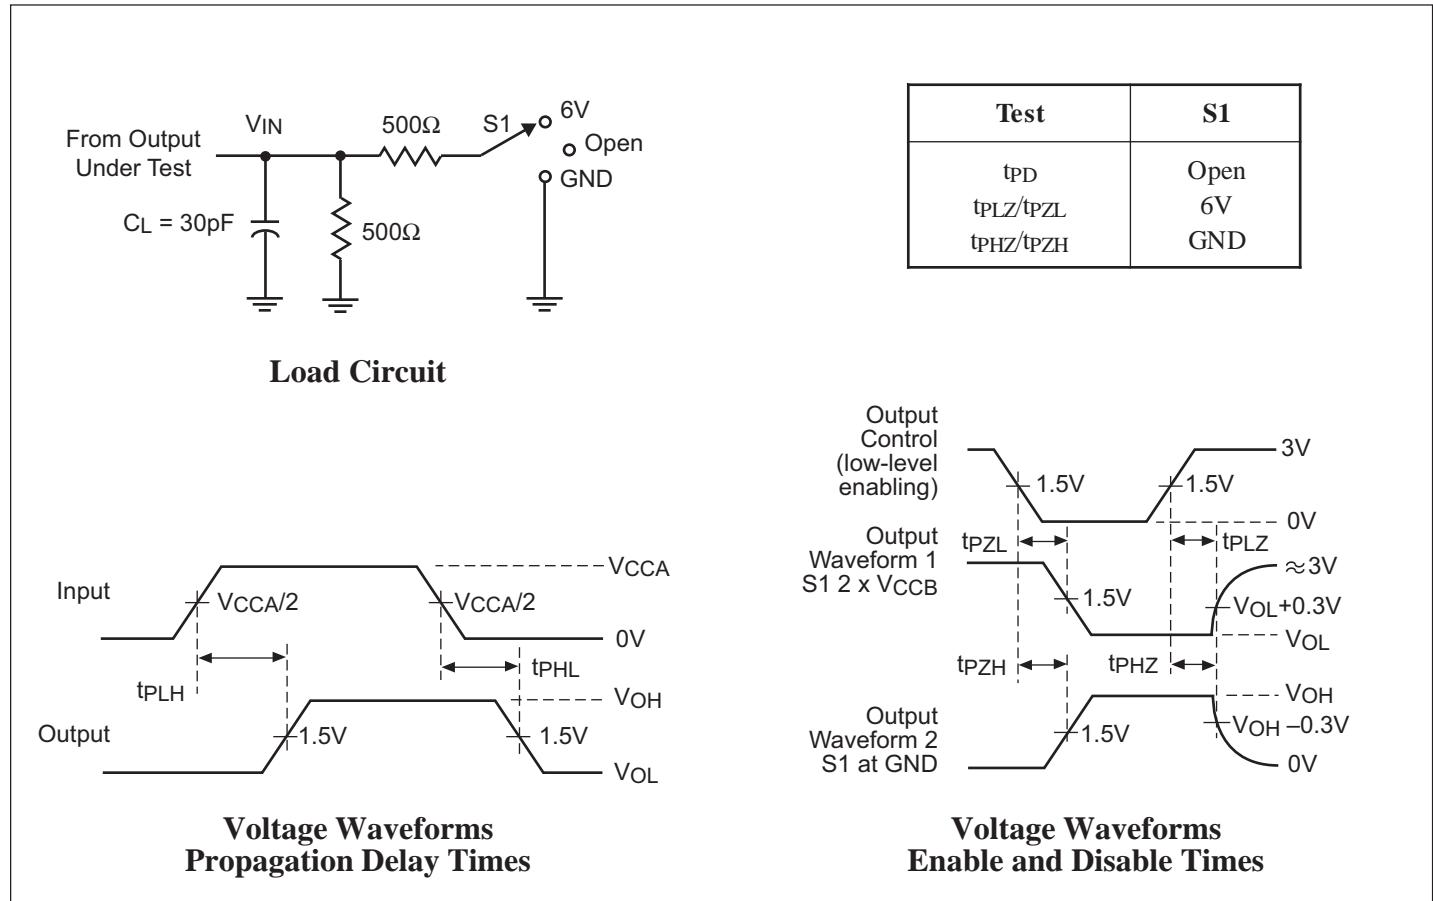
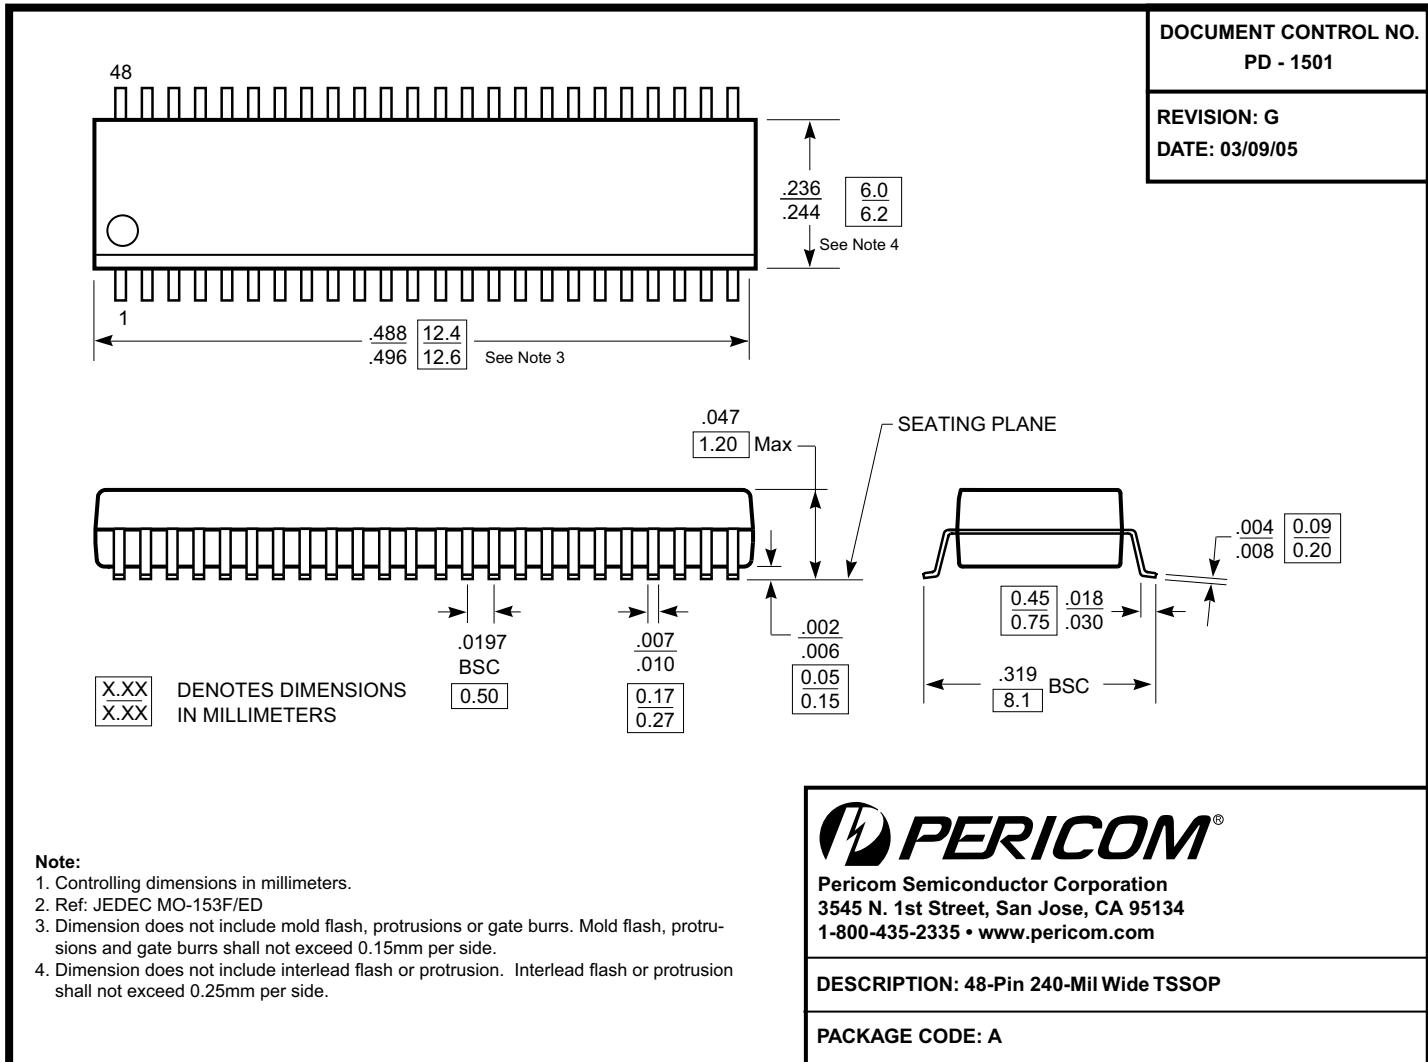


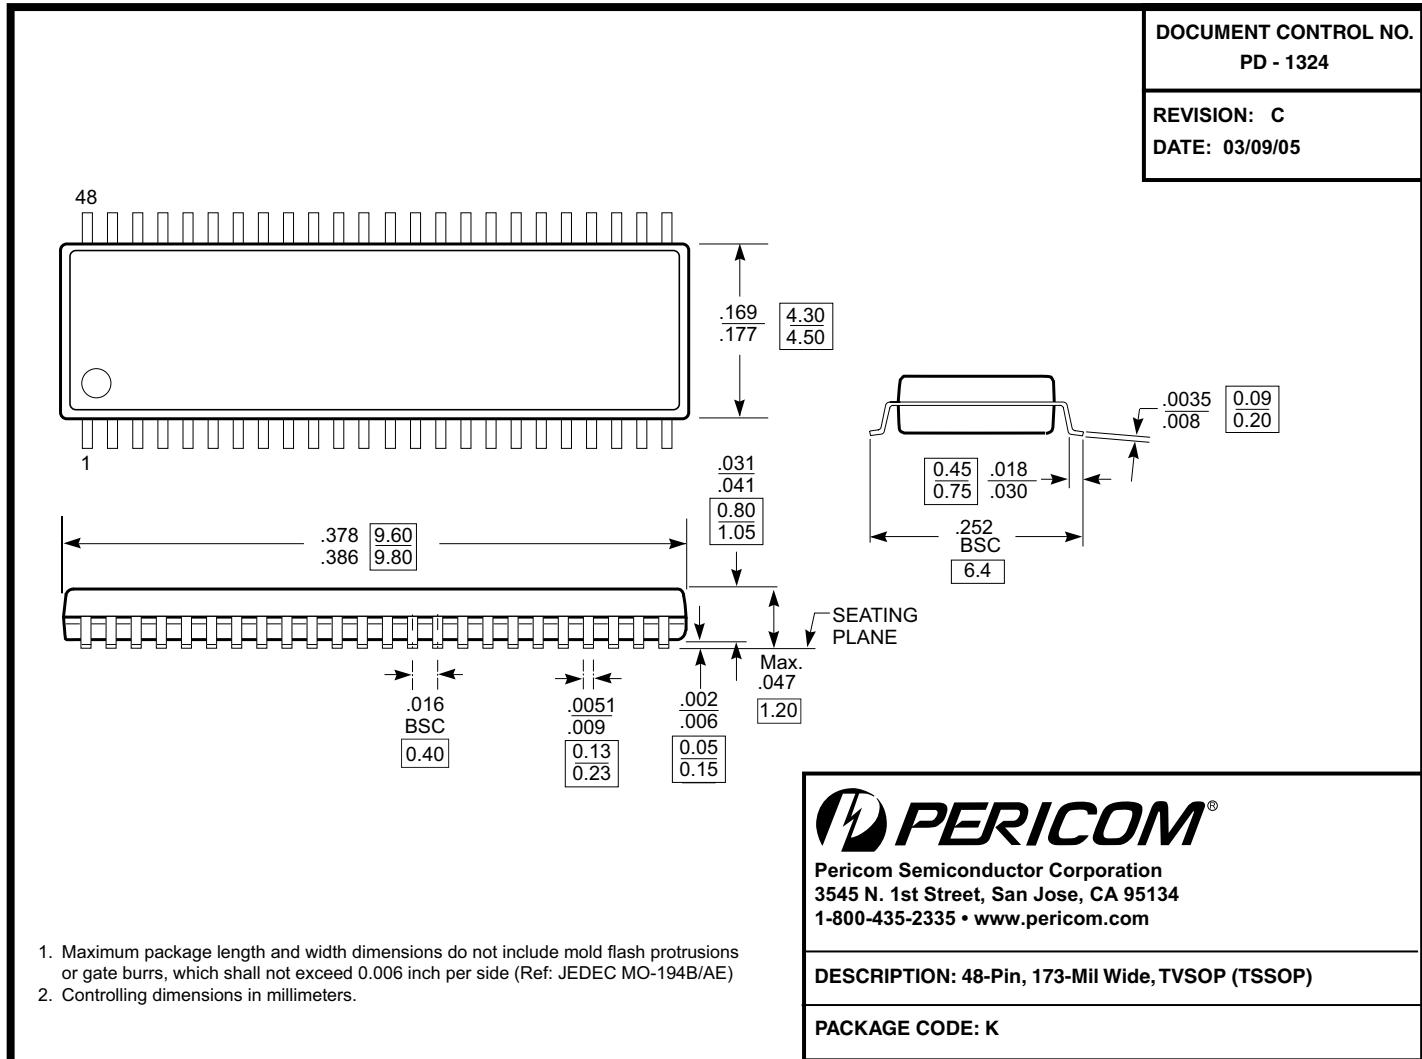
Figure 3. Load Circuit and Voltage Waveforms

**Notes:**

- $C_L$  includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10\text{MHz}$ ,  $Z_O = 50\Omega$ ,  $t_R \leq 2.5\text{ns}$ ,  $t_F \leq 2.5\text{ns}$ .
- The outputs are measured one at a time with one transition per measurement.
- $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{DIS}$ .
- $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{EN}$ .
- $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .

Packaging Mechanical: 48-Pin TSSOP (A)



**Packaging Mechanical: 48-Pin TSSOP (K)**

**Ordering Information**

Ordering Code	Package Code	Speed Grade	Package Description
PI74AVC164245LAAE	A	A	Pb-free & Green, 48-pin, 240-mil wide plastic TSSOP
PI74AVC164245LAKE	K	A	Pb-free & Green, 48-pin, 173-mil wide plastic TSSOP

**Notes:**

1. Thermal characteristics can be found on the company web site at [www.pericom.com/packaging/](http://www.pericom.com/packaging/)