

SUB-MINI & MINIATURE TOGGLES



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11



Fig. 12

Sub-Miniature Toggles

Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	125VAC/28VDC	AMPS 250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Hardware	Spec. Drawing Page No.
35-000	35-000-BU	1	On Off	SPST	3A	1.5	Bat	BCP	0.220	0.195	Solder	2 N, LR, LW	267-A
35-001	35-001-BU	2	On On	SPDT	3A	1.5	Bat	BCP	0.220	0.195	Solder	2 N, LR, LW	267-A
35-002	35-002-BU	3	On On	DPDT	3A	1.5	Bat	BCP	0.220	0.195	Solder	2 N, LR, LW	267-A

Miniature Toggles

Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	125VAC/28VDC	AMPS 250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Hardware	Spec. Drawing Page No.
35-003	35-003-BU	2	On (On)	SPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-B
35-004	35-004-BU	2	On On	SPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-B
35-005	35-005-BU	2	On Off On	SPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-B
35-006	35-006-BU	4	On Off	SPST	5	2	Bat with Boot	BCP	0.350	0.250	Solder	2 N, LR, LW	267-B
35-007	35-007-BU	2	On Off (On)	SPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-B
35-008	35-008-BU	2	(On) Off (On)	SPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-B
35-009	35-009-BU	5	On On On	DPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-C
35-010	35-010-BU	6	On On	DPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-E
35-012	35-012-BU	6	On Off On	DPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-E
35-014	35-014-BU	6	On (On)	DPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-E
35-016	35-016-BU	6	On Off (On)	DPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-E
35-018	35-018-BU	6	(On) Off (On)	DPDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-E
35-024	35-024-BU	7	On On	3PDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-D
35-026	35-026-BU	7	On Off On	3PDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-D
35-036	35-036-BU	8	On On	4PDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-E
35-038	35-038-BU	8	On Off On	4PDT	5	2	Bat	BCP	0.350	0.250	Solder	2 N, LR, LW	267-E
Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	AMPS 125VAC	AMPS 250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Hardware	Spec. Drawing Page No.
35-053	35-053-BU	9	On On	SPDT	5	2	Flat Lever	Metal	0.364	0.250	PCB	2 N, LR, LW	267-F
35-055	35-055-BU	9	On Off On	SPDT	5	2	Flat Lever	Metal	0.364	0.250	PCB	2 N, LR, LW	267-F
35-057	35-057-BU	10	On On	DPDT	5	2	Flat Lever	Metal	0.364	0.250	PCB	2 N, LR, LW	267-F
35-059	35-059-BU	10	On Off On	DPDT	5	2	Flat Lever	Metal	0.364	0.250	PCB	2 N, LR, LW	267-F
35-070	35-070-BU	11	On On	SPDT	6	3	Paddle	Polyamide	0.452	0.500	Solder/QC	N, KN	267-G
35-071	35-071-BU	11	On Off On	SPDT	6	3	Paddle	Polyamide	0.452	0.500	Solder/QC	N, KN	267-G
35-072	35-072-BU	12	On On	DPDT	6	3	Paddle	Polyamide	0.452	0.500	Solder/QC	N, KN	267-G
35-073	35-073-BU	12	On Off On	DPDT	6	3	Paddle	Polyamide	0.452	0.500	Solder/QC	N, KN	267-G

Notes: (On)=Momentary On
BCP=Brass Chrome Plate



KN=Knurled Nut
LR=Lock Ring

LW= Lock Washer
N=Nut(s)

PCB=Printed Circuit Board
QC=Quick Connect

Note: All figures are for illustration purpose only, and the number/type of terminals may vary.

Technical drawing of a mechanical assembly, likely a valve or actuator, showing various views and dimensions. The drawing includes a top view, a side view, and a cross-section view. Key dimensions include diameters (e.g., .315 DIA, .171 DIA, .320 DIA), lengths (e.g., .058, .110, .160), and angles (e.g., 10-18 BURNS). The drawing is labeled with '35-002' and '35-001'.

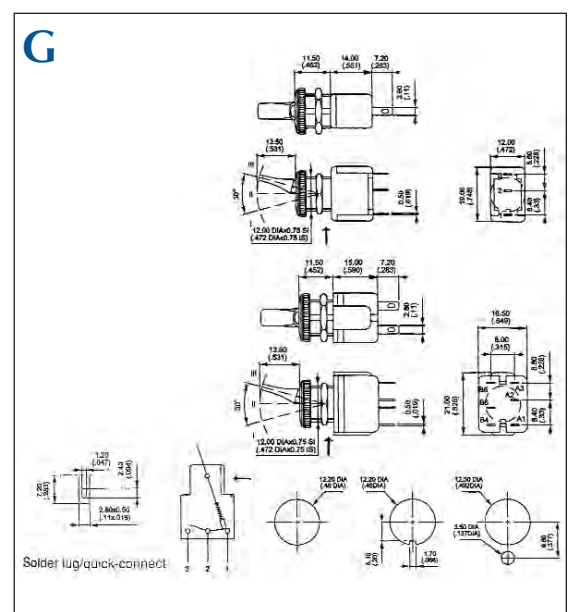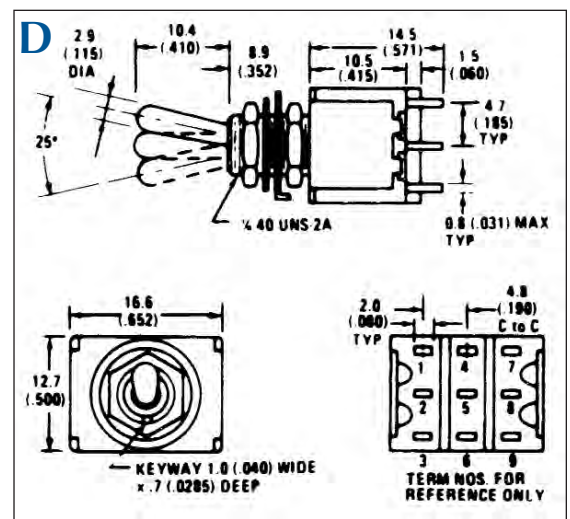

MINIATURE TOGGLES (Cont.)



Fig. 1



Fig. 2




Fig. 3



Fig. 4

Miniature Toggles with Printed Circuit Board Terminals

Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	125VAC/28VDC	AMPS 250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Hardware	Spec. Drawing Page No.
35-087	35-087-BU	1	On On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-A
35-069	35-069-BU	1	On (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-A
35-074	35-074-BU	1	On Off On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-A
35-075	35-075-BU	1	On Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-A
35-077	35-077-BU	1	(On) Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-A
35-079	35-079-BU	2	On On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-B
35-081	35-081-BU	2	On (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-B
35-082	35-082-BU	2	On Off On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-B
35-083	35-083-BU	2	On Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-B
35-085		2	(On) Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB	2 N, LR, LW	269-B

Miniature Toggles with Printed Circuit Board with Integral Bracket Terminals

Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	125VAC/28VDC	AMPS 250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Spec. Drawing Page No.
35-088	35-088-BU	3	On On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-C
35-089	35-089-BU	3	On (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-C
35-091	35-091-BU	3	On Off On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-C
35-093	35-093-BU	3	On Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-C
35-095	35-095-BU	3	(On) Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-C
35-096	35-096-BU	4	On On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-D
35-097	35-097-BU	4	On (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-D
35-098	35-098-BU	4	On Off On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-D
35-099	35-099-BU	4	On Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-D
35-101	35-101-BU	4	(On) Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB†	269-D

Notes: (On)=Momentary On
BCP=Brass Chrome Plate


LW= Lock Washer
N=Nut(s)

LR=Lock Ring
PCB=Printed Circuit Board
PCB†=Printed Circuit Board with Integral Bracket


Note: All figures are for illustration purpose only, and the number/type of terminals may vary.

MINIATURE TOGGLES (Cont.)


A

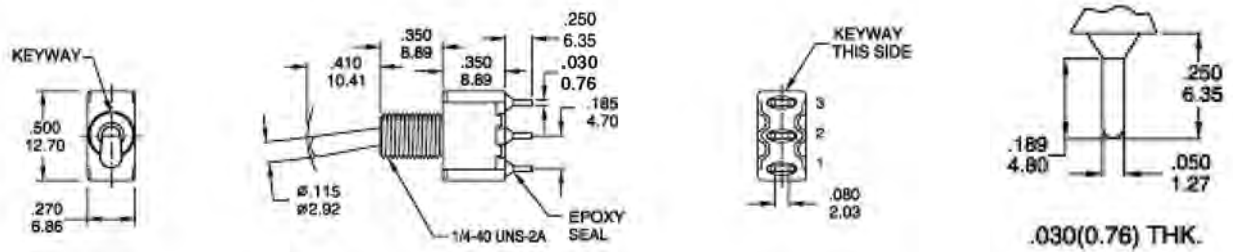


B

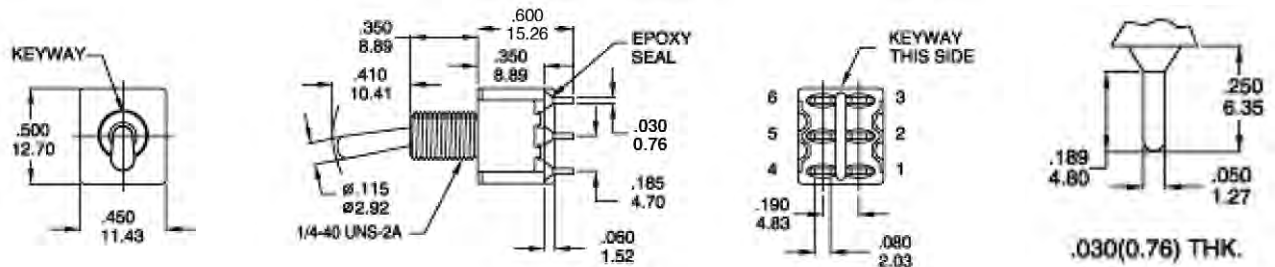

C

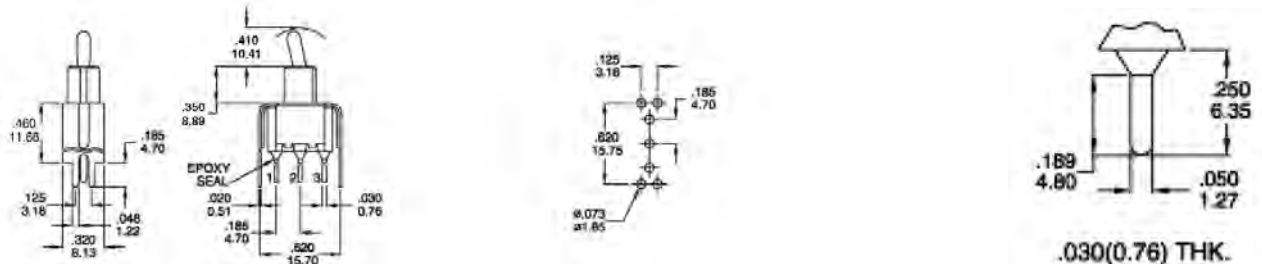

D

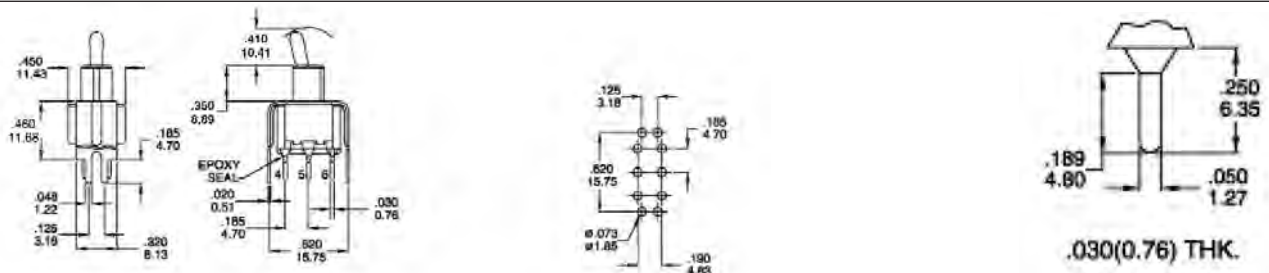

MINIATURE TOGGLES (Cont.)



Fig. 1



Fig. 2



Fig. 3




Fig. 4

Miniature Toggles with Printed Circuit Board Right Angle Vertical Mount Terminals

Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	125VAC/28VDC	AMPS 250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Spec. Drawing Page No.
35-102	35-102-BU	1	On On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-A
35-103	35-103-BU	1	On (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-A
35-104	35-104-BU	1	On Off On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-A
35-105	35-105-BU	1	On Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-A
35-106	35-106-BU	1	(On) Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-A
35-107	35-107-BU	2	On On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-B
35-108	35-108-BU	2	On (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-B
35-109	35-109-BU	2	On Off On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-B
35-111	35-111-BU	2	On Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-B
35-113	35-113-BU	2	(On) Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB++	271-B

Miniature Toggles with Printed Circuit Board Right Angle Horizontal Mount Terminals

Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	125VAC/28VDC	AMPS 250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Spec. Drawing Page No.
35-115	35-115-BU	3	On On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-C
35-121	35-121-BU	3	On (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-C
35-122	35-122-BU	3	On Off On	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-C
35-123	35-123-BU	3	On Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-C
35-125	35-125-BU	3	(On) Off (On)	SPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-C
35-127	35-127-BU	4	On On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-D
35-129	35-129-BU	4	On (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-D
35-131	35-131-BU	4	On Off On	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-D
35-133	35-133-BU	4	On Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-D
35-135	35-135-BU	4	(On) Off (On)	DPDT	5	2	Bat	BCP	0.350"	0.250"	PCB+++	271-D

Notes: (On)=Momentary On
BCP=Brass Chrome Plate

KN=Knurled Nut
LR=Lock Ring

LW= Lock Washer
N=Nut(s)

PCB=Printed Circuit Board
PCB+=Printed Circuit Board with Integral Bracket
QC=Quick Connect
PCB++=Printed Circuit Board Right Angle Vertical Mount
PCB+++ =Printed Circuit Board Right Angle Horizontal Mount



Fig. 5



Fig. 6



Fig. 7



Fig. 8

Retail Part No.	Bulk Part No.	Figure No.	Circuit Function	Poles/Throws	AMPS 125VAC	AMPS 250VAC	AMPS 12VDC	HP 125-250VAC	Actuator Style	Color	Bushing Length	Mounting Hole	Terminal Type	Hardware	Spec. Drawing Page No.
35-090	35-090-BU	5	On Off	SPST			16		Paddle*	Red	0.342	0.500	QC .250"	N, LN	271-E
35-092	35-092-BU	5	On Off	SPST			16		Paddle*	Green	0.342	0.500	QC .250"	N, LN	271-E
35-094	35-094-BU	5	On Off	SPST			16		Paddle*	Amber	0.342	0.500	QC .250"	N, LN	271-E
35-3008	35-3008-BU	6	On Off	SPST	15	10		3/4	Paddle	Black		0.550 x 1.125	QC .250"	N, LN	271-F
35-3091	35-3091-BU	7	On Off	SPST	15	10		3/4	Paddle**	Amber		0.550 x 1.125	QC .250"	N, LN	271-F
35-3092	35-3092-BU	7	On Off	SPST	15	10		3/4	Paddle**	Red		0.550 x 1.125	QC .250"	N, LN	271-F
35-3140	35-3140-BU	8	On Off	SPST	15	10		3/4	Paddle*	Red/Green	0.379	0.500	QC .250"	N, FN	271-G

Notes: *Lighted Paddles (12V Incandescent)

**Lighted Base (125 V Neon)

FN=Face Nut





HP=Horse Power

LN=Locking Nut




N=Nut

QC=Quick Connect

Note: All figures are for illustration purpose only, and the number/type of terminals may vary.

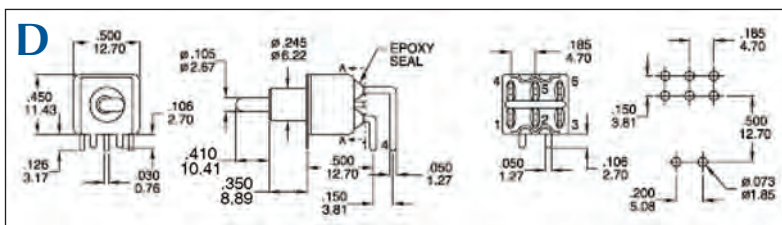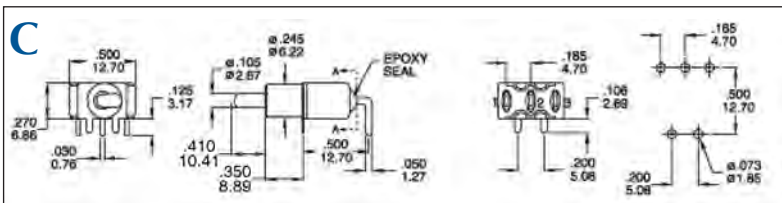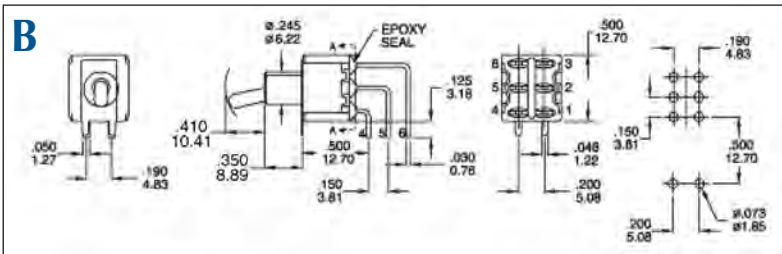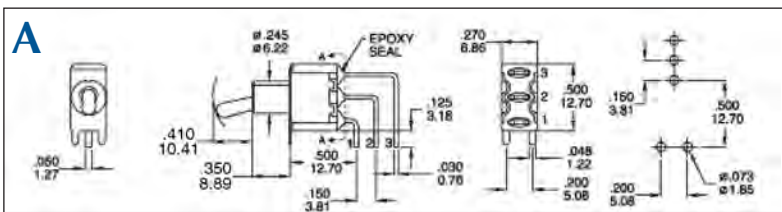

MEDIUM DUTY TOGGLES

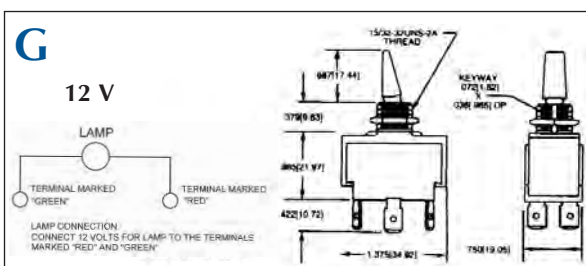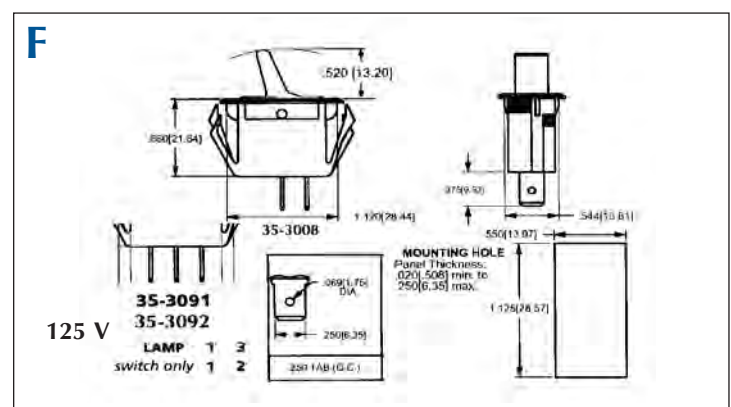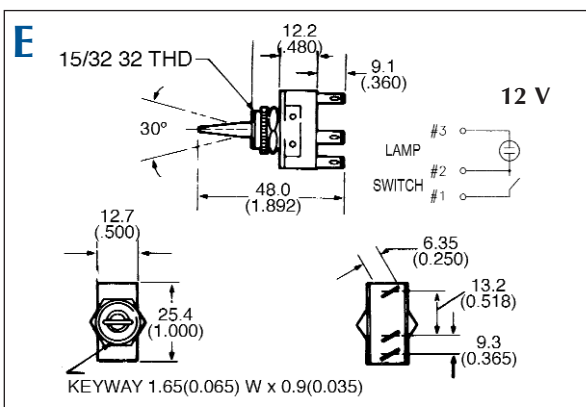

MEDIUM DUTY TOGGLES (Cont.)



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9









Retail Part No.	Bulk Part No.	Fig. No.	Circuit Function	Poles/Throws	Amps 125VAC	Amps 250VAC	HP 125-250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Hardware	Spec. Drawing Page No.
35-132	35-132-BU	1	On On	DPDT	3			Bat	Metal	0.418	0.500	Solder	2 N, ID	273-A
35-064	35-064-BU	2	On Off	SPST	4	2		Bat	Metal	0.418	0.500	Solder	2 N, ID	273-A
35-076	35-076-BU	3	Off (On)	SPST	6	3	1/4	Bat	Metal	0.465	0.500	Solder	N, KN	273-B
35-086	35-086-BU	3	On Off (On)	SPDT	6	3	1/4	Bat	Metal	0.465	0.500	Solder	N, KN	273-B
35-114	35-114-BU	3	On On	SPDT	6	3	1/4	Bat	Metal	0.465	0.500	Solder	N, KN	273-B
35-116	35-116-BU	3	On (On)	SPDT	6	3	1/4	Bat	Metal	0.465	0.500	Solder	N, KN	273-B
35-117	35-117-BU	4	On On	DPDT	6	3	1/4	Bat	Metal	0.468	0.500	QC .250"	N, KN	273-C
35-118	35-118-BU	4	On Off	DPST	6	3		Bat	Metal	0.468	0.500	QC .250"	N, KN	273-C
35-154	35-154-BU	5	On (On)	DPDT	6	3	1/4	Bat	Metal	0.465	0.500	Solder	N, KN	273-D
35-160	35-160-BU	6	On Off	SPST	6	3		Bat	Metal	0.465	0.500	Solder	N, KN	273-E
35-167	35-167-BU	7	On Off	SPST	6	3		Bat	Metal	0.470	0.500	Screw	N, KN, Sc	273-F
35-171	35-171-BU	8	On Off	SPST	6	3		Ball	Metal	0.276	0.500	Screw	N, KN, Sc, ID	273-G
35-186	35-186-BU	9	On On	DPDT	6	3	3/4	Paddle	Black Plastic	0.379	0.500	Solder	N, KN	273-H
35-188	35-188-BU	9	On Off On	DPDT	6	3	3/4	Paddle	Black Plastic	0.379	0.500	Solder	N, KN	273-H

Notes: (On)=Momentary On
 *Rated 20A @ 125-277VAC
 HP=Horse Power
 ID=ID Plate
 KN=Knurled Nut

NN=Nickel Nut
 N=Nut(s)
 QC=Quick Connect
 WL=Wire Lead
 Sc=Screw

Note: All figures are for illustration purpose only, and the number/type of terminals may vary.

MEDIUM DUTY TOGGLES (Cont.)

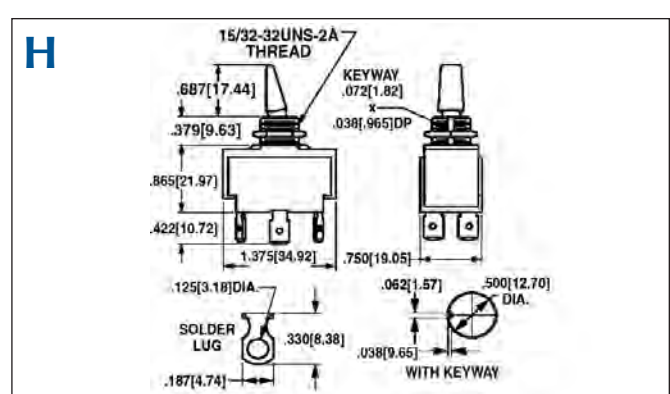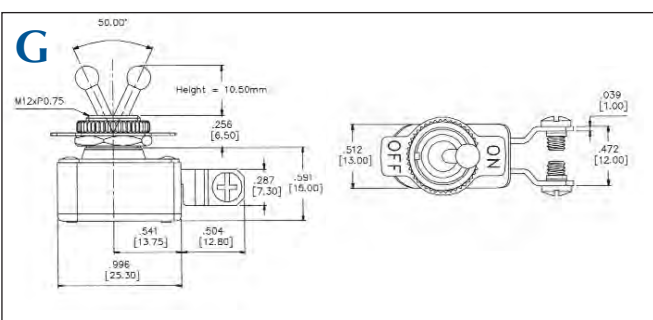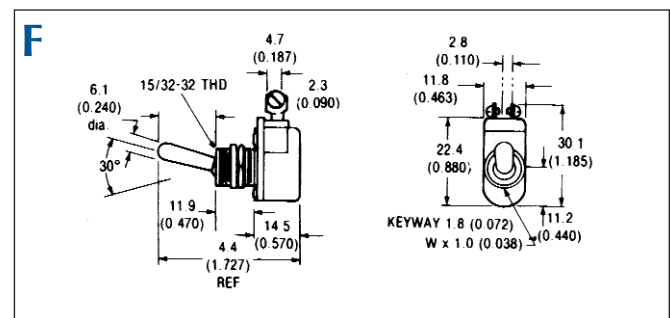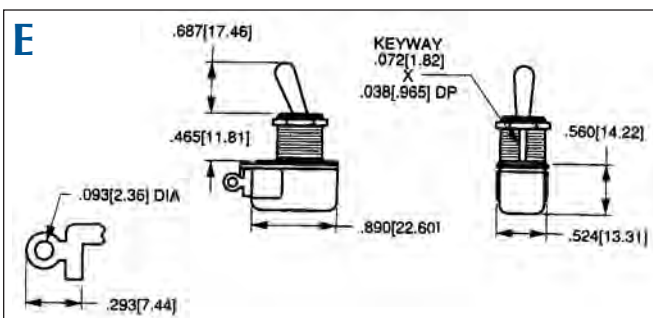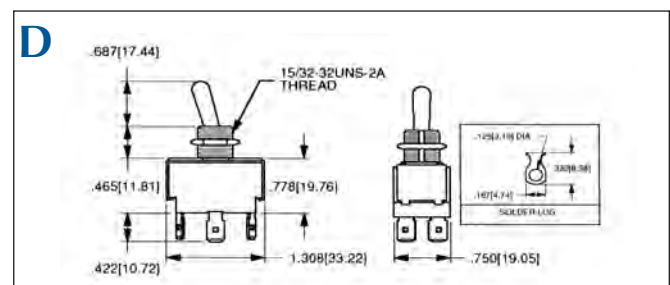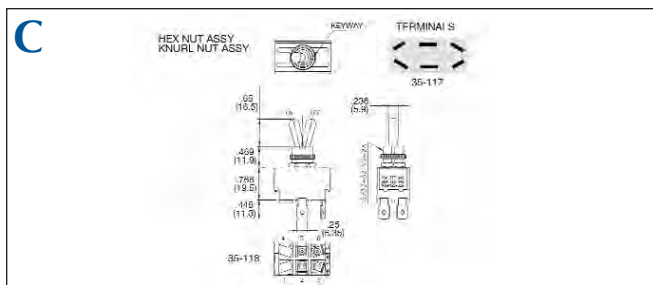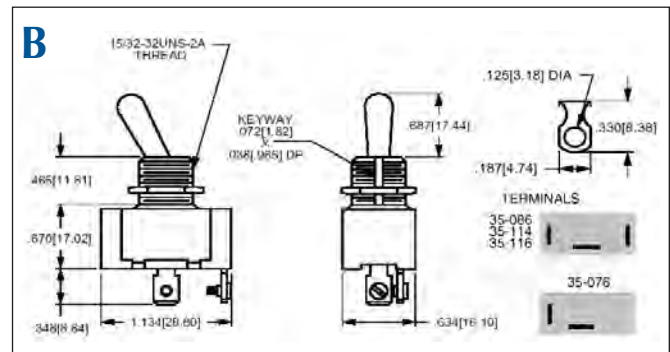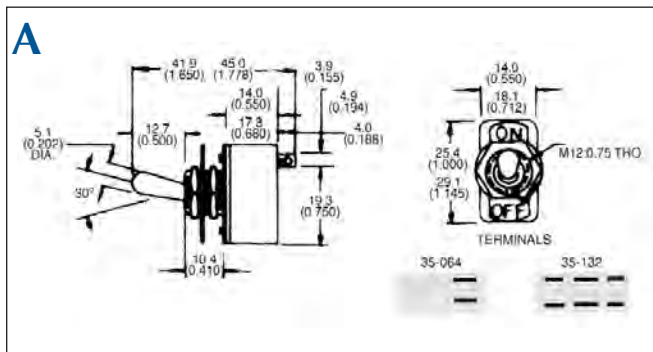

MEDIUM DUTY TOGGLES (Cont.)



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11

Retail Part No.	Bulk Part No.	Fig. No.	Circuit Function	Poles/Throws	Amps 125VAC	Amps 250VAC	HP 125-250VAC	Actuator Style	Actuator Material	Bushing Length	Mounting Hole	Terminal Type	Hardware	Spec. Drawing Page No.
35-854	35-854-BU	1	On Off	SPST	6	3		Bat	Black Plastic	0.342	0.500	WL	KN, ID	275-A
35-1076	35-1076-BU	2	Off (On)	SPST	6	3	1/4	Bat	Metal	0.465	0.500	Screw	N, KN, FN, Sc	275-B
35-1114	35-1114-BU	2	On On	SPDT	6	3	1/4	Bat	Metal	0.465	0.500	Screw	N, KN, FN, Sc	275-B
35-1116	35-1116-BU	2	On (On)	SPDT	6	3	1/4	Bat	Brass	0.465	0.500	Screw	N, KN, FN, Sc	275-B
35-3035	35-3035-BU	3	On Off	SPST	6	3		Bat	Brass	0.325	0.500	Screw	2 N	275-C
35-119	35-119-BU	4	On Off	SPST	10	5	1/2	Bat	Metal	0.500	0.500	QC .250"	N, KN	275-D
35-120	35-120-BU	4	On On	SPDT	10	5	1/2	Bat	Metal	0.500	0.500	QC .250"	N, KN	275-D
35-180	35-180-BU	5	On Off	SPST	10	5	1/2	Paddle	Black Plastic	0.280	0.500	QC .250"/Sd	FN, NN	275-E
35-182	35-182-BU	5	On On	SPDT	10	5	1/2	Paddle	Black Plastic	0.280	0.500	QC .250"/Sd	FN, NN	275-E
35-184	35-184-BU	5	On Off On	SPDT	10	5	1/2	Paddle	Black Plastic	0.280	0.500	QC .250"/Sd	FN, NN	275-E
35-3050	35-3050-BU	6	On Off	SPST	10	4	1/3	Bat	Brass	0.325	0.500	WL	2 N	275-F
35-112	35-112-BU	7	On Off	DPST	15	10		Bat	Metal	0.468	0.500	Solder	N, KN	275-G
35-152	35-152-BU	7	On On	DPDT	15	10		Bat	Metal	0.468	0.500	Solder	N, KN	275-G
35-3127	35-3127-BU	11	(On) Off (On)†	DPDT	15	10	1/2	Bat	Metal	0.465	0.500	QC .250"	FN, N	275-H
35-3153	35-3153-BU	8	(On) Off (On)	SPDT	15	10	3/4	Paddle	Black Nylon	0.379	0.500	QC .250"	FN, NN	275-I
35-3169	35-3169-BU	9	(On) Off (On)	SPDT	15	10	3/4	Paddle	Black Nylon	0.379	0.500	Screw	FN, NN, Sc	275-J
35-178	35-178-BU	10	On Off	SPST	20	20	**	Paddle	Black Plastic	0.342	0.500	QC .250"/Sd	N, BFN	275-K
35-3009	35-3009-BU	5	On Off	SPST	20	10	1-1/2	Paddle	Black Nylon	0.280	0.500	QC .250"/Sd	KN	275-E
35-3150	35-3150-BU	8	On Off On	SPDT	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	QC .250"	FN, NN	275-I
35-3154	35-3154-BU	8	On Off	DPST	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	QC .250"	FN, NN	275-I
35-3156	35-3156-BU	8	On On	DPDT	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	QC .250"	FN, NN	275-I
35-3158	35-3158-BU	8	On Off On	DPDT	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	QC .250"	FN, NN	275-I
35-3160	35-3160-BU	9	On Off	SPST	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	Screw	FN, NN, Sc	275-J
35-3162	35-3162-BU	9	On On	SPDT	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	Screw	FN, NN, Sc	275-J
35-3164	35-3164-BU	9	On Off	DPST	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	Screw	FN, NN, Sc	275-J
35-3166	35-3166-BU	9	On On	DPDT	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	Screw	FN, NN, Sc	275-J
35-3168	35-3168-BU	9	On Off On	DPDT	20*		1-1/2	Paddle	Black Nylon	0.379	0.500	Screw	FN, NN, Sc	275-J

Notes: (On)=Momentary On
 *Rated 20A @ 125-277VAC
 BFN=Brass Face Nut
 FN=Face Nut
 HP=Horse Power
 ID=ID Plate
 KN=Knurled Nut

NN=Nickel Nut
 N=Nut(s)
 QC=Quick Connect
 Sc=Screw
 Sd=Solder
 WL=Wire Lead
 †=Reversing Toggle
 **=1/2 HP@125V, 1 HP@250V

Note: All figures are for illustration purpose only, and the number/type of terminals may vary.

[illegible]

B

Dimensional Specifications: in. [mm]

15/32-32UNS-2A
T-HEAD

488[11.81]

67[0.17.02]

348[8.84]

1.134[28.80]

KEYWAY
0.72[1.82]

0.38[9.65] CP

68[1.71.44]

84[16.10]

12.93[1.8] DIA 330[8.38] 18.74[7.4] 437[11.08] 3506[3.5] 250 TAB (Q.C.) 167 TAB (Q.C.)	0.75[1.91] DIA 337[11.08] 3506[3.5] 250 TAB (Q.C.) 167 TAB (Q.C.)	0.56[1.40] DIA 384[10.00] 18.74[7.4] 167 TAB (Q.C.)
TERMINAL TYPE		
#8-32NG-2 THREAD 141[3.58] 370[9.38] 286[7.28] 508[12.70] DIA 502[1.27]	6.00[152.40] 502[12.70] 378[9.53] 12.93[1.8] DIA 378[9.53] 502[12.70] DIA 12.93[1.8] DIA WITH LOCKING RING	
WIRE LEAD		
508[12.70] DIA 502[1.27] 0.38[9.53]	508[12.70] DIA 502[1.27] 0.38[9.53] WITH KEYWAY	

[illegible]

Technical drawings of two terminal types, 35-119 and 35-120, showing dimensions and keyway specifications.

Terminal Type 35-119:

- Overall height: 6.87 (17.44)
- Height from base to top of terminal: 5.00 (12.7)
- Height from base to bottom of terminal: 5.00 (12.7)
- Height from base to bottom of terminal (with keyway): 3.75 (9.52)
- Base width: 8.75 (22.22)

Terminal Type 35-120:

- Overall height: 7.02 (17.78)
- Height from base to top of terminal: 1.82 (4.63)
- Base width: 3.00 (7.62)

KEYWAY:

- 0.72 x 0.38 DP
- 1.82 x .965

TERMINAL TYPES:

- 35-119
- 35-120

E

Technical drawing of a 35-3009 terminal block. The drawing shows a side view of the component with a central screw terminal and two pins at the bottom. Dimensions are provided in inches and millimeters:

- Top screw terminal height: .687 [17.44]
- Distance from top screw terminal to the main body: .280 [7.11]
- Distance from the main body to the bottom pins: .687 [17.44]
- Distance from the main body to the bottom pins (alternative dimension): .375 [9.52]
- Overall width: 1.000 [25.40]
- Pin spacing: .375 [9.52]

TERMINALS FOR 35-180 35-3009

Technical drawing of the 500A116 connector. The drawing includes two views: a front view on the left and a side view on the right. Dimensions are provided in both inches and millimeters.

Front View Dimensions:

- Top pin spacing: $6 \pm 1/4$ (152.4) ± 6.35
- Pin diameter: $\phi 0.080$ (2.03)
- Bottom pin spacing: $\phi 0.080$ (2.03)
- Overall width: $\phi 0.350$ (8.89)

Side View Dimensions:

- Strip length: STRIP 500A116 (12 / s 1 58)
- Pin length: 562 (14.27)
- Pin diameter: $\phi 0.030$ (0.76)

KEYWAY
.072(1.82)
X
.038(965) DP

TERMINALS

35-182
35-184

588(14.93)

Technical drawing of a Reversing Toggle switch. The drawing includes a side view, a top view, and a detail view of the switch mechanism. Dimensions are provided in inches and millimeters.

Dimensions:

- Top View: .687 [17.44] (Height), .422 [10.72] (Width), 1.308 [33.22] (Width), .778 [19.76] (Height)
- Side View: .465 [11.81] (Height), .750 [19.05] (Width)
- Detail View: 15/32-32UNS-2A THREADED

REVERSING DOUBLE POLE DOUBLE THROW

POSITION

1 (ON) 2 (OFF) 3 (ON)

Reversing Toggle

Technical drawing of the 35-3150 connector. The drawing includes a side view and a top view. Dimensions are provided in inches and millimeters in brackets. Key dimensions include: overall height 88.7 [17.44], mounting hole diameter 0.75 [1.91] DIA, mounting hole offset 0.375 [9.63], body width 0.865 [21.97], body height 0.437 [11.09], base width 0.750 [19.05], base height 0.422 [10.72], and terminal pitch 1.375 [34.92]. The drawing also shows the 15/32-32 UNF-2A thread and the terminal options: 35-3150, 35-3156, 35-3158, and 35-3154.

TERMINAL PLACEMENT

35-3169
35-3162

35-3166
35-3168

35-3164

35-3160

3709 (17.44)
370 (9.63)
865 (21.97)
422 (10.72)
1.375 (34.92)
750 (19.05)
1413 (56)
3709 (39)
286 (7.26)

KEYWAY
0702 (1.82)
X
(328 985) DP

[illegible]