


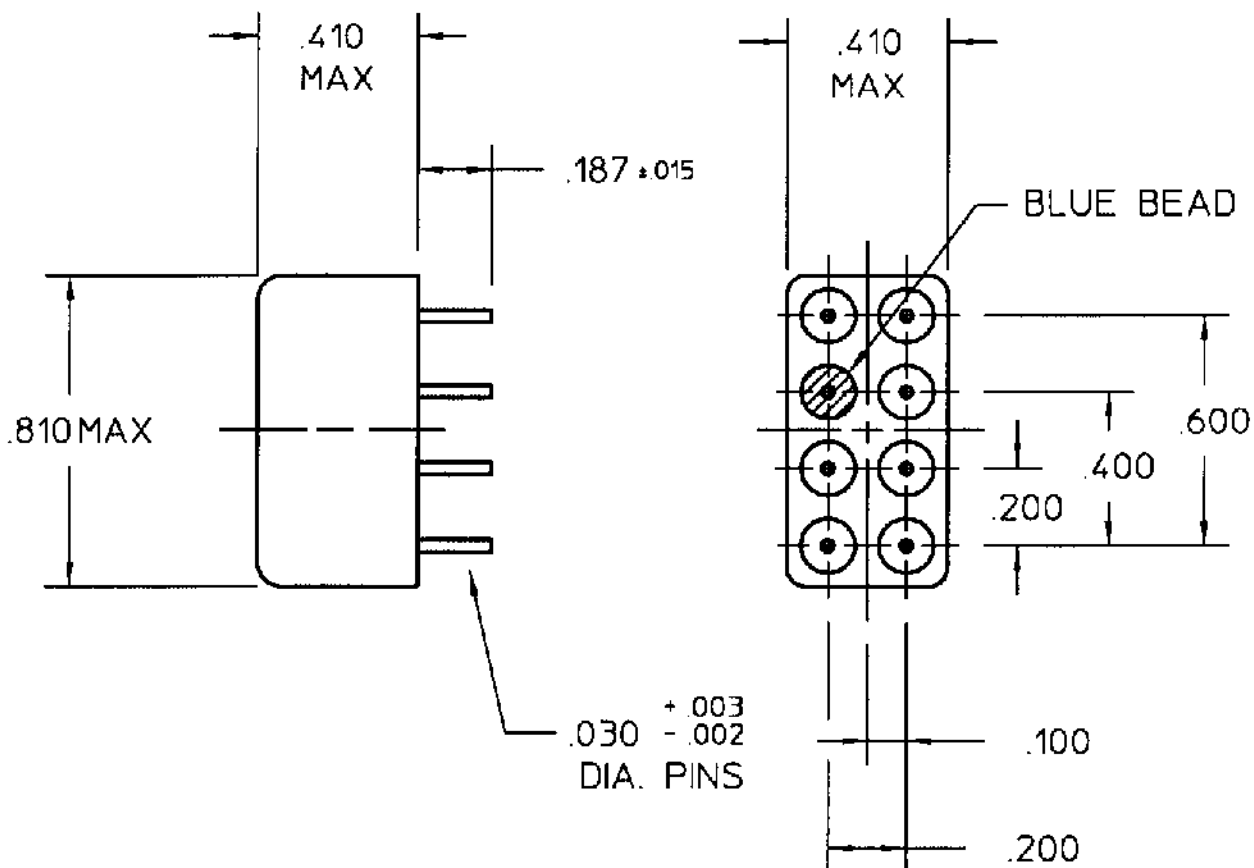

COIL: @ +25 °C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 15.0 VDC
 MUST RELEASE 8.0 VDC MAX 1.5 VDC MIN


ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE
OF -48 VDC WITH BIFILAR COIL
OPERATE & RELEASE 5 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

BLUE BEAD

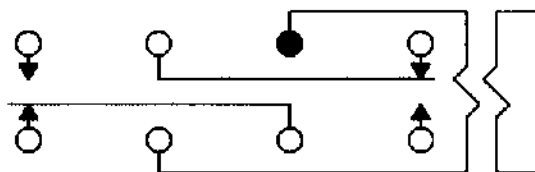

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/14/95 CK. *[Signature]*


COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/22-009M

TYPE "HMB" RELAY

HMB1201K01M