



THM "AUTO" BLADE FUSE HOLDERS

- Accepts Standard Auto Fuses or Low Profile Mini Fuses
- Low insertion force
- Fuse holder fully insulates clips to protect fuse from shorting



2 IN 1 FUSE HOLDER

For Standard: Littelfuse: ATO series/Bussmann ATC series.
For Low Profile: Littelfuse: 891 series/
 Bussmann ATM-LP series




SPECIFICATIONS

Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: High Temp Nylon 46 - UL 94V-0
Current Rating: 20 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)

CAT. NO. 3557-2


Mounting Detail



- Holder assures proper spacing and reduces assembly time
- Thru hole PC mountable, maintains position during wave soldering

MINI FUSE HOLDER

For Mini: Littelfuse: MIN series/
 Bussmann ATM series or equivalent

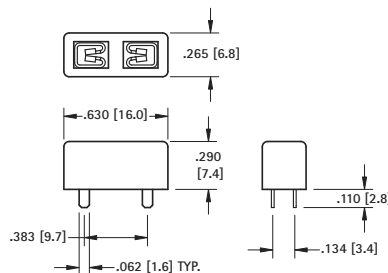


SPECIFICATIONS

Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: High Temp Nylon 46 - UL 94V-0
Current Rating: 20 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)

CAT. NO. 3568

Mounting Detail




STANDARD "AUTO" BLADE FUSE HOLDERS


For Standard: Littelfuse ATO series/Bussmann ATC series or equivalent

VERTICAL FUSE ENTRY

- Thru hole PC mountable, maintains position during wave soldering
- Holder design prevents solder wicking
- Withstands the rigors of shock and vibration
- Holds fuse securely, even after multiple insertions




Mounting Detail




HORIZONTAL FUSE ENTRY

- Designed for low height clearance applications
- Fuse will be inserted parallel to board
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Polarized legs assure proper orientation of clips onto board

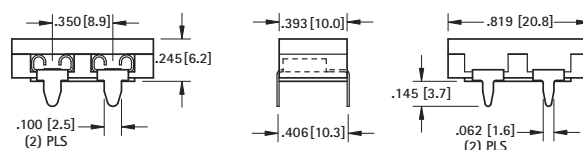


Mounting Detail



SPECIFICATIONS

Contacts: .012 (.30) Brass, Nickel Plate
Insulator: PBT, UL 94V-0
Current Rating: 30 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)

CAT. NO. 3550-2

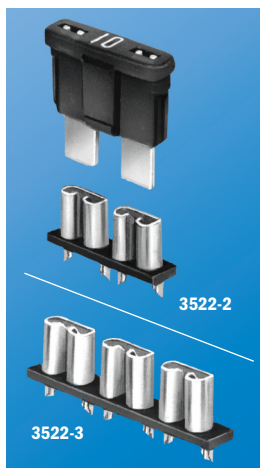

SPECIFICATIONS

Contacts: .016 (.41) Brass, Tin-Nickel Plate
Insulator: Glass filled Nylon, UL 94V-0
Current Rating: 30 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)



CAT. NO.	W
3522-2	.760 (19.3)
3522-3	1.125 (28.6)

MINI "AUTO" BLADE FUSE HOLDER

For Mini: Littelfuse Mini series/Bussmann ATM series or equivalents

VERTICAL FUSE ENTRY

Mounting Detail




SPECIFICATIONS


Material: .012 (.30) Brass, Tin Plate
Insulator: Glass filled Nylon, UL 94V-0
Current Rating: 30 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)

CAT. NO. 3544-2

Mounting Detail



HORIZONTAL FUSE ENTRY

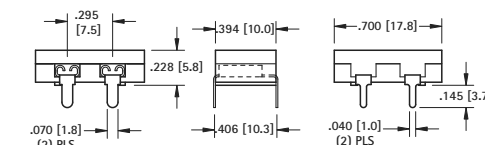

SPECIFICATIONS

Contacts: .012 (.30) Brass, Nickel Plate
Insulator: PBT, UL 94V-0
Current Rating: 30 Amps @ 500V AC
Temperature Rating: -58°F to +292°F (-50°C to +145°C)

CAT. NO. 3549-2







SMT "AUTO" BLADE FUSE HOLDERS

- Compatible with most vacuum and mechanical pick and place assembly systems.
- Fully insulated clips to protect fuses against shorting.


- One piece assembly reduces assembly time
- Withstands shock and vibration.

2 in 1 FUSE HOLDER

For Standard: Littelfuse: ATO series/
Bussmann ATC series.
For Low Profile: Littelfuse: 891 series/
Bussmann ATM-LP series



Mounting Detail



SPECIFICATIONS

Contacts: .016 (.41) Brass, Tin-Nickel Plate

Insulator: High Temperature Nylon 46, UL 94V-0

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

Current Rating: 20 Amps @ 500V AC





CAT. NO. 3587 (Bulk)

CAT. NO. 3587TR (Tape & Reel)


Tape & Reel Spec's: 32mm wide, 16mm pitch, 13 inch reel (750 pieces per reel)

MINI FUSE HOLDER

For Mini: Littelfuse: MIN series/
Bussmann ATM series or equivalent



Mounting Detail



SPECIFICATIONS

Contacts: .016 (.41) Brass, Tin-Nickel Plate

Insulator: High Temperature Nylon 46, UL 94V-0

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

Current Rating: 20 Amps @ 500V AC

CAT. NO. 3588 (Bulk)

CAT. NO. 3588TR (Tape & Reel)

Tape & Reel Spec's: 32mm wide, 16mm pitch, 13 inch reel (500 pieces per reel)

SMT "AUTO" BLADE FUSE CLIPS



- Compatible with most vacuum and mechanical pick and place assembly systems.
- Three low profile designs - Thru board - Vertical entry - Horizontal entry.

- Accepts standard and mini blade automotive blade fuses.
- Clip with Matte-Tin plate is ideal for low temperature soldering applications, for other temperature sensitive components.

- Clips with Tin-Nickel plate are ideal for lead free, high temperature soldering applications.


VERTICAL ENTRY

For Mini: Littelfuse: MIN series/Bussmann ATM series.
For Standard: Littelfuse: ATO series/Bussmann ATC series.
For Low Profile: Littelfuse: 891 series/Bussmann ATM-LP series

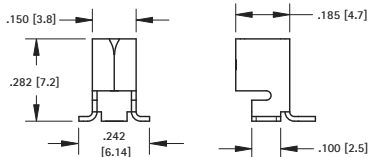

Mounting Detail For Two Clips

L = .684 [17.4] FOR MINI FUSES
L = .834 [21.2] FOR STANDARD
AND LOW PROFILE FUSES



SPECIFICATIONS

Material: .016 (.41) Brass,
Tin-Nickel Plate

Current Rating: 20 Amps @
500V AC



CAT. NO. 3586 (Bulk)

CAT. NO. 3586TR (Tape & Reel)


Tape & Reel Spec's: 16mm wide, 12mm pitch,
13 inch reel (750 pieces per reel)

VERTICAL ENTRY

For Mini: Littelfuse: MIN series/Bussmann ATM series or equivalent

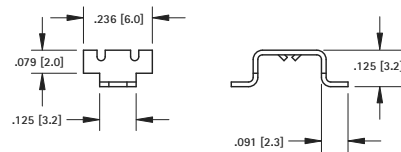

Mounting Detail For Two Clips



SPECIFICATIONS

Material: .016 (.41) Brass,
Matte Tin Plate

Current Rating: 30 Amps @
500V AC




CAT. NO. 3563 (Bulk)

CAT. NO. 3563TR (Tape & Reel)


Tape & Reel Spec's: 24mm wide, 12mm pitch,
13 inch reel (1500 pieces per reel)

HORIZONTAL ENTRY

For Mini: Littelfuse: MIN series/Bussmann ATM series or equivalent

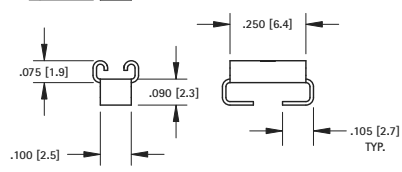

Mounting Detail For Two Clips



SPECIFICATIONS

Material: .012 (.30) Brass,
Tin-Nickel Plate

Current Rating: 15 Amps @ 500V AC

CAT. NO. 3569 (Bulk)

CAT. NO. 3569TR (Tape & Reel)

Tape & Reel Spec's: 24mm wide, 8mm pitch,
13 inch reel (2000 pieces per reel)