

### FEATURES

**Low Noise:** 80 nV p-p (0.1 Hz to 10 Hz), 3 nV/ $\sqrt{\text{Hz}}$

**Low Drift:** 0.2  $\mu\text{V}/^\circ\text{C}$

**High Speed:** 2.8 V/ $\mu\text{s}$  Slew Rate, 8 MHz Gain Bandwidth

**Low  $V_{OS}$ :** 10  $\mu\text{V}$

**Excellent CMRR:** 126 dB at  $V_{CM}$  of  $\pm 11\text{ V}$

**High Open-Loop Gain:** 1.8 Million

**Fits 725, OP07, 5534A Sockets**

**Available in Die Form**

### GENERAL DESCRIPTION

The OP27 precision operational amplifier combines the low offset and drift of the OP07 with both high speed and low noise. Offsets down to 25  $\mu\text{V}$  and drift of 0.6  $\mu\text{V}/^\circ\text{C}$  maximum make the OP27 ideal for precision instrumentation applications.

Exceptionally low noise,  $e_n = 3.5\text{ nV}/\sqrt{\text{Hz}}$ , at 10 Hz, a low 1/f noise corner frequency of 2.7 Hz, and high gain (1.8 million), allow accurate high-gain amplification of low-level signals. A gain-bandwidth product of 8 MHz and a 2.8 V/ $\mu\text{sec}$  slew rate provides excellent dynamic accuracy in high-speed, data-acquisition systems.


A low input bias current of  $\pm 10\text{ nA}$  is achieved by use of a bias-current-cancellation circuit. Over the military temperature range, this circuit typically holds  $I_B$  and  $I_{OS}$  to  $\pm 20\text{ nA}$  and 15 nA, respectively.

The output stage has good load driving capability. A guaranteed swing of  $\pm 10\text{ V}$  into 600  $\Omega$  and low output distortion make the OP27 an excellent choice for professional audio applications.

(Continued on page 7)

### PIN CONNECTIONS

**TO-99  
(J-Suffix)**



**8-Pin Hermetic DIP  
(Z-Suffix)**

**Epoxy Mini-DIP  
(P-Suffix)**

**8-Pin SO  
(S-Suffix)**

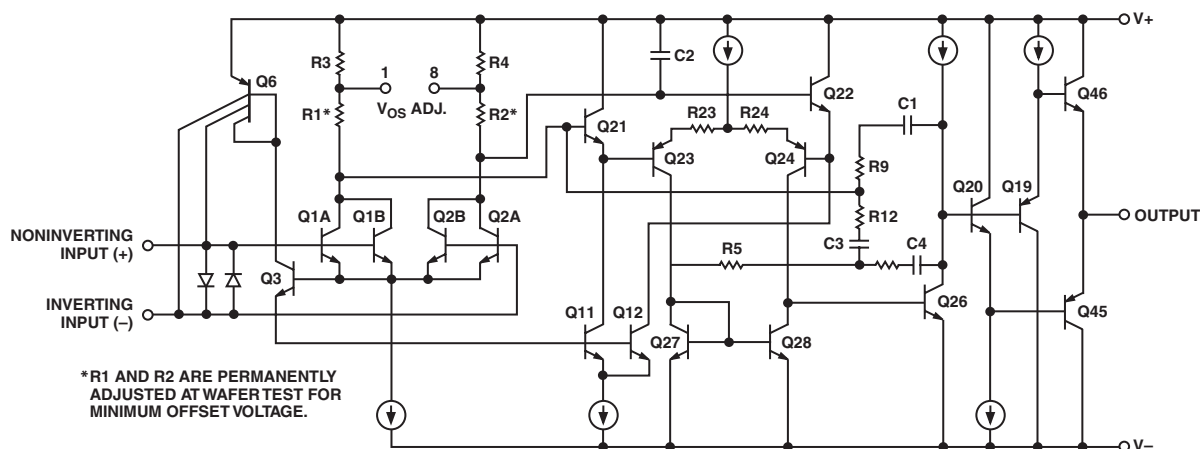



Figure 1. Simplified Schematic

REV. A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

# OP27—SPECIFICATIONS

## ELECTRICAL CHARACTERISTICS (@ $V_S = \pm 15\text{ V}$ , $T_A = 25^\circ\text{C}$ , unless otherwise noted.)

| Parameter                                                   | Symbol                 | Conditions                                                | OP27A/E    |            |     | OP27F      |            |     | OP27C/G    |            |     | Unit                         |
|-------------------------------------------------------------|------------------------|-----------------------------------------------------------|------------|------------|-----|------------|------------|-----|------------|------------|-----|------------------------------|
|                                                             |                        |                                                           | Min        | Typ        | Max | Min        | Typ        | Max | Min        | Typ        | Max |                              |
| INPUT OFFSET VOLTAGE <sup>1</sup>                           | $V_{OS}$               |                                                           | 10         | 25         |     | 20         | 60         |     | 30         | 100        |     | $\mu\text{V}$                |
| LONG-TERM $V_{OS}$ STABILITY <sup>2, 3</sup>                | $V_{OS}/\text{Time}$   |                                                           | 0.2        | 1.0        |     | 0.3        | 1.5        |     | 0.4        | 2.0        |     | $\mu\text{V}/\text{M}_O$     |
| INPUT OFFSET CURRENT                                        | $I_{OS}$               |                                                           | 7          | 35         |     | 9          | 50         |     | 12         | 75         |     | nA                           |
| INPUT BIAS CURRENT                                          | $I_B$                  |                                                           | $\pm 10$   | $\pm 40$   |     | $\pm 12$   | $\pm 55$   |     | $\pm 15$   | $\pm 80$   |     | nA                           |
| INPUT NOISE VOLTAGE <sup>3, 4</sup>                         | $e_{n\text{ p-p}}$     | 0.1 Hz to 10 Hz                                           | 0.08       | 0.18       |     | 0.08       | 0.18       |     | 0.09       | 0.25       |     | $\mu\text{V p-p}$            |
| INPUT NOISE Voltage Density <sup>3</sup>                    | $e_n$                  | $f_O = 10\text{ Hz}$                                      | 3.5        | 5.5        |     | 3.5        | 5.5        |     | 3.8        | 8.0        |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|                                                             |                        | $f_O = 30\text{ Hz}$                                      | 3.1        | 4.5        |     | 3.1        | 4.5        |     | 3.3        | 5.6        |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|                                                             |                        | $f_O = 1000\text{ Hz}$                                    | 3.0        | 3.8        |     | 3.0        | 3.8        |     | 3.2        | 4.5        |     | $\text{nV}/\sqrt{\text{Hz}}$ |
| INPUT NOISE Current Density <sup>3, 5</sup>                 | $i_n$                  | $f_O = 10\text{ Hz}$                                      | 1.7        | 4.0        |     | 1.7        | 4.0        |     | 1.7        |            |     | $\text{pA}/\sqrt{\text{Hz}}$ |
|                                                             |                        | $f_O = 30\text{ Hz}$                                      | 1.0        | 2.3        |     | 1.0        | 2.3        |     | 1.0        |            |     | $\text{pA}/\sqrt{\text{Hz}}$ |
|                                                             |                        | $f_O = 1000\text{ Hz}$                                    | 0.4        | 0.6        |     | 0.4        | 0.6        |     | 0.4        | 0.6        |     | $\text{pA}/\sqrt{\text{Hz}}$ |
| INPUT RESISTANCE Differential-Mode <sup>6</sup> Common-Mode | $R_{IN}$<br>$R_{INCM}$ |                                                           | 1.3        | 6          |     | 0.94       | 5          |     | 0.7        | 4          |     | $\text{M}\Omega$             |
|                                                             |                        |                                                           |            | 3          |     |            | 2.5        |     |            | 2          |     | $\text{G}\Omega$             |
| INPUT VOLTAGE RANGE                                         | IVR                    |                                                           | $\pm 11.0$ | $\pm 12.3$ |     | $\pm 11.0$ | $\pm 12.3$ |     | $\pm 11.0$ | $\pm 12.3$ |     | V                            |
| COMMON-MODE REJECTION RATIO                                 | CMRR                   | $V_{CM} = \pm 11\text{ V}$                                | 114        | 126        |     | 106        | 123        |     | 100        | 120        |     | dB                           |
| POWER SUPPLY REJECTION RATIO                                | PSRR                   | $V_S = \pm 4\text{ V}$<br>to $\pm 18\text{ V}$            | 1          | 10         |     | 1          | 10         |     | 2          | 20         |     | $\mu\text{V}/\text{V}$       |
| LARGE-SIGNAL VOLTAGE GAIN                                   | $A_{VO}$               | $R_L \geq 2\text{ k}\Omega$ ,<br>$V_O = \pm 10\text{ V}$  | 1000       | 1800       |     | 1000       | 1800       |     | 700        | 1500       |     | V/mV                         |
|                                                             |                        | $R_L \geq 600\text{ }\Omega$ ,<br>$V_O = \pm 10\text{ V}$ | 800        | 1500       |     | 800        | 1500       |     | 600        | 1500       |     | V/mV                         |
| OUTPUT VOLTAGE SWING                                        | $V_O$                  | $R_L \geq 2\text{ k}\Omega$                               | $\pm 12.0$ | $\pm 13.8$ |     | $\pm 12.0$ | $\pm 13.8$ |     | $\pm 11.5$ | $\pm 13.5$ |     | V                            |
|                                                             |                        | $R_L \geq 600\text{ }\Omega$                              | $\pm 10.0$ | $\pm 11.5$ |     | $\pm 10.0$ | $\pm 11.5$ |     | $\pm 10.0$ | $\pm 11.5$ |     | V                            |
| SLEW RATE <sup>7</sup>                                      | SR                     | $R_L \geq 2\text{ k}\Omega$                               | 1.7        | 2.8        |     | 1.7        | 2.8        |     | 1.7        | 2.8        |     | V/ $\mu\text{s}$             |
| GAIN BANDWIDTH PRODUCT <sup>7</sup>                         | GBW                    |                                                           | 5.0        | 8.0        |     | 5.0        | 8.0        |     | 5.0        | 8.0        |     | MHz                          |
| OPEN-LOOP OUTPUT RESISTANCE                                 | $R_O$                  | $V_O = 0$ , $I_O = 0$                                     | 70         |            |     | 70         |            |     | 70         |            |     | $\Omega$                     |
| POWER CONSUMPTION                                           | $P_d$                  | $V_O$                                                     | 90         | 140        |     | 90         | 140        |     | 100        | 170        |     | mW                           |
| OFFSET ADJUSTMENT RANGE                                     |                        | $R_P = 10\text{ k}\Omega$                                 | $\pm 4.0$  |            |     | $\pm 4.0$  |            |     | $\pm 4.0$  |            |     | mV                           |

### NOTES

<sup>1</sup>Input offset voltage measurements are performed ~ 0.5 seconds after application of power. A/E grades guaranteed fully warmed up.

<sup>2</sup>Long-term input offset voltage stability refers to the average trend line of  $V_{OS}$  versus. Time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in  $V_{OS}$  during the first 30 days are typically 2.5  $\mu\text{V}$ . Refer to typical performance curve.

<sup>3</sup>Sample tested.

<sup>4</sup>See test circuit and frequency response curve for 0.1 Hz to 10 Hz tester.

<sup>5</sup>See test circuit for current noise measurement.

<sup>6</sup>Guaranteed by input bias current.

<sup>7</sup>Guaranteed by design.

# **ELECTRICAL CHARACTERISTICS** (@ $V_S = \pm 15\text{ V}$ , $-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$ , unless otherwise noted.)

| Parameter                         | Symbol                                      | Conditions                                            | Min        | OP27A<br>Typ | Max      | Min        | OP27C<br>Typ | Max       | Unit                         |
|-----------------------------------|---------------------------------------------|-------------------------------------------------------|------------|--------------|----------|------------|--------------|-----------|------------------------------|
| INPUT OFFSET VOLTAGE <sup>1</sup> | $V_{OS}$                                    |                                                       |            | 30           | 60       |            | 70           | 300       | $\mu\text{V}$                |
| AVERAGE INPUT OFFSET DRIFT        | $\text{TCV}_{OS}^2$<br>$\text{TCV}_{OSn}^3$ |                                                       |            | 0.2          | 0.6      |            | 4            | 1.8       | $\mu\text{V}/^\circ\text{C}$ |
| INPUT OFFSET CURRENT              | $I_{OS}$                                    |                                                       |            | 15           | 50       |            | 30           | 135       | nA                           |
| INPUT BIAS CURRENT                | $I_B$                                       |                                                       |            | $\pm 20$     | $\pm 60$ |            | $\pm 35$     | $\pm 150$ | nA                           |
| INPUT VOLTAGE RANGE               | IVR                                         |                                                       | $\pm 10.3$ | $\pm 11.5$   |          | $\pm 10.2$ | $\pm 11.5$   |           | V                            |
| COMMON-MODE REJECTION RATIO       | CMRR                                        | $V_{CM} = \pm 10\text{ V}$                            | 108        | 122          |          | 94         | 118          |           | dB                           |
| POWER SUPPLY REJECTION RATIO      | PSRR                                        | $V_S = \pm 4.5\text{ V}$ to $\pm 18\text{ V}$         |            | 2            | 16       |            | 4            | 51        | $\mu\text{V}/\text{V}$       |
| LARGE-SIGNAL VOLTAGE GAIN         | $A_{VO}$                                    | $R_L \geq 2\text{ k}\Omega$ , $V_O = \pm 10\text{ V}$ | 600        | 1200         |          | 300        | 800          |           | V/mV                         |
| OUTPUT VOLTAGE SWING              | $V_O$                                       | $R_L \geq 2\text{ k}\Omega$                           | $\pm 11.5$ | $\pm 13.5$   |          | $\pm 10.5$ | $\pm 13.0$   |           | V                            |

## NOTES

<sup>1</sup>Input offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power. A/E grades guaranteed fully warmed up.

<sup>2</sup>The  $\text{TCV}_{OS}$  performance is within the specifications unnullled or when nullled with  $R_P = 8\text{ k}\Omega$  to  $20\text{ k}\Omega$ .  $\text{TCV}_{OS}$  is 100% tested for A/E grades, sample tested for C/F/G grades.

<sup>3</sup>Guaranteed by design.

# OP27

## ELECTRICAL CHARACTERISTICS

(@  $V_S = \pm 15\text{ V}$ ,  $-25^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$  for OP27J, OP27Z,  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$  for OP27EP, OP27FP, and  $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$  for OP27GP, OP27GS, unless otherwise noted.)


| Parameter                    | Symbol               | Conditions                                               | OP27E      |            |          | OP27F      |            |          | OP27G      |            |           | Unit                         |
|------------------------------|----------------------|----------------------------------------------------------|------------|------------|----------|------------|------------|----------|------------|------------|-----------|------------------------------|
|                              |                      |                                                          | Min        | Typ        | Max      | Min        | Typ        | Max      | Min        | Typ        | Max       |                              |
| INPUT ONSET VOLTAGE          | $V_{OS}$             |                                                          |            | 20         | 50       |            | 40         | 140      |            | 55         | 220       | $\mu\text{V}$                |
| AVERAGE INPUT OFFSET DRIFT   | $\text{TCV}_{OS}^1$  |                                                          |            | 0.2        | 0.6      |            | 0.3        | 1.3      |            | 0.4        | 1.8       | $\mu\text{V}/^\circ\text{C}$ |
|                              | $\text{TCV}_{OSn}^2$ |                                                          |            | 0.2        | 0.6      |            | 0.3        | 1.3      |            | 0.4        | 1.8       | $\mu\text{V}/^\circ\text{C}$ |
| INPUT OFFSET CURRENT         | $I_{OS}$             |                                                          |            | 10         | 50       |            | 14         | 85       |            | 20         | 135       | nA                           |
| INPUT BIAS CURRENT           | $I_B$                |                                                          |            | $\pm 14$   | $\pm 60$ |            | $\pm 18$   | $\pm 95$ |            | $\pm 25$   | $\pm 150$ | nA                           |
| INPUT VOLTAGE RANGE          | IVR                  |                                                          | $\pm 10.5$ | $\pm 11.8$ |          | $\pm 10.5$ | $\pm 11.8$ |          | $\pm 10.5$ | $\pm 11.8$ |           | V                            |
| COMMON-MODE REJECTION RATIO  | CMRR                 | $V_{CM} = \pm 10\text{ V}$                               | 110        | 124        |          | 102        | 121        |          | 96         | 118        |           | dB                           |
| POWER SUPPLY REJECTION RATIO | PSRR                 | $V_S = \pm 4.5\text{ V}$<br>to $\pm 18\text{ V}$         |            | 2          | 15       |            | 2          | 16       |            | 2          | 32        | $\mu\text{V}/\text{V}$       |
| LARGE-SIGNAL VOLTAGE GAIN    | $A_{VO}$             | $R_L \geq 2\text{ k}\Omega$ ,<br>$V_O = \pm 10\text{ V}$ | 750        | 1500       |          | 700        | 1300       |          | 450        | 1000       |           | V/mV                         |
| OUTPUT VOLTAGE SWING         | $V_O$                | $R_L \geq 2\text{ k}\Omega$                              | $\pm 11.7$ | $\pm 13.6$ |          | $\pm 11.4$ | $\pm 13.5$ |          | $\pm 11.0$ | $\pm 13.3$ |           | V                            |

### NOTES

<sup>1</sup>The  $\text{TCV}_{OS}$  performance is within the specifications unnullled or when nullled with  $R_P = 8\text{ k}\Omega$  to  $20\text{ k}\Omega$ .  $\text{TCV}_{OS}$  is 100% tested for A/E grades, sample tested for C/F/G grades.

<sup>2</sup>Guaranteed by design.

# DICE CHARACTERISTICS

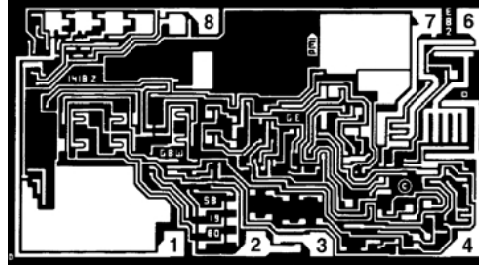

1. NULL
2. (-) INPUT
3. (+) INPUT
4. V-
6. OUTPUT
7. V+
8. NULL

DIE SIZE 0.109 × 0.055 INCH, 5995 SQ. MILS  
(2.77 × 1.40mm, 3.88 SQ. mm)

## WAFER TEST LIMITS (@ $V_S = \pm 15$ V, $T_A = 25^\circ\text{C}$ unless otherwise noted.)

| Parameter                   | Symbol   | Conditions                                 | OP27N<br>Limit | OP27G<br>Limit | OP27GR<br>Limit | Unit                |
|-----------------------------|----------|--------------------------------------------|----------------|----------------|-----------------|---------------------|
| INPUT OFFSET VOLTAGE*       | $V_{OS}$ |                                            | 35             | 60             | 100             | $\mu\text{V}$ Max   |
| INPUT OFFSET CURRENT        | $I_{OS}$ |                                            | 35             | 50             | 75              | nA Max              |
| INPUT BIAS CURRENT          | $I_B$    |                                            | $\pm 40$       | $\pm 55$       | $\pm 80$        | nA Max              |
| INPUT VOLTAGE RANGE         | IVR      |                                            | $\pm 11$       | $\pm 11$       | $\pm 11$        | V Min               |
| COMMON-MODE REJECTION RATIO | CMRR     | $V_{CM} = \text{IVR}$                      | 114            | 106            | 100             | dB Min              |
| POWER SUPPLY                | PSRR     | $V_S = \pm 4$ V to $\pm 18$ V              | 10             | 10             | 20              | $\mu\text{V/V}$ Max |
| LARGE-SIGNAL VOLTAGE GAIN   | $A_{VO}$ | $R_L \geq 2$ k $\Omega$ , $V_O = \pm 10$ V | 1000           | 1000           | 700             | V/mV Min            |
|                             | $A_{VO}$ | $R_L \geq 600$ $\Omega$ , $V_O = \pm 10$ V | 800            | 800            | 600             | V/mV Min            |
| OUTPUT VOLTAGE SWING        | $V_O$    | $R_L \geq 2$ k $\Omega$                    | $\pm 12.0$     | $\pm 12.0$     | +11.5           | V Min               |
|                             | $V_O$    | RL2600n                                    | $\pm 10.0$     | $\pm 10.0$     | $\pm 10.0$      | V Min               |
| POWER CONSUMPTION           | $P_d$    | $V_O = 0$                                  | 140            | 140            | 170             | mW Max              |

### NOTE

\*Electrical tests are performed at wafer probe to the limits shown. Due to variations in assembly methods and normal yield loss, yield after packaging is not guaranteed for standard product dice. Consult factory to negotiate specifications based on dice lot qualification through sample lot assembly and testing.

# OP27

## TYPICAL ELECTRICAL CHARACTERISTICS (@ $V_S = \pm 15\text{ V}$ , $T_A = 25^\circ\text{C}$ unless otherwise noted.)

| Parameter                              | Symbol                       | Conditions                                                            | OP27N<br>Typical | OP27G<br>Typical | OP27GR<br>Typical | Unit                         |
|----------------------------------------|------------------------------|-----------------------------------------------------------------------|------------------|------------------|-------------------|------------------------------|
| AVERAGE INPUT OFFSET<br>VOLTAGE DRIFT* | $TCV_{OS}$ or<br>$TCV_{OSn}$ | Nulled or Unnulled<br>$R_P = 8\text{ k}\Omega$ to $20\text{ k}\Omega$ | 0.2              | 0.3              | 0.4               | $\mu\text{V}/^\circ\text{C}$ |
| AVERAGE INPUT OFFSET<br>CURRENT DRIFT  | $TCI_{OS}$                   |                                                                       | 80               | 130              | 180               | $\text{pA}/^\circ\text{C}$   |
| AVERAGE INPUT BIAS<br>CURRENT DRIFT    | $TCI_B$                      |                                                                       | 100              | 160              | 200               | $\text{pA}/^\circ\text{C}$   |
| INPUT NOISE VOLTAGE<br>DENSITY         | $e_n$                        | $f_O = 10\text{ Hz}$                                                  | 3.5              | 3.5              | 3.8               | $\text{nV}/\sqrt{\text{Hz}}$ |
|                                        | $e_n$                        | $f_O = 30\text{ Hz}$                                                  | 3.1              | 3.1              | 3.3               | $\text{nV}/\sqrt{\text{Hz}}$ |
|                                        | $e_n$                        | $f_O = 1000\text{ Hz}$                                                | 3.0              | 3.0              | 3.2               | $\text{nV}/\sqrt{\text{Hz}}$ |
| INPUT NOISE CURRENT<br>DENSITY         | $i_n$                        | $f_O = 10\text{ Hz}$                                                  | 1.7              | 1.7              | 1.7               | $\text{pA}/\sqrt{\text{Hz}}$ |
|                                        | $i_n$                        | $f_O = 30\text{ Hz}$                                                  | 1.0              | 1.0              | 1.0               | $\text{pA}/\sqrt{\text{Hz}}$ |
|                                        | $i_n$                        | $f_O = 1000\text{ Hz}$                                                | 0.4              | 0.4              | 0.4               | $\text{pA}/\sqrt{\text{Hz}}$ |
| INPUT NOISE VOLTAGE<br>SLEW RATE       | $e_{np-p}$                   | 0.1 Hz to 10 Hz                                                       | 0.08             | 0.08             | 0.09              | $\mu\text{V p-p}$            |
|                                        | SR                           | $R_L \geq 2\text{ k}\Omega$                                           | 2.8              | 2.8              | 2.8               | $\text{V}/\mu\text{s}$       |
| GAIN BANDWIDTH<br>PRODUCT              | GBW                          |                                                                       | 8                | 8                | 8                 | MHz                          |

### NOTE

\*Input offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power.

(Continued from page 1)

PSRR and CMRR exceed 120 dB. These characteristics, coupled with long-term drift of 0.2  $\mu\text{V}/\text{month}$ , allow the circuit designer to achieve performance levels previously attained only by discrete designs.

Low-cost, high-volume production of OP27 is achieved by using an on-chip Zener zap-trimming network. This reliable and stable offset trimming scheme has proved its effectiveness over many years of production history.

The OP27 provides excellent performance in low-noise, high-accuracy amplification of low-level signals. Applications include stable integrators, precision summing amplifiers, precision voltage-threshold detectors, comparators, and professional audio circuits such as tape-head and microphone preamplifiers.

The OP27 is a direct replacement for 725, OP06, OP07, and OP45 amplifiers; 741 types may be directly replaced by removing the 741's nulling potentiometer.

## ABSOLUTE MAXIMUM RATINGS<sup>4</sup>

|                                            |                                                 |
|--------------------------------------------|-------------------------------------------------|
| Supply Voltage                             | $\pm 22\text{ V}$                               |
| Input Voltage <sup>1</sup>                 | $\pm 22\text{ V}$                               |
| Output Short-Circuit Duration              | Indefinite                                      |
| Differential Input Voltage <sup>2</sup>    | $\pm 0.7\text{ V}$                              |
| Differential Input Current <sup>2</sup>    | $\pm 25\text{ mA}$                              |
| Storage Temperature Range                  | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Operating Temperature Range                |                                                 |
| OP27A, OP27C (J, Z)                        | $-55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ |
| OP27E, OP27F (J, Z)                        | $-25^{\circ}\text{C}$ to $+85^{\circ}\text{C}$  |
| OP27E, OP27F (P)                           | $0^{\circ}\text{C}$ to $70^{\circ}\text{C}$     |
| OP27G (P, S, J, Z)                         | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$  |
| Lead Temperature Range (Soldering, 60 sec) | $300^{\circ}\text{C}$                           |
| Junction Temperature                       | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |

| Package Type            | $\theta_{JA}$ <sup>3</sup> | $\theta_{JC}$ | Unit                        |
|-------------------------|----------------------------|---------------|-----------------------------|
| TO 99 (J)               | 150                        | 18            | $^{\circ}\text{C}/\text{W}$ |
| 8-Lead Hermetic DIP (Z) | 148                        | 16            | $^{\circ}\text{C}/\text{W}$ |
| 8-Lead Plastic DIP (P)  | 103                        | 43            | $^{\circ}\text{C}/\text{W}$ |
| 20-Contact LCC (RC)     | 98                         | 38            | $^{\circ}\text{C}/\text{W}$ |
| 8-Lead SO (S)           | 158                        | 43            | $^{\circ}\text{C}/\text{W}$ |

### NOTES

<sup>1</sup>For supply voltages less than  $\pm 22\text{ V}$ , the absolute maximum input voltage is equal to the supply voltage.

<sup>2</sup>The OP27's inputs are protected by back-to-back diodes. Current limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds  $\pm 0.7\text{ V}$ , the input current should be limited to 25 mA.

<sup>3</sup> $\theta_{JA}$  is specified for worst-case mounting conditions, i.e.,  $\theta_{JA}$  is specified for device in socket for TO, Cerdip, and P-DIP packages;  $\theta_{JA}$  is specified for device soldered to printed circuit board for SO package.

<sup>4</sup>Absolute Maximum Ratings apply to both DICE and packaged parts, unless otherwise noted.

## ORDERING INFORMATION<sup>1</sup>

| $T_A = 25^{\circ}\text{C}$<br>$V_{OS\text{ Max}}$<br>( $\mu\text{V}$ ) | Package                |                     |                     | Operating Temperature Range |
|------------------------------------------------------------------------|------------------------|---------------------|---------------------|-----------------------------|
|                                                                        | TO-99                  | CERDIP 8-Lead       | Plastic 8-Lead      |                             |
| 25                                                                     | OP27AJ <sup>2, 3</sup> | OP27AZ <sup>2</sup> |                     | MIL                         |
| 25                                                                     | OP27EJ <sup>2, 3</sup> | OP27EZ              | OP27EP              | IND/COM                     |
| 60                                                                     |                        |                     | OP27FP <sup>3</sup> | IND/COM                     |
| 100                                                                    |                        | OP27CZ <sup>3</sup> |                     | MIL                         |
| 100                                                                    | OP27GJ                 | OP27GZ              | OP27GP              | XIND                        |
| 100                                                                    |                        |                     | OP27GS <sup>4</sup> | XIND                        |

### NOTES

<sup>1</sup>Burn-in is available on commercial and industrial temperature range parts in CERDIP, plastic DIP, and TO-can packages.

<sup>2</sup>For devices processed in total compliance to MIL-STD-883, add /883 after part number. Consult factory for 883 data sheet.

<sup>3</sup>Not for new design; obsolete April 2002.


<sup>4</sup>For availability and burn-in information on SO and PLCC packages, contact your local sales office.

## CAUTION


ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the OP27 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high-energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.




# OP27—Typical Performance Characteristics

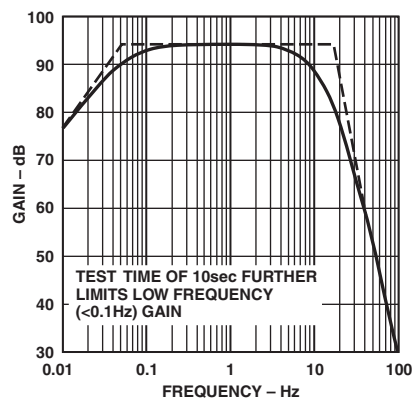


TPC 1. 0.1 Hz to 10 Hz<sub>p-p</sub> Noise Tester Frequency Response

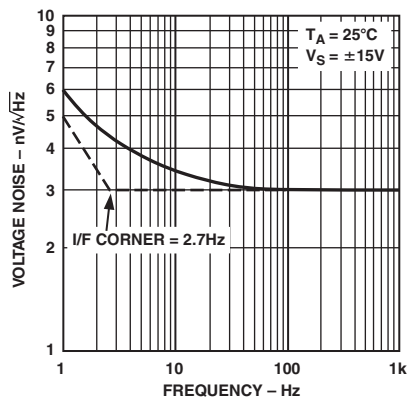


TPC 2. Voltage Noise Density vs. Frequency

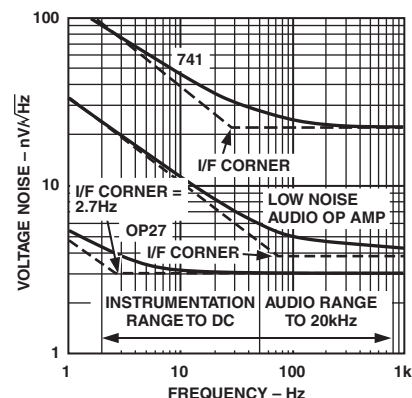


TPC 3. A Comparison of Op Amp Voltage Noise Spectra

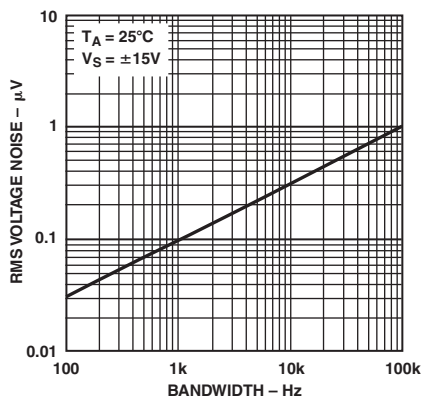


TPC 4. Input Wideband Voltage Noise vs. Bandwidth (0.1 Hz to Frequency Indicated)

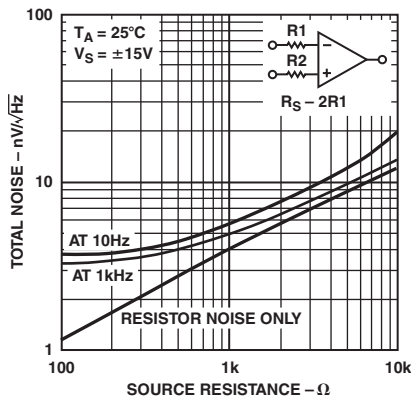


TPC 5. Total Noise vs. Sourced Resistance

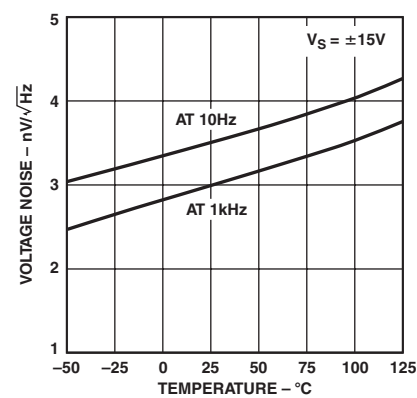


TPC 6. Voltage Noise Density vs. Temperature

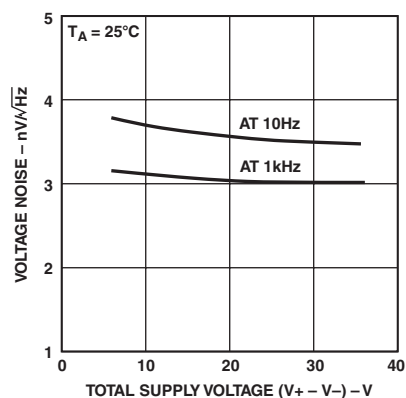


TPC 7. Voltage Noise Density vs. Supply Voltage

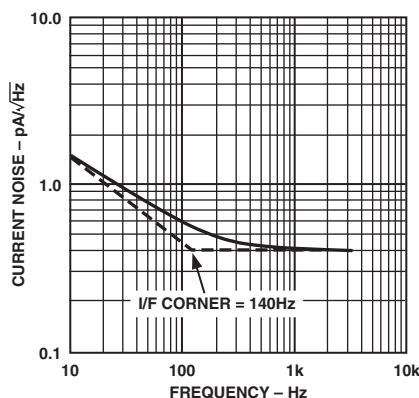


TPC 8. Current Noise Density vs. Frequency

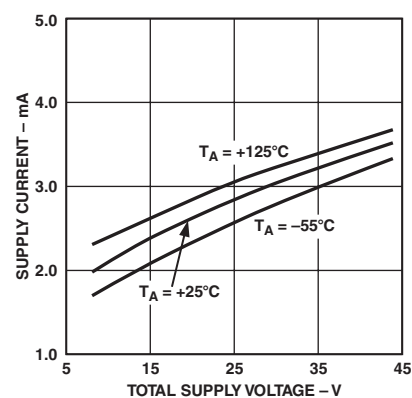


TPC 9. Supply Current vs. Supply Voltage

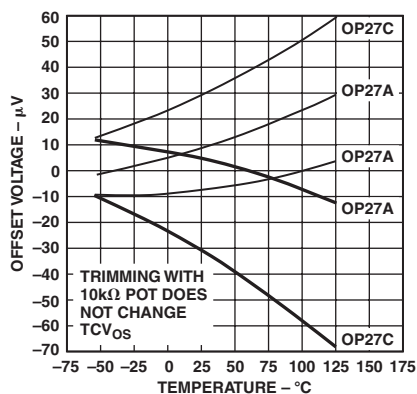


TPC 10. Offset Voltage Drift of Five Representative Units vs. Temperature

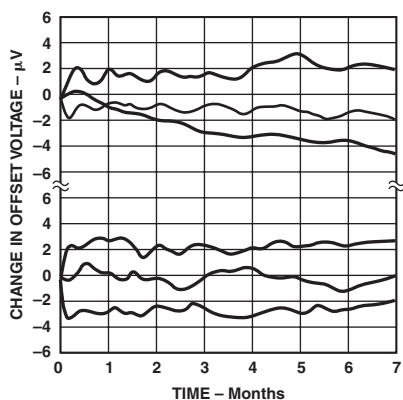


TPC 11. Long-Term Offset Voltage Drift of Six Representative Units

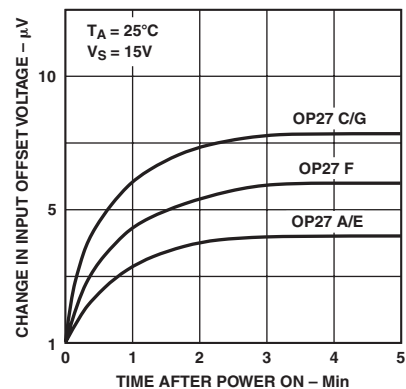


TPC 12. Warm-Up Offset Voltage Drift

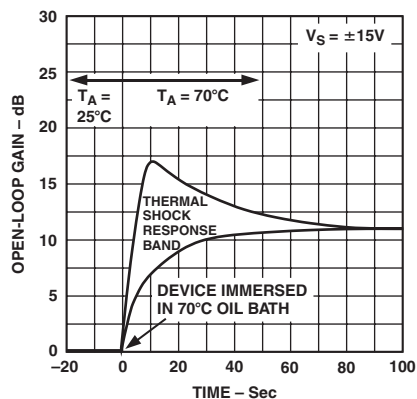


TPC 13. Offset Voltage Change Due to Thermal Shock

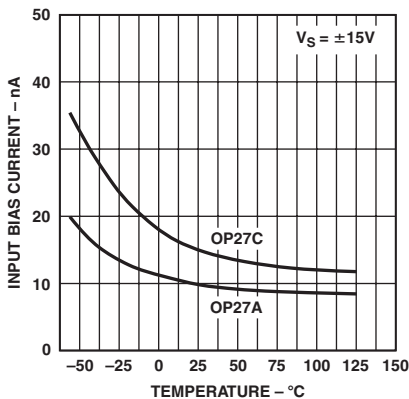


TPC 14. Input Bias Current vs. Temperature

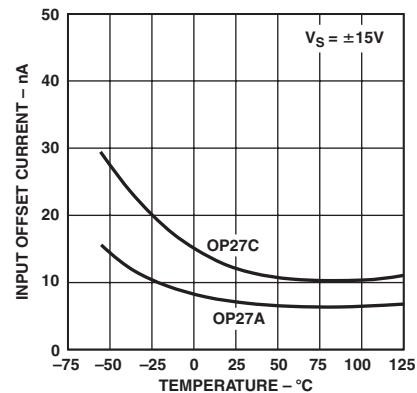


TPC 15. Input Offset Current vs. Temperature

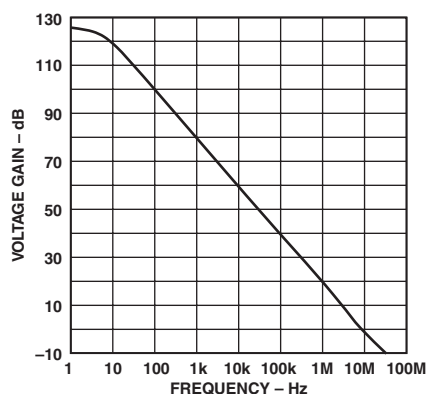

TPC 16. Open-Loop Gain vs. Frequency

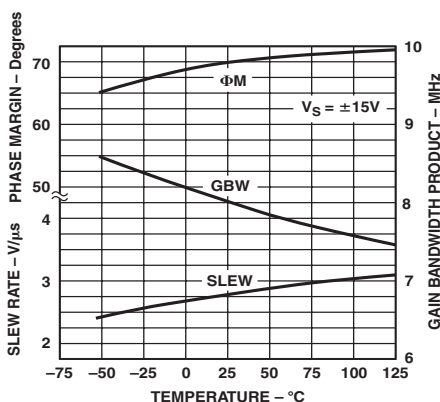


TPC 17. Slew Rate, Gain-Bandwidth Product, Phase Margin vs. Temperature

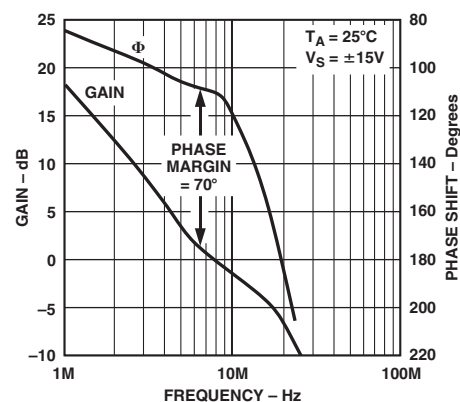


TPC 18. Gain, Phase Shift vs. Frequency


# OP27

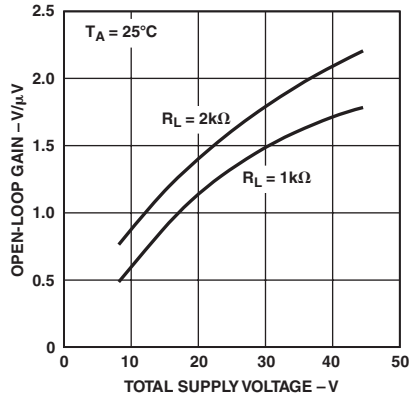


TPC 19. Open-Loop Voltage Gain vs. Supply Voltage

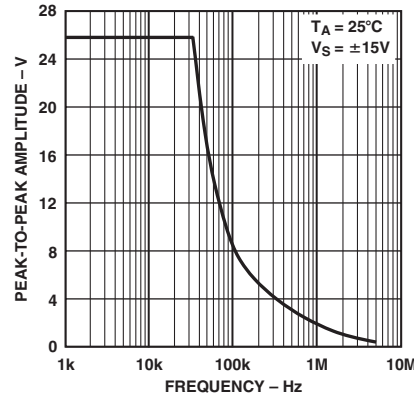


TPC 20. Maximum Output Swing vs. Frequency

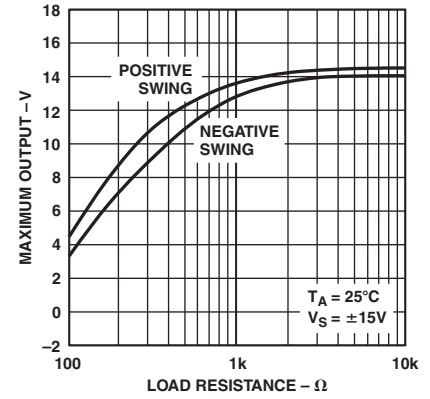


TPC 21. Maximum Output Voltage vs. Load Resistance

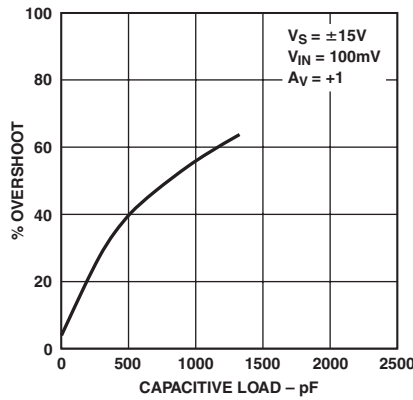


TPC 22. Small-Signal Overshoot vs. Capacitive Load

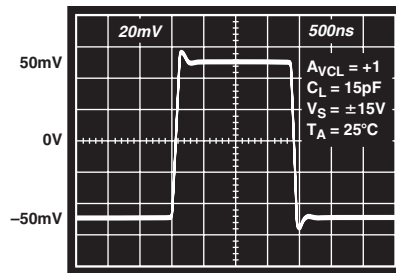


TPC 23. Small-Signal Transient Response

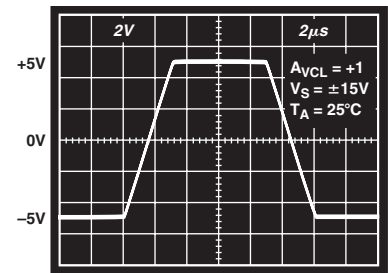


TPC 24. Large-Signal Transient Response

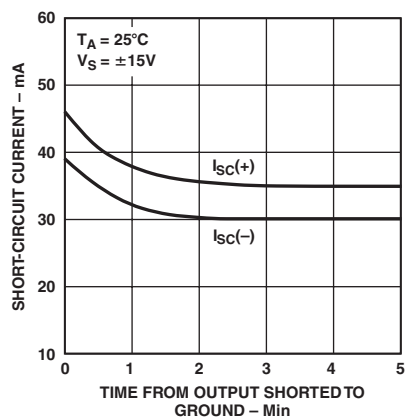


TPC 25. Short-Circuit Current vs. Time

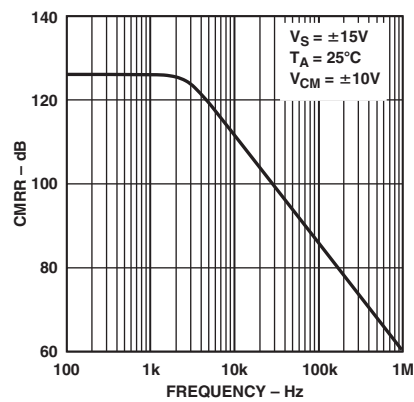


TPC 26. CMRR vs. Frequency

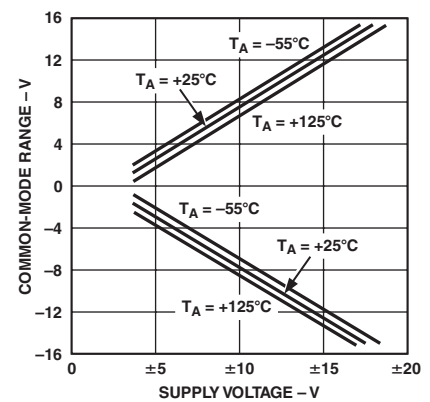


TPC 27. Common-Mode Input Range vs. Supply Voltage

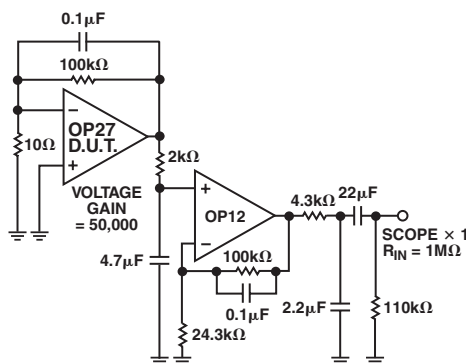


TPC 28. Voltage Noise Test Circuit (0.1 Hz to 10 Hz)

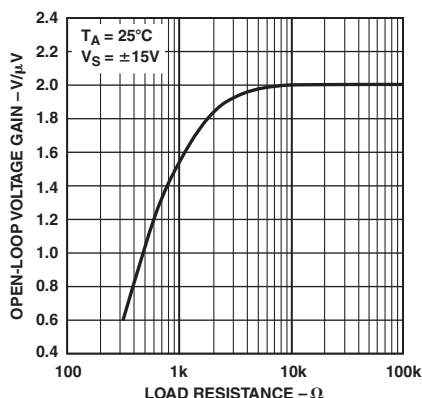

TPC 29. Open-Loop Voltage Gain vs. Load Resistance

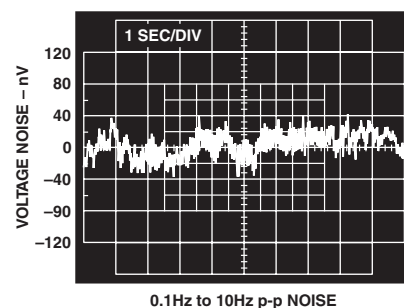

TPC 30. Low-Frequency Noise

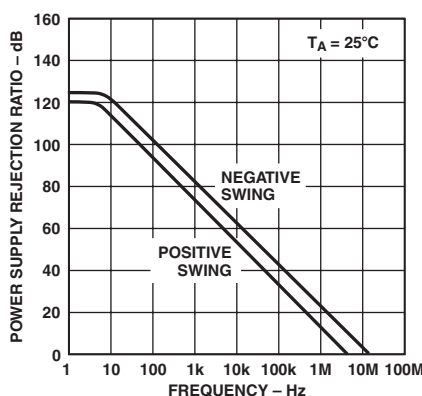

TPC 31. PSRR vs. Frequency

## APPLICATION INFORMATION

OP27 series units may be inserted directly into 725 and OP07 sockets with or without removal of external compensation or nulling components. Additionally, the OP27 may be fitted to unnullled 741-type sockets; however, if conventional 741 nulling circuitry is in use, it should be modified or removed to ensure correct OP27 operation. OP27 offset voltage may be nulled to zero (or another desired setting) using a potentiometer (see Offset Nulling Circuit).

The OP27 provides stable operation with load capacitances of up to 2000 pF and  $\pm 10$  V swings; larger capacitances should be decoupled with a 50  $\Omega$  resistor inside the feedback loop. The OP27 is unity-gain stable.

Thermoelectric voltages generated by dissimilar metals at the input terminal contacts can degrade the drift performance. Best operation will be obtained when both input contacts are maintained at the same temperature.

## OFFSET VOLTAGE ADJUSTMENT

The input offset voltage of the OP27 is trimmed at wafer level. However, if further adjustment of  $V_{OS}$  is necessary, a 10 k $\Omega$  trim potentiometer can be used.  $TCV_{OS}$  is not degraded (see Offset Nulling Circuit). Other potentiometer values from 1 k $\Omega$  to 1 M $\Omega$  can be used with a slight degradation (0.1  $\mu V/^{\circ}C$  to 0.2  $\mu V/^{\circ}C$ ) of  $TCV_{OS}$ . Trimming to a value other than zero creates a drift of

approximately  $(V_{OS}/300) \mu V/^{\circ}C$ . For example, the change in  $TCV_{OS}$  will be 0.33  $\mu V/^{\circ}C$  if  $V_{OS}$  is adjusted to 100  $\mu V$ . The offset voltage adjustment range with a 10 k $\Omega$  potentiometer is  $\pm 4$  mV. If smaller adjustment range is required, the nulling sensitivity can be reduced by using a smaller pot in conjunction with fixed resistors. For example, the network below will have a  $\pm 280 \mu V$  adjustment range.




Figure 2.

## NOISE MEASUREMENTS

To measure the 80 nV peak-to-peak noise specification of the OP27 in the 0.1 Hz to 10 Hz range, the following precautions must be observed:

1. The device must be warmed up for at least five minutes. As shown in the warm-up drift curve, the offset voltage typically changes 4  $\mu V$  due to increasing chip temperature after power-up. In the 10-second measurement interval, these temperature-induced effects can exceed tens-of-nanovolts.
2. For similar reasons, the device has to be well-shielded from air currents. Shielding minimizes thermocouple effects.

## OP27

3. Sudden motion in the vicinity of the device can also “feedthrough” to increase the observed noise.
4. The test time to measure 0.1 Hz to 10 Hz noise should not exceed 10 seconds. As shown in the noise-tester frequency response curve, the 0.1 Hz corner is defined by only one zero. The test time of 10 seconds acts as an additional zero to eliminate noise contributions from the frequency band below 0.1 Hz.
5. A noise-voltage-density test is recommended when measuring noise on a large number of units. A 10 Hz noise-voltage-density measurement will correlate well with a 0.1 Hz to 10 Hz peak-to-peak noise reading, since both results are determined by the white noise and the location of the 1/f corner frequency.

### UNITY-GAIN BUFFER APPLICATIONS

When  $R_f \leq 100 \Omega$  and the input is driven with a fast, large signal pulse ( $>1 \text{ V}$ ), the output waveform will look as shown in the pulsed operation diagram (Figure 3).

During the fast feedthrough-like portion of the output, the input protection diodes effectively short the output to the input and a current, limited only by the output short-circuit protection, will be drawn by the signal generator. With  $R_f \geq 500 \Omega$ , the output is capable of handling the current requirements ( $I_L \leq 20 \text{ mA}$  at  $10 \text{ V}$ ); the amplifier will stay in its active mode and a smooth transition will occur.

When  $R_f > 2 \text{ k}\Omega$ , a pole will be created with  $R_f$  and the amplifier's input capacitance (8 pF) that creates additional phase shift and reduces phase margin. A small capacitor (20 pF to 50 pF) in parallel with  $R_f$  will eliminate this problem.

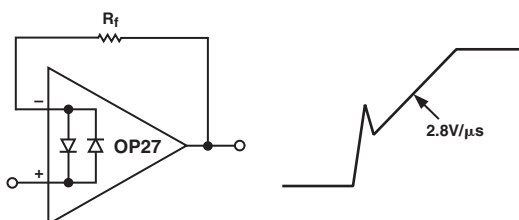


Figure 3. Pulsed Operation

### COMMENTS ON NOISE

The OP27 is a very low-noise monolithic op amp. The outstanding input voltage noise characteristics of the OP27 are achieved mainly by operating the input stage at a high quiescent current. The input bias and offset currents, which would normally increase, are held to reasonable values by the input bias-current cancellation circuit. The OP27A/E has  $I_B$  and  $I_{OS}$  of only  $\pm 40 \text{ nA}$  and  $35 \text{ nA}$  at  $25^\circ\text{C}$  respectively. This is particularly important when the input has a high source resistance. In addition, many audio amplifier designers prefer to use direct coupling. The high  $I_B$ ,  $V_{OS}$ , and  $TCV_{OS}$  of previous designs have made direct coupling difficult, if not impossible, to use.

Voltage noise is inversely proportional to the square root of bias current, but current noise is proportional to the square root of bias current. The OP27's noise advantage disappears when high source-resistors are used. Figures 4, 5, and 6 compare OP27's observed total noise with the noise performance of other devices in different circuit applications.

$$\text{Total Noise} = \left[ \left( \text{Voltage Noise} \right)^2 + \left( \text{Current Noise} \times R_S \right)^2 + \left( \text{Resistor Noise} \right)^2 \right]^{1/2}$$

Figure 4 shows noise versus source-resistance at 1000 Hz. The same plot applies to wideband noise. To use this plot, multiply the vertical scale by the square root of the bandwidth.

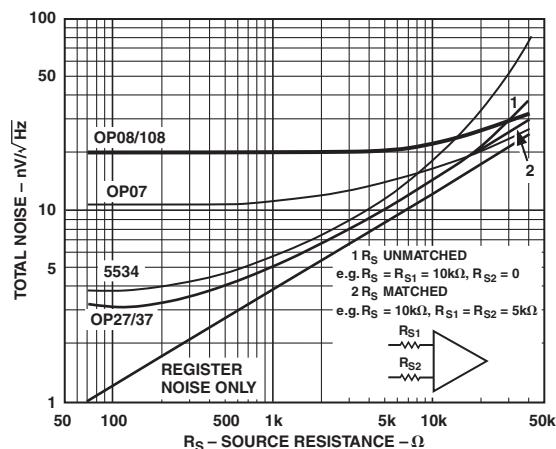


Figure 4. Noise vs. Source Resistance (Including Resistor Noise) at 1000 Hz

At  $R_S < 1 \text{ k}\Omega$ , the OP27's low voltage noise is maintained. With  $R_S < 1 \text{ k}\Omega$ , total noise increases, but is dominated by the resistor noise rather than current or voltage noise. It is only beyond  $R_S$  of  $20 \text{ k}\Omega$  that current noise starts to dominate. The argument can be made that current noise is not important for applications with low to moderate source resistances. The crossover between the OP27, OP07, and OP08 noise occurs in the  $15 \text{ k}\Omega$  to  $40 \text{ k}\Omega$  region.

Figure 5 shows the 0.1 Hz to 10 Hz peak-to-peak noise. Here the picture is less favorable; resistor noise is negligible and current noise becomes important because it is inversely proportional to the square root of frequency. The crossover with the OP07 occurs in the  $3 \text{ k}\Omega$  to  $5 \text{ k}\Omega$  range depending on whether balanced or unbalanced source resistors are used (at  $3 \text{ k}\Omega$  the  $I_B$  and  $I_{OS}$  error also can be three times the  $V_{OS}$  spec.).

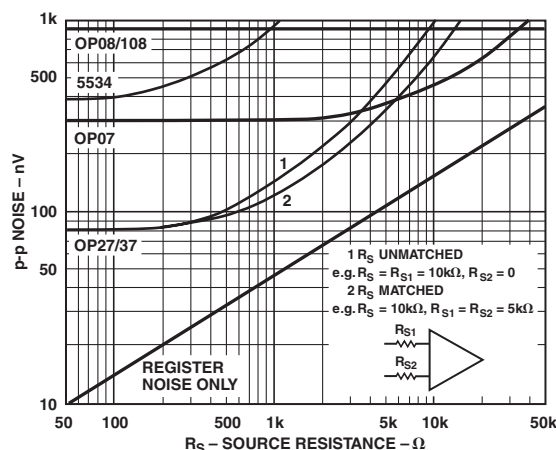


Figure 5. Peak-to-Peak Noise (0.1 Hz to 10 Hz) as Source Resistance (Includes Resistor Noise)

Therefore, for low-frequency applications, the OP07 is better than the OP27/OP37 when  $R_S > 3 \text{ k}\Omega$ . The only exception is when gain error is important. Figure 6 illustrates the 10 Hz noise. As expected, the results are between the previous two figures.

For reference, typical source resistances of some signal sources are listed in Table I.


**Table I.**

| Device                                   | Source Impedance | Comments                                                                                                               |
|------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------|
| Strain Gauge                             | <500 $\Omega$    | Typically used in low-frequency applications.                                                                          |
| Magnetic Tapehead                        | <1500 $\Omega$   | Low is very important to reduce self-magnetization problems when direct coupling is used. OP27 $I_B$ can be neglected. |
| Magnetic Phonograph Cartridges           | <1500 $\Omega$   | Similar need for low $I_B$ in direct coupled applications. OP27 will not introduce any self-magnetization problem.     |
| Linear Variable Differential Transformer | <1500 $\Omega$   | Used in rugged servo-feedback applications. Bandwidth of interest is 400 Hz to 5 kHz.                                  |

**Open-Loop Gain**

| Frequency at | OP07   | OP27   | OP37   |
|--------------|--------|--------|--------|
| 3 Hz         | 100 dB | 124 dB | 125 dB |
| 10 Hz        | 100 dB | 120 dB | 125 dB |
| 30 Hz        | 90 dB  | 110 dB | 124 dB |

For further information regarding noise calculations, see "Minimization of Noise in Op Amp Applications," Application Note AN-15.

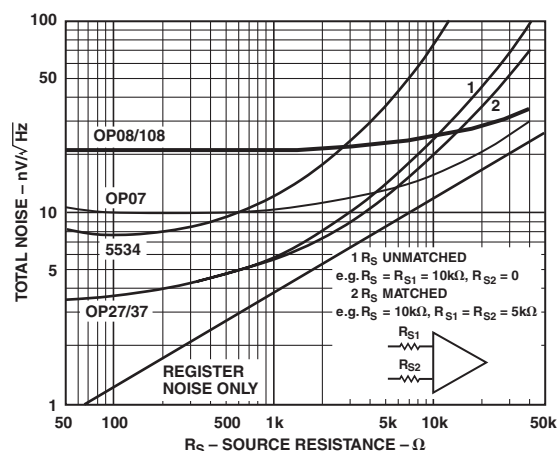


**Figure 6. 10 Hz Noise vs. Source Resistance (Includes Resistor Noise)**

## AUDIO APPLICATIONS

*The following applications information has been abstracted from a PMI article in the 12/20/80 issue of Electronic Design magazine and updated.*

Figure 7 is an example of a phono pre-amplifier circuit using the OP27 for A1; R1-R2-C1-C2 form a very accurate RIAA network with standard component values. The popular method to accomplish RIAA phono equalization is to employ frequency-dependent feedback around a high-quality gain block. Properly chosen, an RC network can provide the three necessary time constants of 3180, 318, and 75  $\mu\text{s}$ .<sup>1</sup>

For initial equalization accuracy and stability, precision metal film resistors and film capacitors of polystyrene or polypropylene are recommended since they have low voltage coefficients, dissipation factors, and dielectric absorption.<sup>4</sup> (High-K ceramic capacitors should be avoided here, though low-K ceramics—such as NPO types, which have excellent dissipation factors and somewhat lower dielectric absorption—can be considered for small values.)

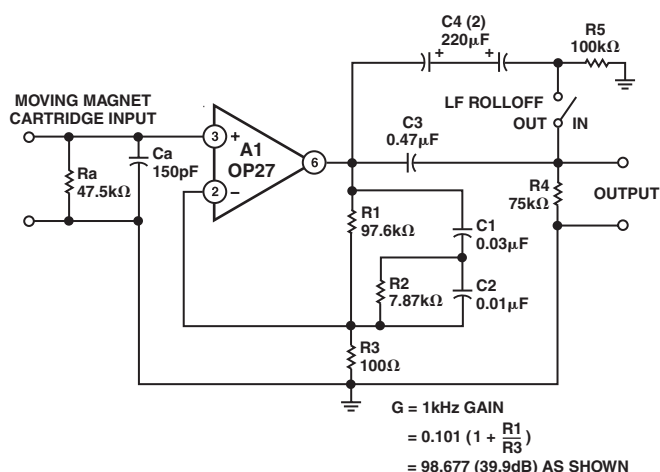

**Figure 7.**

The OP27 brings a 3.2  $\text{nV}/\sqrt{\text{Hz}}$  voltage noise and 0.45  $\text{pA}/\sqrt{\text{Hz}}$  current noise to this circuit. To minimize noise from other sources, R3 is set to a value of 100  $\Omega$ , which generates a voltage noise of 1.3  $\text{nV}/\sqrt{\text{Hz}}$ . The noise increases the 3.2  $\text{nV}/\sqrt{\text{Hz}}$  of the amplifier by only 0.7 dB. With a 1  $\text{k}\Omega$  source, the circuit noise measures 63 dB below a 1 mV reference level, unweighted, in a 20 kHz noise bandwidth.

Gain (G) of the circuit at 1 kHz can be calculated by the expression:

$$G = 0.101 \left( 1 + \frac{R1}{R3} \right)$$

For the values shown, the gain is just under 100 (or 40 dB). Lower gains can be accommodated by increasing R3, but gains higher than 40 dB will show more equalization errors because of the 8 MHz gain-bandwidth of the OP27.

This circuit is capable of very low distortion over its entire range, generally below 0.01% at levels up to 7 V rms. At 3 V output levels, it will produce less than 0.03% total harmonic distortion at frequencies up to 20 kHz.

Capacitor C3 and resistor R4 form a simple -6 dB-per-octave rumble filter, with a corner at 22 Hz. As an option, the switch-selected shunt capacitor C4, a nonpolarized electrolytic, bypasses the low-frequency rolloff. Placing the rumble filter's high-pass action after the preamp has the desirable result of discriminating

## OP27

against the RIAA-amplified low-frequency noise components and pickup-produced low-frequency disturbances.

A preamplifier for NAB tape playback is similar to an RIAA phono preamp, though more gain is typically demanded, along with equalization requiring a heavy low-frequency boost. The circuit in Figure 7 can be readily modified for tape use, as shown by Figure 8.

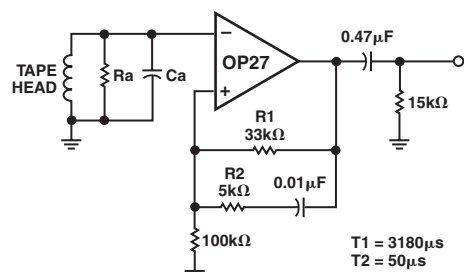


Figure 8.

While the tape-equalization requirement has a flat high-frequency gain above 3 kHz ( $T_2 = 50 \mu s$ ), the amplifier need not be stabilized for unity gain. The decompensated OP37 provides a greater bandwidth and slew rate. For many applications, the idealized time constants shown may require trimming of R1 and R2 to optimize frequency response for nonideal tapehead performance and other factors.<sup>5</sup>

The network values of the configuration yield a 50 dB gain at 1 kHz, and the dc gain is greater than 70 dB. Thus, the worst-case output offset is just over 500 mV. A single 0.47  $\mu F$  output capacitor can block this level without affecting the dynamic range.

The tapehead can be coupled directly to the amplifier input, since the worst-case bias current of 80 nA with a 400 mH, 100  $\mu$  inch head (such as the PRB2H7K) will not be troublesome.

One potential tapehead problem is presented by amplifier bias-current transients which can magnetize a head. The OP27 and OP37 are free of bias-current transients upon power-up or power-down. However, it is always advantageous to control the speed of power supply rise and fall, to eliminate transients.

In addition, the dc resistance of the head should be carefully controlled, and preferably below 1 k $\Omega$ . For this configuration, the bias-current-induced offset voltage can be greater than the 100pV maximum offset if the head resistance is not sufficiently controlled.

A simple, but effective, fixed-gain transformerless microphone preamp (Figure 9) amplifies differential signals from low impedance microphones by 50 dB, and has an input impedance of 2 k $\Omega$ . Because of the high working gain of the circuit, an OP37 helps to preserve bandwidth, which will be 110 kHz. As the OP37 is a decompensated device (minimum stable gain of 5), a dummy resistor,  $R_p$ , may be necessary, if the microphone is to be unplugged. Otherwise the 100% feedback from the open input may cause the amplifier to oscillate.

Common-mode input-noise rejection will depend upon the match of the bridge-resistor ratios. Either close-tolerance (0.1%) types should be used, or R4 should be trimmed for best CMRR. All resistors should be metal film types for best stability and low noise.

Noise performance of this circuit is limited more by the input resistors R1 and R2 than by the op amp, as R1 and R2 each generate a  $4 \text{ nV}/\sqrt{\text{Hz}}$  noise, while the op amp generates a  $3.2 \text{ nV}/\sqrt{\text{Hz}}$

noise. The rms sum of these predominant noise sources will be about  $6 \text{ nV}/\sqrt{\text{Hz}}$ , equivalent to 0.9  $\mu V$  in a 20 kHz noise bandwidth, or nearly 61 dB below a 1 mV input signal. Measurements confirm this predicted performance.

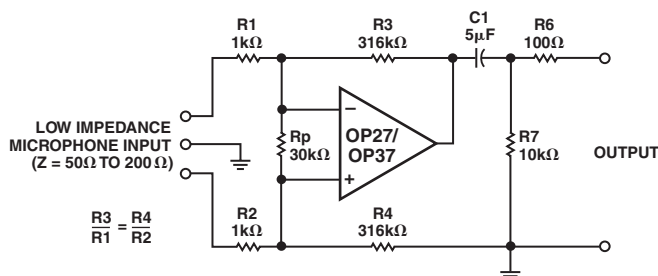


Figure 9.

For applications demanding appreciably lower noise, a high quality microphone transformer-coupled preamp (Figure 10) incorporates the internally compensated OP27. T1 is a JE-115K-E 150  $\Omega$ /15 k $\Omega$  transformer which provides an optimum source resistance for the OP27 device. The circuit has an overall gain of 40 dB, the product of the transformer's voltage setup and the op amp's voltage gain.

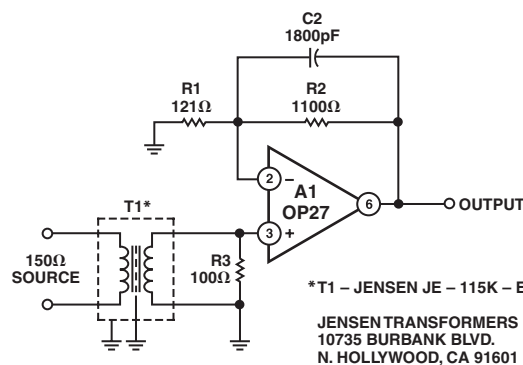


Figure 10.

Gain may be trimmed to other levels, if desired, by adjusting R2 or R1. Because of the low offset voltage of the OP27, the output offset of this circuit will be very low, 1.7 mV or less, for a 40 dB gain. The typical output blocking capacitor can be eliminated in such cases, but is desirable for higher gains to eliminate switching transients.




Figure 11. Burn-In Circuit

Capacitor C2 and resistor R2 form a 2  $\mu s$  time constant in this circuit, as recommended for optimum transient response by the transformer manufacturer. With C2 in use, A1 must have unity-gain stability. For situations where the 2  $\mu s$  time constant is not necessary, C2 can be deleted, allowing the faster OP37 to be employed.

Some comment on noise is appropriate to understand the capability of this circuit. A 150  $\Omega$  resistor and R1 and R2 gain resistors connected to a noiseless amplifier will generate 220 nV of noise in a 20 kHz bandwidth, or 73 dB below a 1 mV reference level. Any practical amplifier can only approach this noise level; it can never exceed it. With the OP27 and T1 specified, the additional noise degradation will be close to 3.6 dB (or -69.5 referenced to 1 mV).

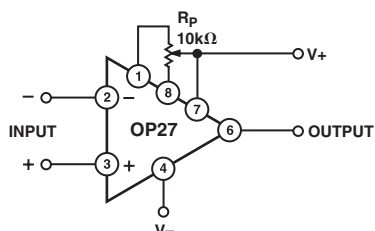


Figure 12. Offset Nulling Circuit


## References

1. Lipshitz, S.R., "On RIAA Equalization Networks," JAES, Vol. 27, June 1979, p. 458-481.
2. Jung, W.G., *IC Op Amp Cookbook*, 2nd. Ed., H.W. Sams and Company, 1980.
3. Jung, W.G., *Audio IC Op Amp Applications*, 2nd. Ed., H.W. Sams and Company, 1978.
4. Jung, W.G., and Marsh, R.M., "Picking Capacitors," *Audio*, February and March, 1980.
5. Ojala, M., "Feedback-Generated Phase Nonlinearity in Audio Amplifiers," London AES Convention, March 1980, preprint 1976.
6. Stout, D.F., and Kautman, M., *Handbook of Operational Amplifier Circuit Design*, New York, McGraw-Hill, 1976.


## OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).


### 8-Lead PDIP Package (P-Suffix) (N-8)

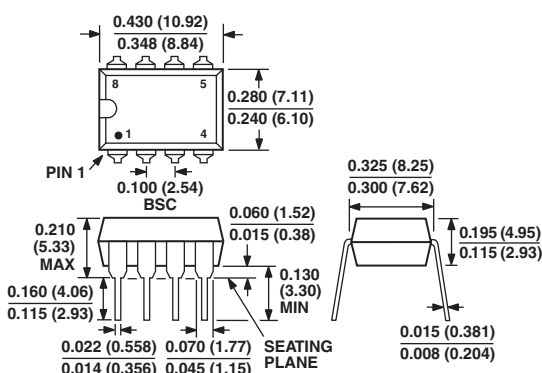


### 8-Lead SOIC Package (S-Suffix) (R-8)

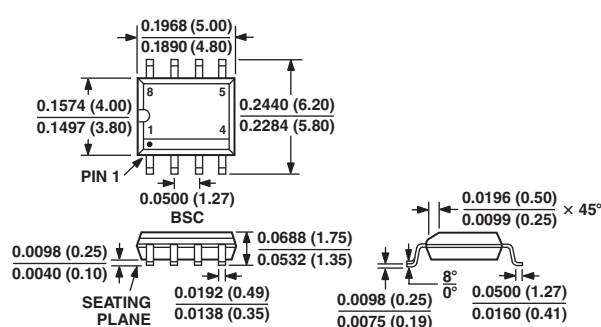

### 8-Lead CERDIP Package (Z-Suffix) (Q-8)

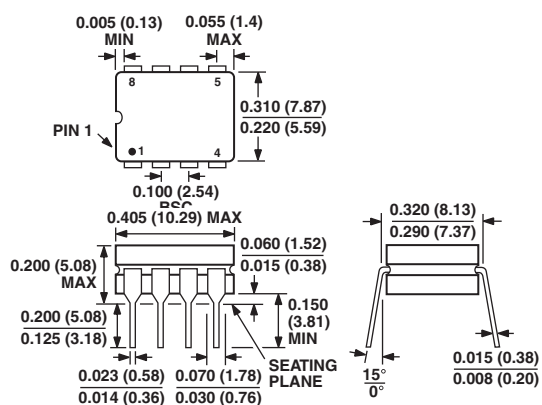

### 8-Pin (TO-99) Header Package (J-Suffix) (H-8A)

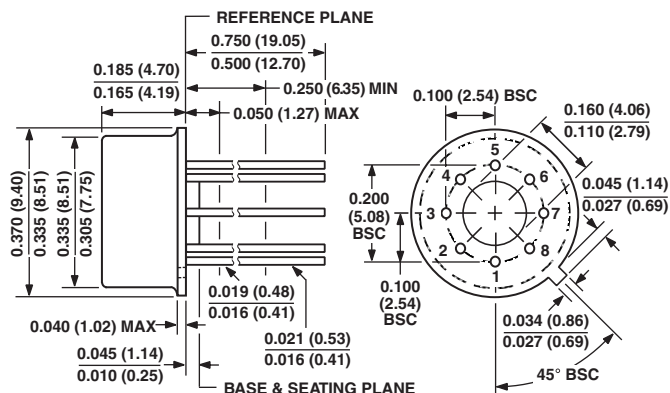

# Revision History

| Location                                              | Page |
|-------------------------------------------------------|------|
| <b>9/01—Data Sheet changed from REV. 0 to REV. A.</b> |      |
| Edits to ORDERING INFORMATION .....                   | 1    |
| Edits to PIN CONNECTIONS .....                        | 1    |
| Edits to ABSOLUTE MAXIMUM RATINGS .....               | 2    |
| Edits to PACKAGE TYPE .....                           | 2    |
| Edits to ELECTRICAL CHARACTERISTICS .....             | 2, 3 |
| Edits to WAFER TEST LIMITS .....                      | 4    |
| Deleted TYPICAL ELECTRICAL CHARACTERISTICS .....      | 4    |
| Edits to BURN-IN CIRCUIT figure .....                 | 7    |
| Edits to APPLICATION INFORMATION .....                | 8    |

C00317-0-1/02(A)

PRINTED IN U.S.A.