


140x32 Dot Graphic VFD Module

GU140x32F-7003

- ❑ Character Graphic ,Transformerless display
- ❑ Size compatible with U-Version
- ❑ Operating Temp -40°C to +85°C
- ❑ Single 5V Supply with Power Save Mode
- ❑ Smooth vertical/Horizontal scroll
- ❑ Proportional and scalable fonts
- ❑ CMOS sync & Async Serial interface
- ❑ Screen saver & window definition function
- ❑ 8 Level Brightness Control Function

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. This module have CMOS Sync or asyn. Serial Interface.

The module can simultaneously display graphic pattern and / or characters on screen.

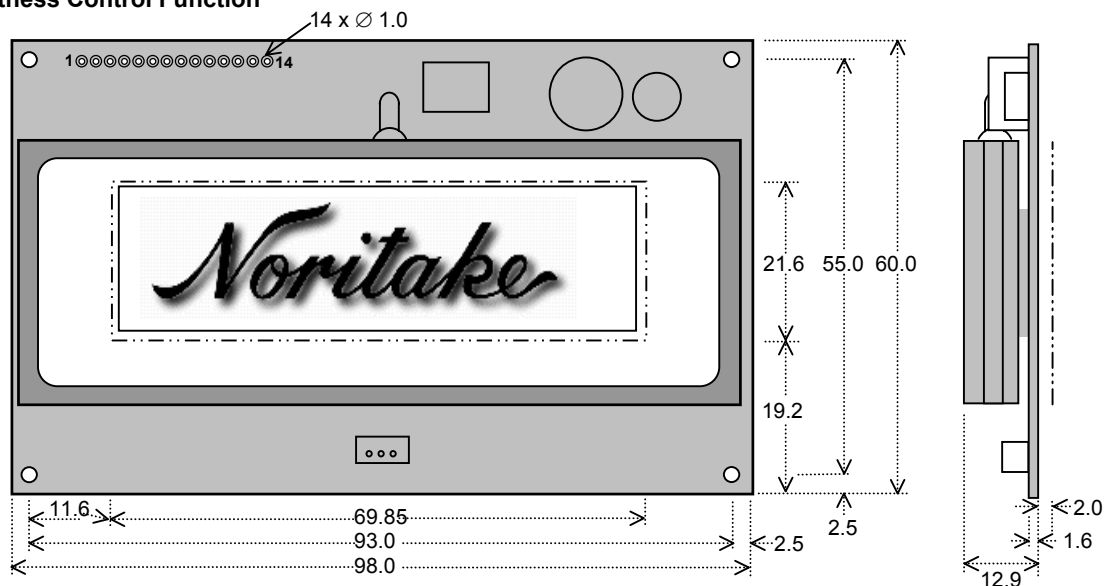

Dimensions in mm & subject to tolerances. Mounting holes 2.5mm dia.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	Vcc	6.0 VDC Max.	GND=0V
Power Supply Current	Icc	400mADC typ.	Vcc=5V
Logic High Input	V _{IH}	0.8VCC min.	Vcc=5V
Logic Low Input	V _{IL}	0.2VCC max.	Vcc=5V
Logic High Output	V _{OH}	3.8VDC min.	I _{OH} = -1.5mA
Logic Low Output	V _{OL}	0.6VDC max.	I _{OL} = 1.6mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x Icc. The Icc current is 10mA maximum while in power down mode.

OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
PCB size/Display area (in mm)	98.0x60.0/ 69.85x21.61
Dot Size/Pitch (XxY mm)	0.35x0.53/ 0.50x0.68
Luminance	700 cd/m ² (204 fL) Typ.
Color of Illumination	Blue-Green (Filter for more colors)
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

Software Commands

Instruction	Code
Character display	20H-FFH
Cursor set	1FH 24H xL xH yL yH
Display clear	0CH
Initialize display	1BH 40H
Specify International font	1BH 52H n
Vertical scroll mode	1FH 02H
Horizontal scroll mode	1FH 03H
Brightness level Setting	1FH 58H n
Scroll Display Action	1FH 28H 61H 10H wL wH cL cH s
Display Blank	1FH 28H 61H 11H p t1 t2 c
Screen Saver	1FH 28H 61H 40H p
Bit Image Display group	1FH 28H 66H 11H xL xH
Font magnified Display	1FH 28H 67H 40H x y

Parallel interface connector

Pin	Sig	Pin	Sig
1	Gnd	2	Vcc
3	NC	4	RS
5	/W	6	/RD
7	D0	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7

Serial Connector

Pin	Asyn. Sig	Syn. Sig
1	Vcc	Vcc
2	SIN	SIN
3	Gnd	Gnd
4	SBUSY	SBUSY
5	NC	SCK
6	/ RESET	/ RESET

COMMON FONT

	2	3	4	5	6	7
x0H	00P'P	01P'P	02P'P	03P'P	04P'P	05P'P
x1H	06P'P	07P'P	08P'P	09P'P	0AP'P	0BP'P
x2H	0CP'P	0DP'P	0EP'P	0FP'P	0GP'P	0HP'P
x3H	0IP'P	0JP'P	0KP'P	0LP'P	0MP'P	0NP'P
x4H	0OP'P	0PP'P	0QP'P	0RP'P	0SP'P	0TP'P
x5H	0UP'P	0VP'P	0WP'P	0XP'P	0YP'P	0ZP'P
x6H	0aP'P	0bP'P	0cP'P	0dP'P	0eP'P	0fP'P
x7H	0gP'P	0hP'P	0iP'P	0jP'P	0kP'P	0lP'P
x8H	0mP'P	0nP'P	0oP'P	0pP'P	0qP'P	0rP'P
x9H	0sP'P	0tP'P	0uP'P	0vP'P	0wP'P	0xP'P
xAH	0yP'P	0zP'P	0A'P'P	0B'P'P	0C'P'P	0D'P'P
xBH	0E'P'P	0F'P'P	0G'P'P	0H'P'P	0I'P'P	0J'P'P
xCH	0K'P'P	0L'P'P	0M'P'P	0N'P'P	0O'P'P	0P'P'P
xDH	0Q'P'P	0R'P'P	0S'P'P	0T'P'P	0U'P'P	0V'P'P
xEH	0W'P'P	0X'P'P	0Y'P'P	0Z'P'P	0a'P'P	0b'P'P
xFH	0c'P'P	0d'P'P	0e'P'P	0f'P'P	0g'P'P	0h'P'P

CHARACTER CODE (n=0)

	8	9	A	B	C	D	E	F
x0H	00P'P	01P'P	02P'P	03P'P	04P'P	05P'P	06P'P	07P'P
x1H	08P'P	09P'P	0AP'P	0BP'P	0CP'P	0DP'P	0EP'P	0FP'P
x2H	0GP'P	0HP'P	0IP'P	0JP'P	0KP'P	0LP'P	0MP'P	0NP'P
x3H	0OP'P	0PP'P	0QP'P	0RP'P	0SP'P	0TP'P	0UP'P	0VP'P
x4H	0WP'P	0XP'P	0YP'P	0ZP'P	0aP'P	0bP'P	0cP'P	0dP'P
x5H	0eP'P	0fP'P	0gP'P	0hP'P	0iP'P	0jP'P	0kP'P	0lP'P
x6H	0mP'P	0nP'P	0oP'P	0pP'P	0qP'P	0rP'P	0sP'P	0tP'P
x7H	0uP'P	0vP'P	0wP'P	0xP'P	0yP'P	0zP'P	0A'P'P	0B'P'P
x8H	0C'P'P	0D'P'P	0E'P'P	0F'P'P	0G'P'P	0H'P'P	0I'P'P	0J'P'P
x9H	0K'P'P	0L'P'P	0M'P'P	0N'P'P	0O'P'P	0P'P'P	0Q'P'P	0R'P'P
xAH	0S'P'P	0T'P'P	0U'P'P	0V'P'P	0W'P'P	0X'P'P	0Y'P'P	0Z'P'P
xBH	0a'P'P	0b'P'P	0c'P'P	0d'P'P	0e'P'P	0f'P'P	0g'P'P	0h'P'P
xCH	0i'P'P	0j'P'P	0k'P'P	0l'P'P	0m'P'P	0n'P'P	0o'P'P	0p'P'P
xDH	0q'P'P	0r'P'P	0s'P'P	0t'P'P	0u'P'P	0v'P'P	0w'P'P	0x'P'P
xEH	0y'P'P	0z'P'P	0A'P'P	0B'P'P	0C'P'P	0D'P'P	0E'P'P	0F'P'P
xFH	0G'P'P	0H'P'P	0I'P'P	0J'P'P	0K'P'P	0L'P'P	0M'P'P	0N'P'P

CONTACT

Noritake Sales Office Tel Nos
 Nagoya Japan: +81 (0)52-561-9867
 Canada: +1-416-291-2946
 Chicago USA: +1-847-439-9020
 Munchen (D): +49 (0)89-3214-290
 Itron UK: +44 (0)1493 601144
 Rest Europe: +49 (0)61-0520-9220
www.noritake-elec.com

PLEASE INQUIRE FOR FINAL SPECIFICATION