



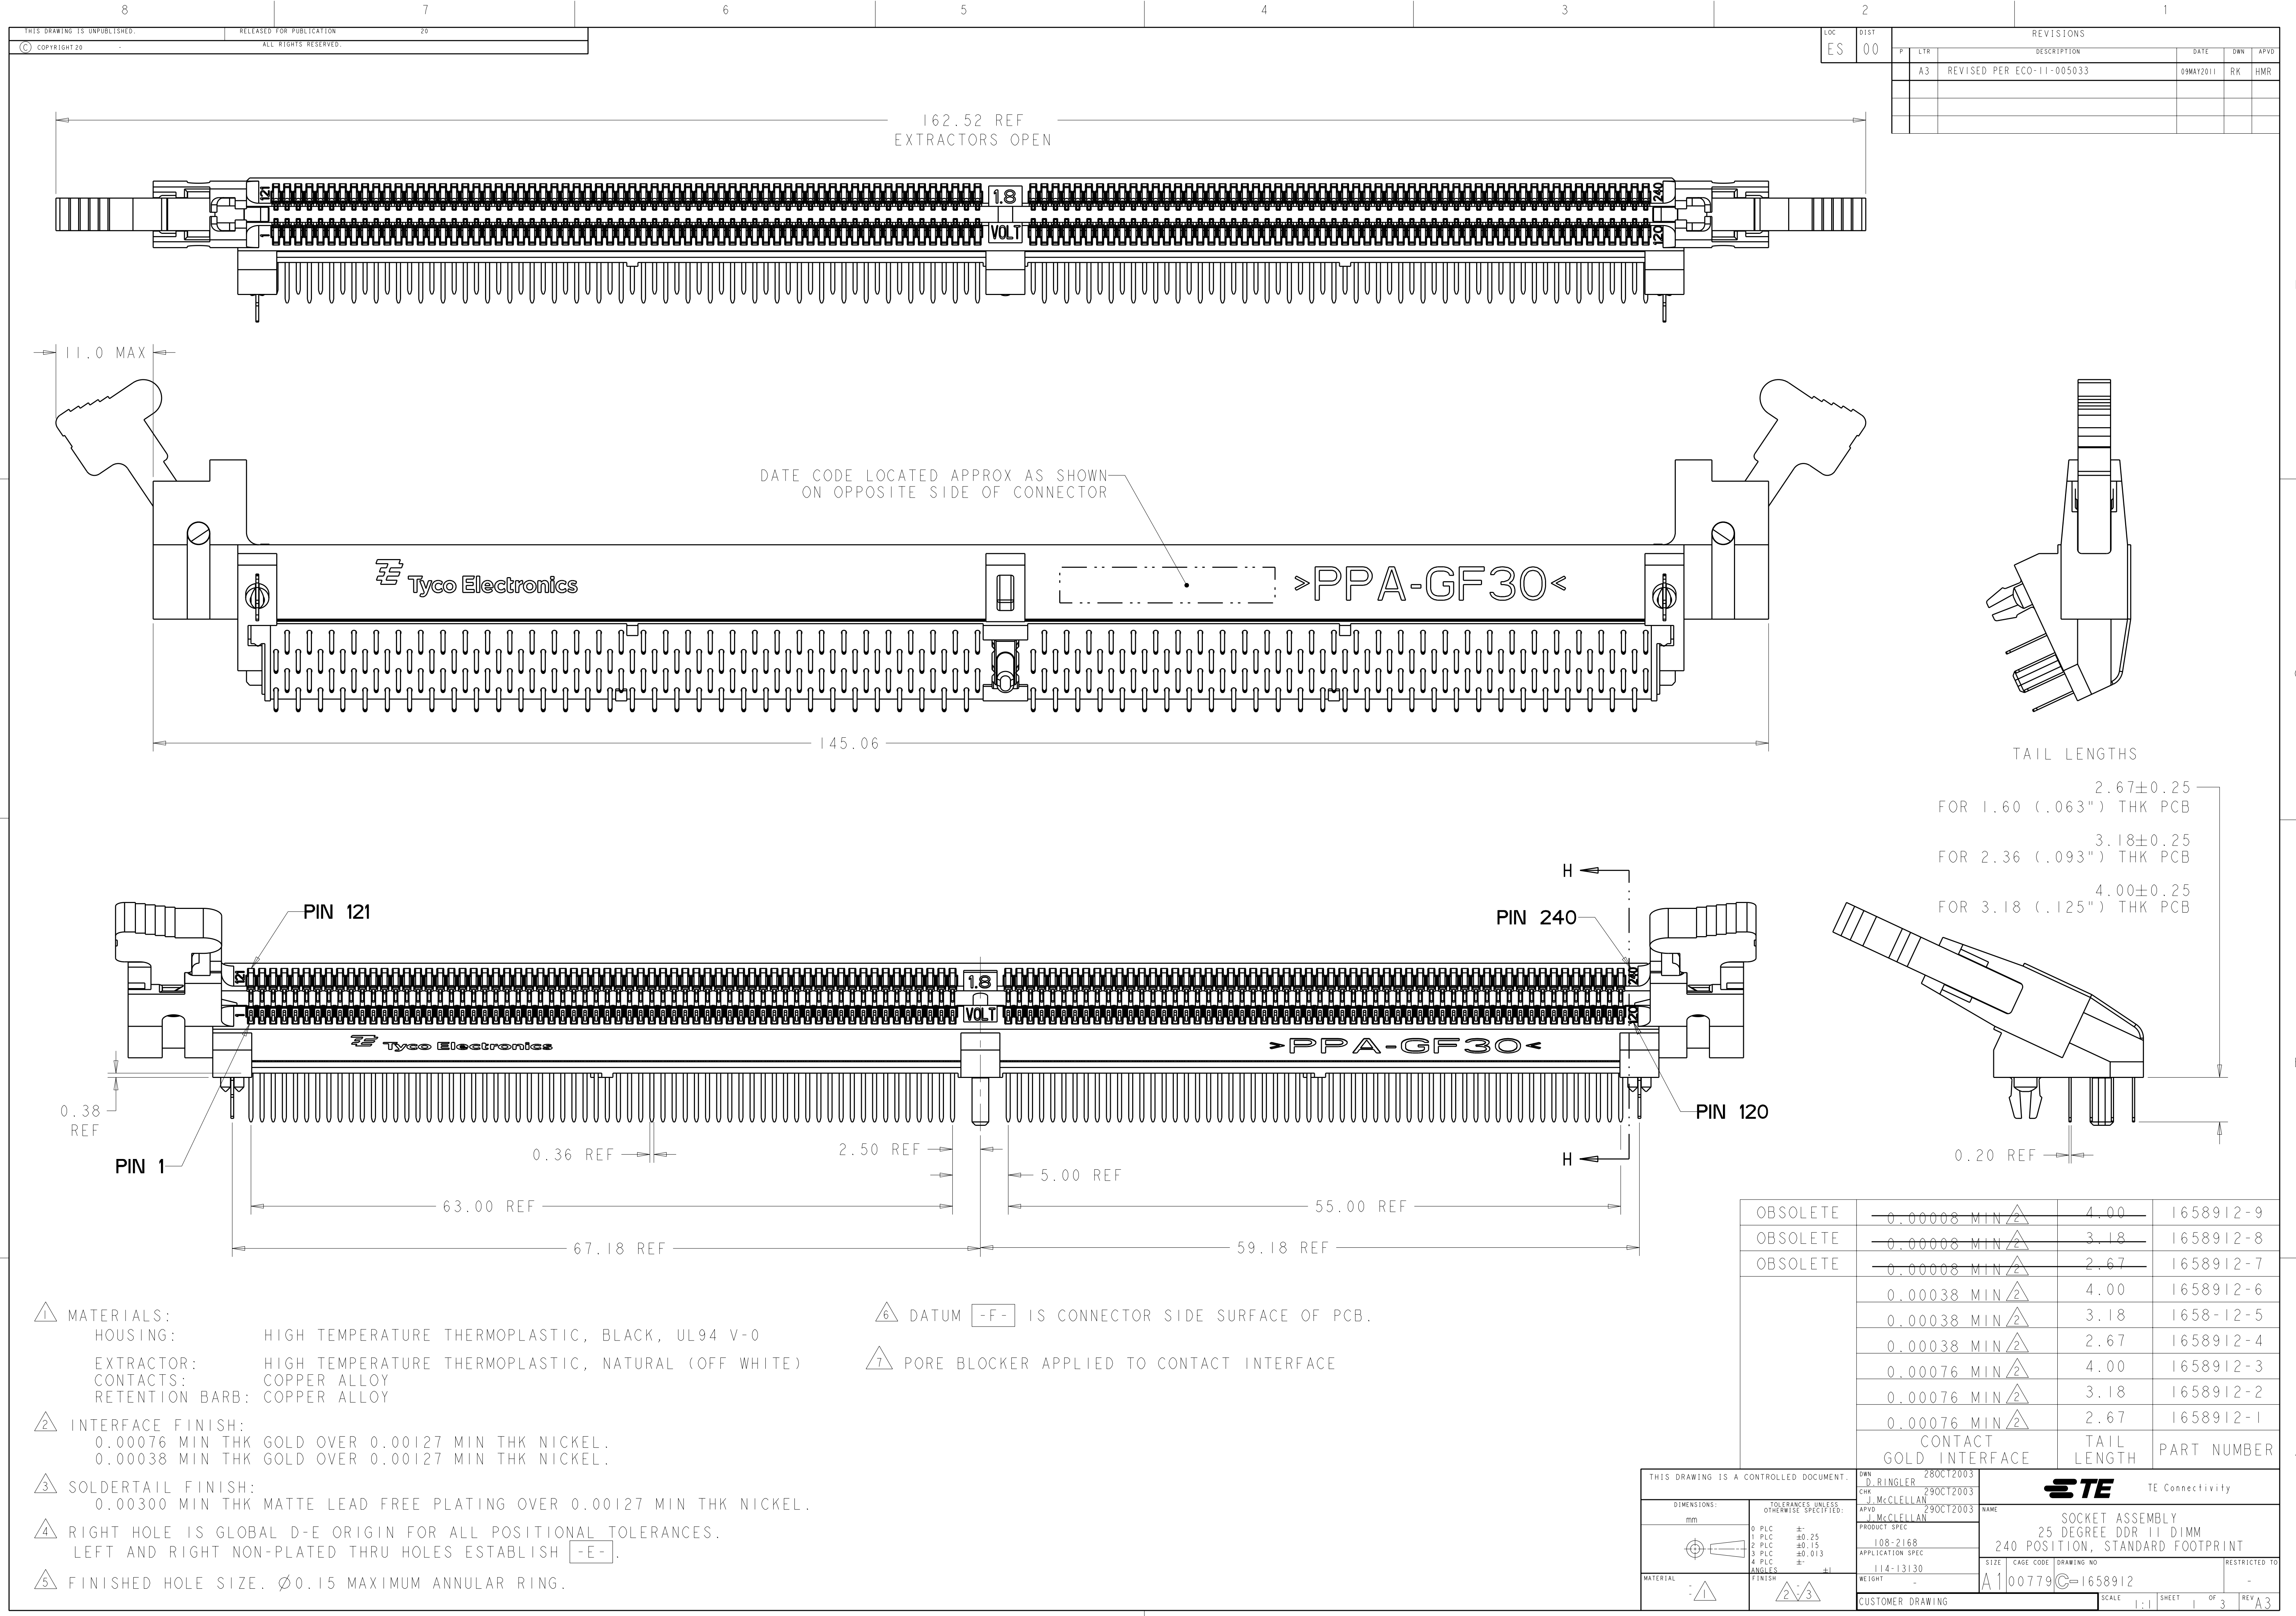

LOC		DIST		REVISIONS			
ES	00	P	LYR	DESCRIPTION	DATE	OWN	APVD
		-	-	SEE SHEET 1	-	-	-

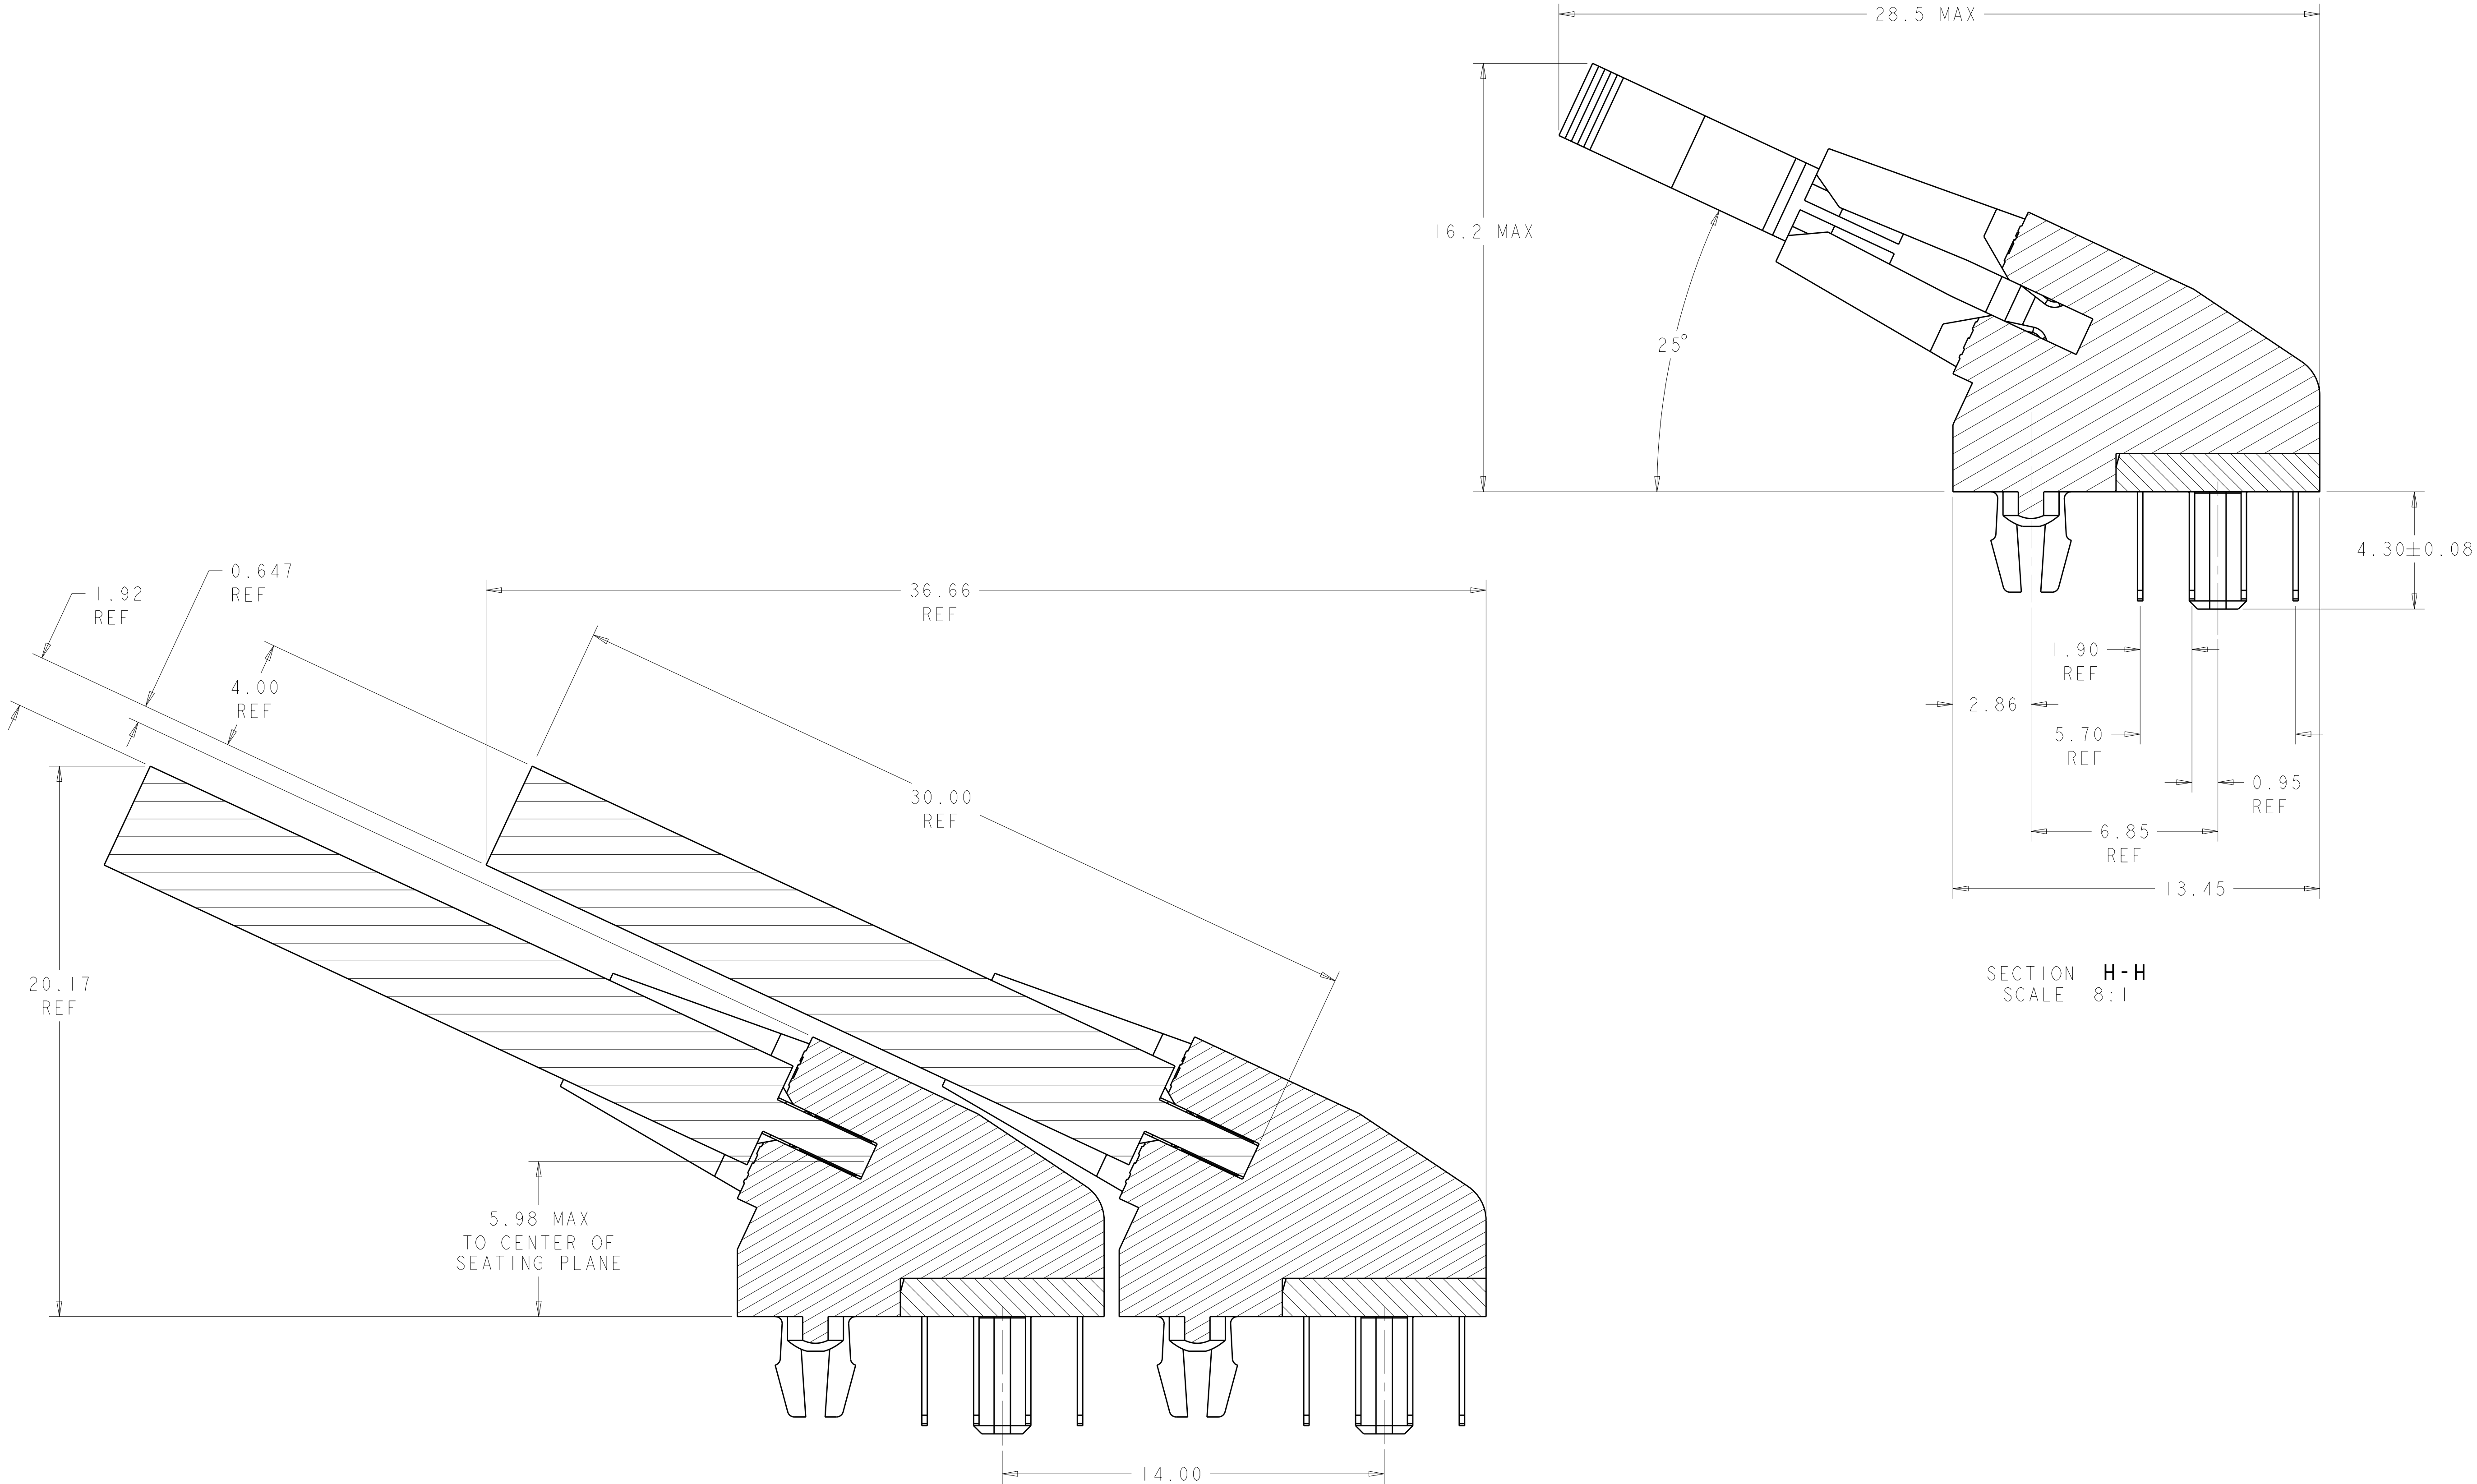

SECTION H-H
SCALE 8:1

MINIMUM RECOMMENDED ROW TO ROW SPACING
FOR 4mm THICK MODULE

SCALE 8:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. RINGLER 28OCT2003
CHK
J. McCLELLAN 29OCT2003
APVD
J. McCLELLAN 29OCT2003

NAME
SOCKET ASSEMBLY
25 DEGREE DDR II DIMM
240 POSITION, STANDARD FOOTPRINT

DIMENSIONS:
mm

9 PLG
3 PLG
3 PLG
4 PLG
ANGLES
FINISH

±
±0.25
±0.15
±0.013
±
#1

MATERIAL
-

FINISH
-

PRODUCT SPEC
108-2168
APPLICATION SPEC
114-13130
WEIGHT
-

CAGE CODE
A100779
DRAWING NO
C=1658912

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE 1:1 SHEET 2 OF 3 REV A3

STE

TE Connectivity

