



注記 NOTES

- 製品番号 52559-**17 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については図面 SD-52559-044 を参照下さい。
IN THE PACKAGE,ACTUATOR OF PART NO.52559-**17 SHOULD BE LOCKED
RE DETAILED DIMENSIONS,SEE SD-52559-044
- 梱包数量：1000個/リール
NUMBER OF CONNECTORS:1000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

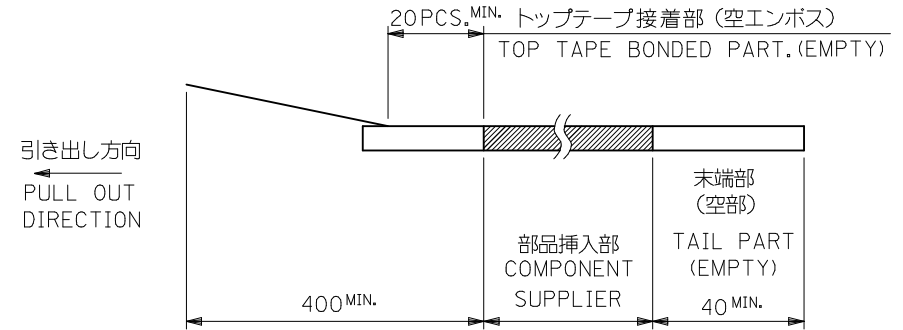


- トップテープの剥離強度：(剥離方向は下図参照)
0.1N~0.7N(10.2gf~71.4gf)尚、本規格値は、出荷時に適用。
(但し、輸送時に剥離が発生しない事。)

PEELING OFF FORCE OF TOP TAPE
0.1N~0.7N(10.2gf~71.4gf)(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION

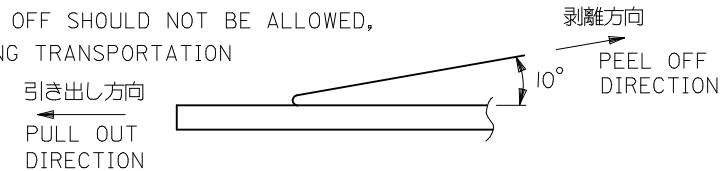

引き出し方向
PULL OUT
DIRECTION

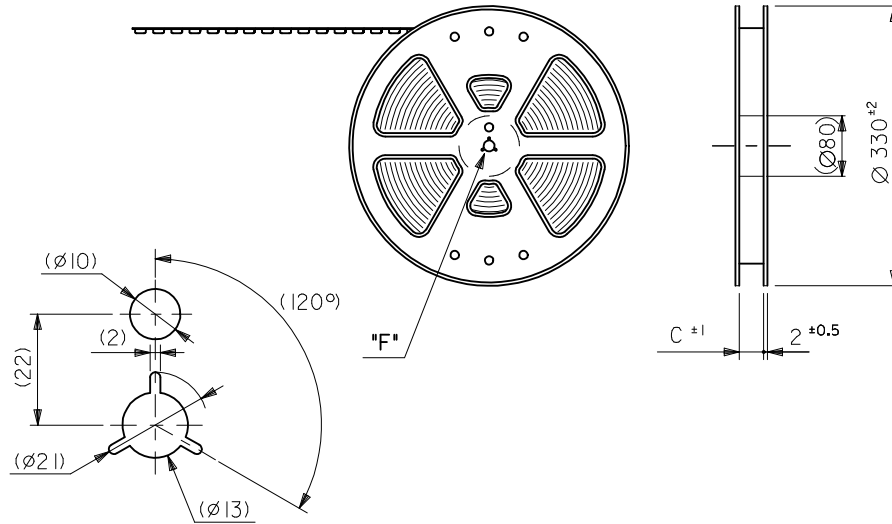

DETAIL "F"

- 材料
キャリアテープ：ポリプロピレン (PP)
トップテープ：PET, PE, PEF
リール：ポリスチレン (PS) <リサイクル材を含む>

MATERIAL CARRIER TAPE:POLYPROPYLENE
TOP TAPE:PET,PE,PEF
REEL:POLYSTYRENE(PS)
<RECYCLE MATERIAL CONTAINED>

REVISED	EC NO: J2016-0380	DRAWN: SANUMA CHKD: KATAHASHI APP: YNOGAWA	2015/10/15 2015/10/16 2015/11/09	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
					0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 0.5 FPC CONN ASSY ZIF SMT ST EMBSTP PKG						
					0.25 OVER	0.5 UNDER	±0.05	M.SHIMIZU	2000/12/20							
					0.5 OVER	1.0 UNDER	±0.1	CHECKED BY	DATE	MATERIAL NO. SEE SHEET 2,3						
					1.0 OVER	10 UNDER	±0.2	S.KUNISHI	2000/12/20							
					10 OVER	30 UNDER	±0.25	APPROVED BY	DATE	DOCUMENT NO. SD-52559-054						
					30 OVER		±0.3	M.FUKUSHIMA	2000/12/20							
					ANGULAR ±3 °			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D

C

B

A

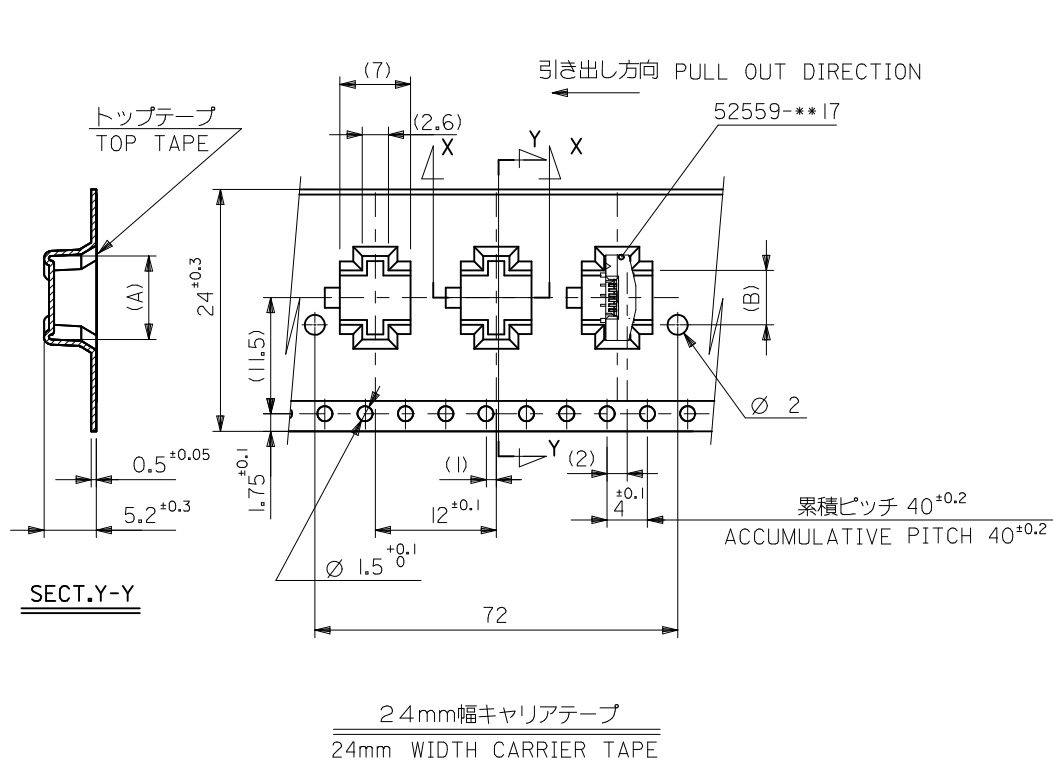

24		25.5		5.4		8.3		52559-0692		6	
キャリアテープ幅 CARRIER TAPE WIDTH		C		(B)		(A)		ENG. NO.		極数 CIRCUIT	
DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC				THIRD ANGLE PROJECTION			
DRAWN BY MIMIZU		DATE 2000/12/20		TITLE 0.5 FPC CONN ASSY ZIF SMT ST EMBSTP PKG							
CHECKED BY NISHI		DATE 2000/12/20									
APPROVED BY FUKUSHIMA		DATE 2000/12/20		molex							
MATERIAL NO.		DOCUMENT NO.									
SEE CHART				SD-52559-054						2 OF 3	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

9 8 7 6 5 4 3 2 1

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F

E


D

C

B

A

引き出し方向 PULL OUT DIRECTION

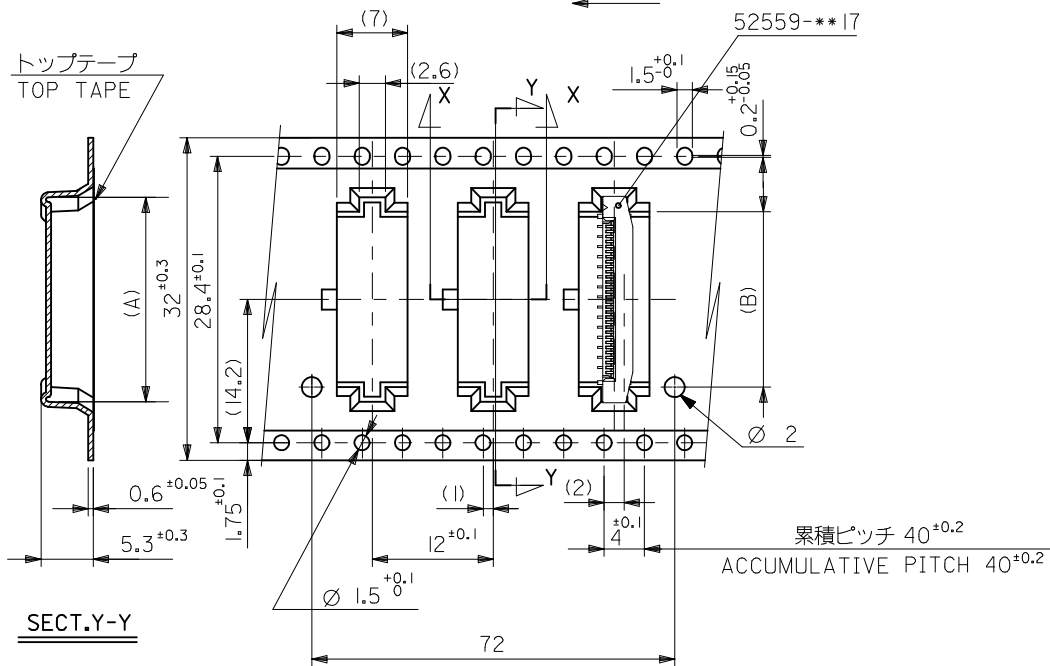

SECT.X-X

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32	33.5	17.4	20.3	52559-3092	30
キャリアテープ幅 CARRIER TAPE WIDTH	C	(B)	(A)	ENG. NO.	極致 CIRCUIT

REVISED EC NO: J2016-0380 DRWN: NASHIMA 2015/10/15 CHKD: TAKAHASHI 2015/10/16 APPR: YNOGAWA 2015/11/09	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION							
		0.25	UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 0.5 FPC CONN ASSY ZIF SMT ST EMBSTP PKG									
		0.25	OVER	0.5	UNDER	±0.05	CHECKED BY					DATE					
		0.5	OVER	1.0	UNDER	±0.1	S.KUNISHI					2000/12/20					
		1.0	OVER	10	UNDER	±0.2	APPROVED BY					DATE					
		10	OVER	30	UNDER	±0.25	M.FUKUSHIMA	2000/12/20	DOCUMENT NO. SD-52559-054								
		30	OVER		±0.3	MATERIAL NO.		SHEET NO. 3 OF 3									
		ANGULAR ±3 °				SEE CHART											
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

9 8 7 6 5 4 3 2 1