

Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- Low power loss high efficiency
- High surge capacity, High current capability

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

Microsemi Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR2520	MBR2520	20V	14V	20V
MBR2530	MBR2530	30V	21V	30V
MBR2535	MBR2535	35V	24.5V	35V
MBR2540	MBR2540	40V	28V	40V
MBR2545	MBR2545	45V	31.5	45V
MBR2560	MBR2560	60V	42V	60V
MBR2580	MBR2580	80V	56V	80V
MBR25100	MBR25100	100V	70V	100V

Electrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward Current	$I_{F(AV)}$	25A	$T_C = 130^{\circ}\text{C}$
Peak Forward Surge Current	I_{FSM}	150A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element MBR2020-2045 MBR2060 MBR2080-20100	V_F	.63V .75V .84V	$I_{FM} = 25\text{A}$ per element; $T_A = 25^{\circ}\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	0.2mA	$T_J = 25^{\circ}\text{C}$

*Pulse test: Pulse width 300 μ sec, Duty cycle 1%

**MBR2520
THRU
MBR25100**

**25 Amp
Schottky Barrier
Rectifier
20 to 100 Volts**


TO-220AC

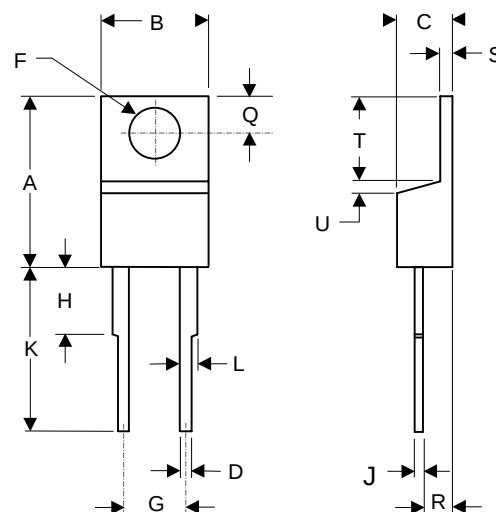

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.595	.620	15.11	15.75	
B	.380	.405	9.65	10.29	
C	.160	.190	4.06	4.82	
D	.025	.035	0.64	0.89	
F	.142	.147	3.61	3.73	
G	.190	.210	4.83	5.33	
H	.110	.130	2.79	3.30	
J	.018	.025	0.46	0.64	
K	.500	.562	12.70	14.27	
L	.045	.060	1.14	1.52	
Q	.100	.120	2.54	3.04	
R	.080	.110	2.04	2.79	
S	.045	.055	1.14	1.39	
T	.235	.255	5.97	6.48	
U	-----	.050	-----	1.27	


MBR2520 thru MBR25100

Figure 1
Typical Forward Characteristics

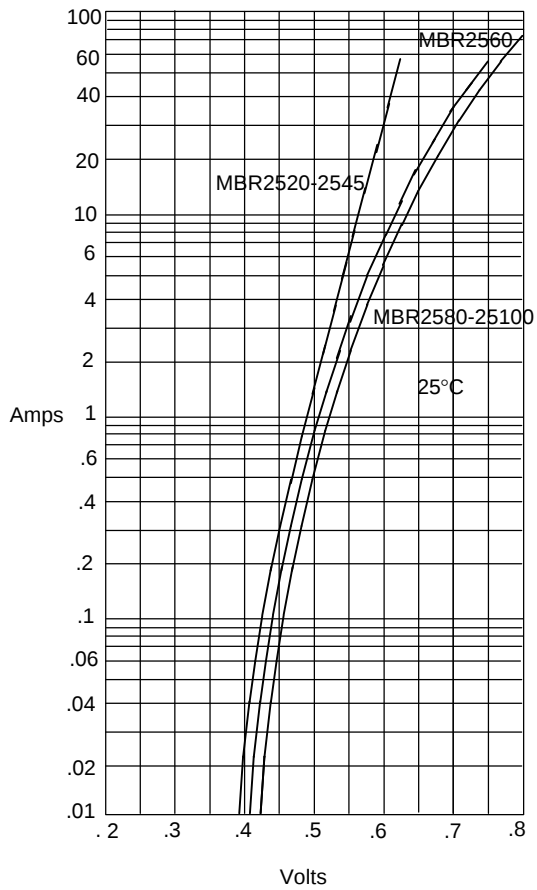


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Typical Reverse Characteristics

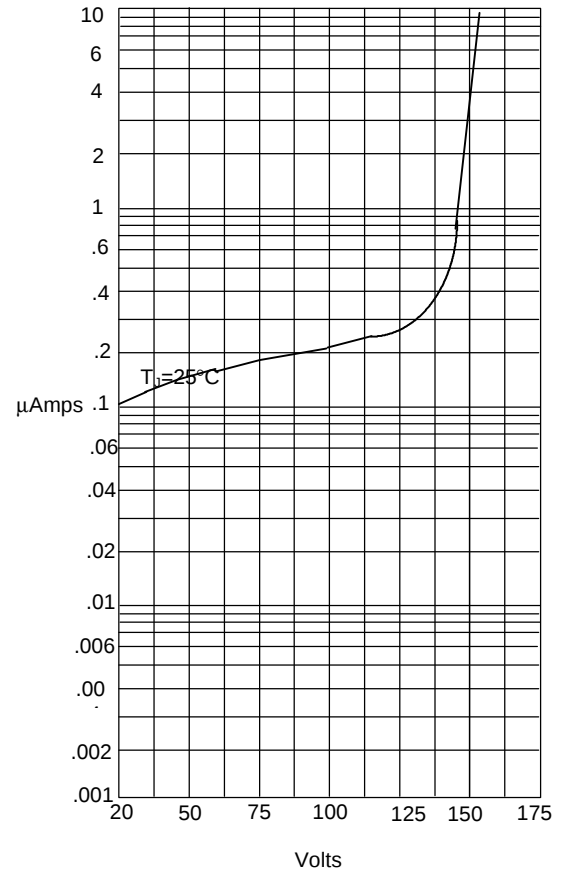


Instantaneous Reverse Leakage Current - MicroAmperes *versus*
Percent Of Rated Peak Reverse Voltage - Volts

Figure 3
Forward Derating Curve

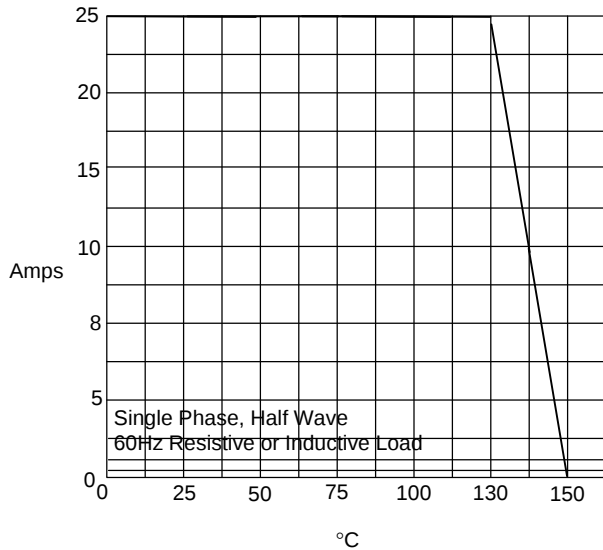

Average Forward Rectified Current - Amperes *versus*
Ambient Temperature - °C

Figure 4
Peak Forward Surge Current

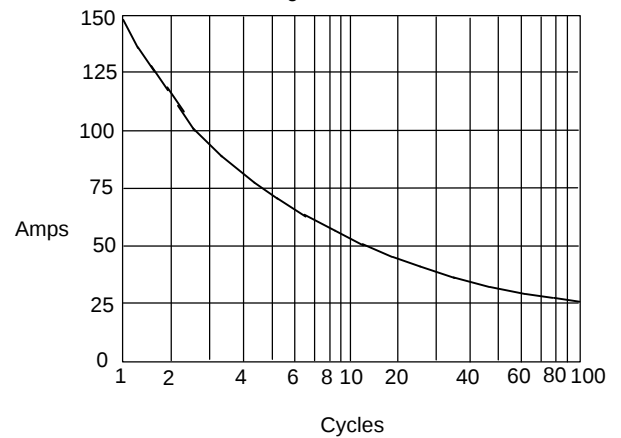

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles