


4

3


2

1


LOC	DIST	REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	APVD
			B	RELEASED	-	-

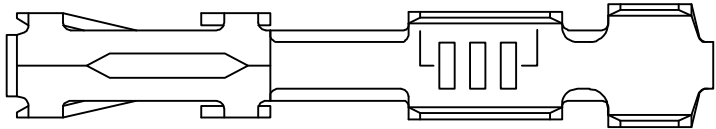

- 1 .LOOSE PIECE TERMINAL MUST MEET ALL APPLICABLE STRIP SPECIFICATIONS IN ADDITION TO THOSE SHOWN.
- 2 .000030 MIN. GOLD OVER .000050—.000100 NICKEL.
- 3 GOLD FLASH OVER .000050—.000100 NICKEL
.000030 GOLD ON CONTACT AREA.
- 4 PREPLATING: .000078—.000158 BRIGHT TIN (HALT)
PER 112-20-6
- 5 .000050 GOLD OVER .000050—.000100 NICKEL.
- 6 GOLD FLASH OVER .000050—.000100 NICKEL
.000015 GOLD ON CONTACT AREA.
- 7 GOLD FLASH ON AREA "L"
.000050 GOLD ON CONTACT AREA.
ALL OVER .000050—.000100 NICKEL ENTIRE CONTACT.

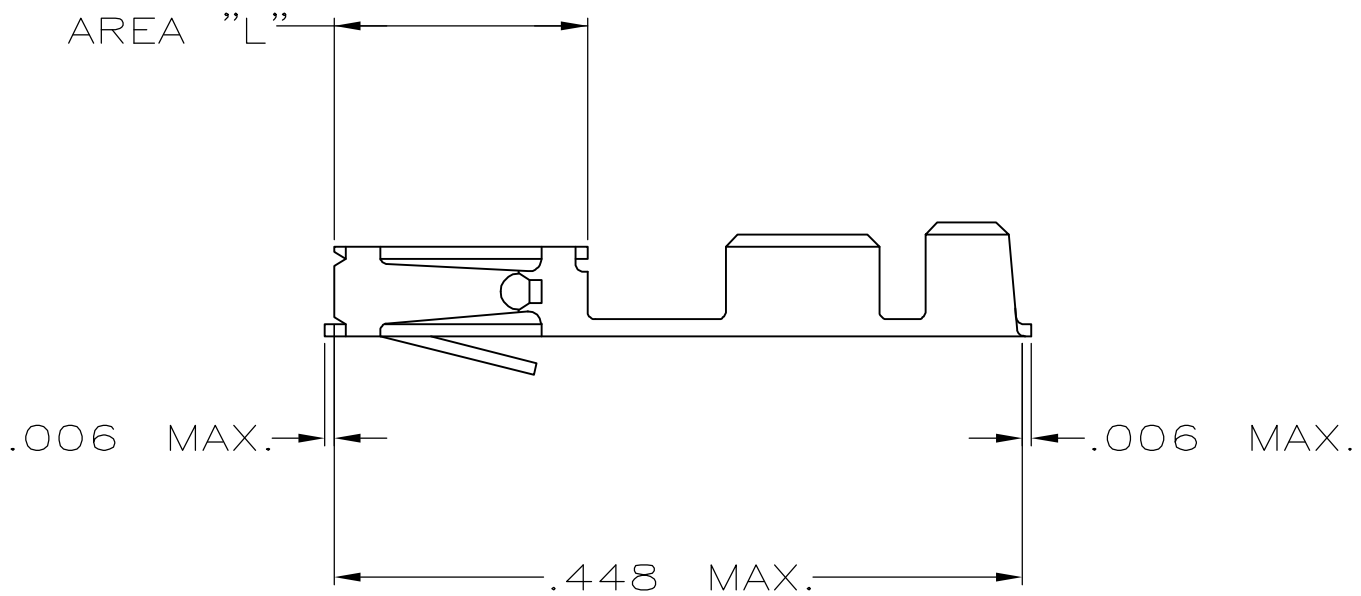

OBSOLETE	7	1-87666-6	87667-6
	6	87666-5	87667-5
	5	87666-4	87667-4
	4	87666-3	87667-3
	3	87666-2	87667-2
	2	87666-1	87667-1
FINISH		MAKE FROM STRIP PART NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 27JUN06		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		CHK D.ROHDE 27JUN06					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CONTACT,FEMALE,MOD IV, CRIMP SNAP-IN (LOOSE PIECE) —			
		0 PLC ± —					
		1 PLC ± —					
		2 PLC ± .02					
		3 PLC ± .005		SIZE A3			
		4 PLC ± .0005				CAGE CODE 00779	
		ANGLES ± 0°30'					
				RESTRICTED TO —			
MATERIAL SEE TABLE		FINISH SEE TABLE				CUSTOMER DRAWING	
				SHEET 1 OF 1			
						REV B	