



FCI P/N	"L"
(NOTE 5)	
10046508-YXXXLF	XXX
10046508-YXXX	XXX

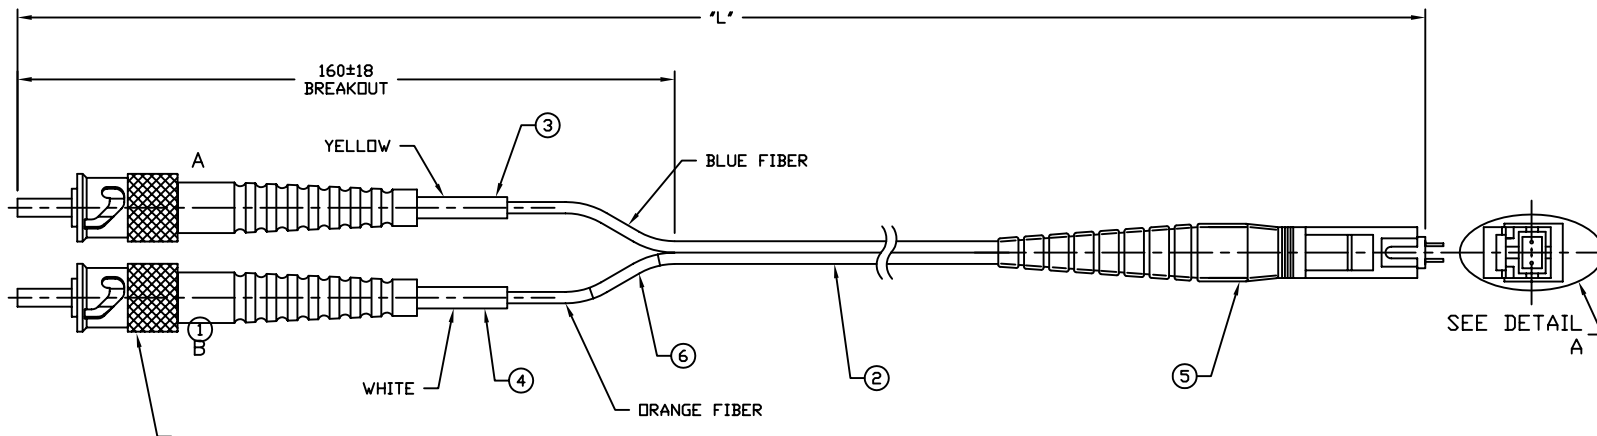

NOTES:

1. SEE DWG 55000 FOR SPECIFICATIONS AND TOLERANCES. NO ENDFACE GEOMETRY REQUIRED ON THIS PART.
2. ALL FERRULES: THESE AREAS TO BE FREE OF CURED EPOXY AFTER POLISHING. THAT IS, THE OUTER CYLINDRICAL SIDEWALLS, THE DOMED END FACE, AND THE CHAMFER.
3. THE MAXIMUM DIFFERENCE IN LENGTH OF THE ST2 CONNECTORS IS 0.50 INCHES.
4. IDENTIFICATION LABEL SHALL BE LOCATED 4-6 INCHES FROM ANY ONE CONNECTOR TIP. CABLES EXCEEDING 10 FEET IN LENGTH REQUIRE A LABEL AT BOTH ENDS. APPROVED EQUIVALENT LABELS MAY BE USED.
5. FCI P/N SHALL CONSIST OF THE DWG NUMBER, A DASH AND THE SUFFIX YXXXLF WHERE THE Y IS THE UNIT OF LENGTH (Y=M IS METERS, Y=F IS FEET) AND WHERE XXX IS THE LENGTH. EX. 10046508-F004 IS 4 FEET IN LENGTH. "LF" SUFFIX INDICATES PRODUCT IS LEAD FREE (10046508-F004LF) IS LEAD FREE.
6. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESS.
7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

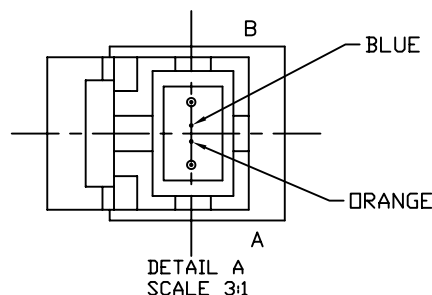

COMPONENTS		
ITEM	QTY.	DESCRIPTION
1	2	ST2 CONNECTOR, 3mm, MM-127
2	"L"	CABLE, 1.6MM ZIP, 62/125/650
3	1	HEAT SHRINK TUBE 2" PIECE, YELLOW
4	1	HEAT SHRINK TUBE 2" PIECE, WHITE
5	1	MTRJ CONNECTOR KIT, MM MALE ZIP CORD
6	A/R	IDENTIFICATION LABEL (SEE NOTE 4)
-	A/R	EPOXY
7	1	MM FURRULE (PPS), 2 FIBER BOOT

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com		
ltr	ecr no	dr	date		NOMINALS ONLY				
A	V04-1066	DAI	10/28/04	linear	UNLESS NOTED	projection	title CA, M, MJ-ST2 1.6mm ZIP MM-62.5		
B	V06-0025	VS	1/12/06	angles					
				dr	D.INGRAM	10/28/04	product family FIBER OPTICS		
				enrg	L.CONLIN	10/28/04			
				chr	L.CONLIN	10/28/04	size dwg no A 10046508		
				appd	L.CONLIN	10/28/04			
sheet index	revision sheet	B	1				code 22526		