


CDBB220 Thru CDBB2100

Reverse Voltage: 20 - 100 Volts

Forward Current: 2.0 Amp




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Built-in strain relief
- Low forward voltage drop

Mechanical Data

- Case: JEDEC DO-214AA molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.093 gram

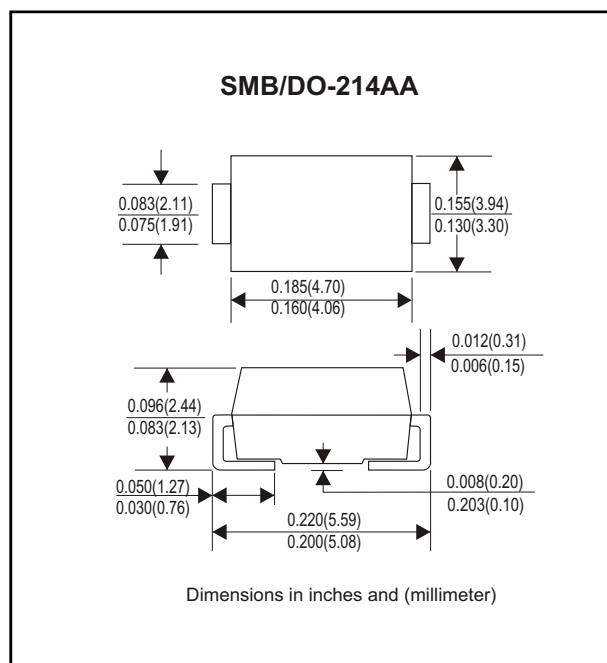

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBB220	CDBB240	CDBB260	CDBB2100	Unit
Max. Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	100	V
Max. DC Blocking Voltage	V_{DC}	20	40	60	100	V
Max. RMS Voltage	V_{RMS}	14	28	42	70	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rateload (JEDEC method)	I_{FSM}	50				A
Max. Average Forward Current	I_o	2.0				A
Max. Instantaneous Forward Current at 2.0 A	V_F	0.50		0.70	0.85	V
Max. DC Reverse Current at Rated DC Blocking Voltage $T_a = 25^{\circ}\text{C}$ $T_a = 100^{\circ}\text{C}$	I_R	0.5				mA
		20			10	
Max. Thermal Resistance (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$	75 17				$^{\circ}\text{C/W}$
Operating Junction temperature	T_j	-50 to +125				$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-65 to +150				$^{\circ}\text{C}$

Note 1: Thermal resistance from junction to ambient and junction to lead P.C.B. Mounted on 0.2 x 0.2 copper pad areas

Rating and Characteristic Cures (CDBB220 Thru CDBB2100)

Fig. 1 - Reverse Characteristics

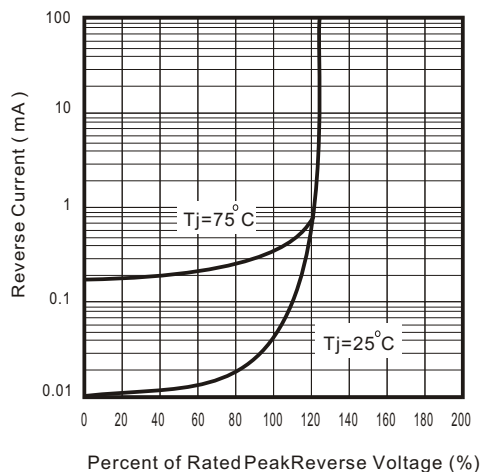


Fig.2 - Forward Characteristics

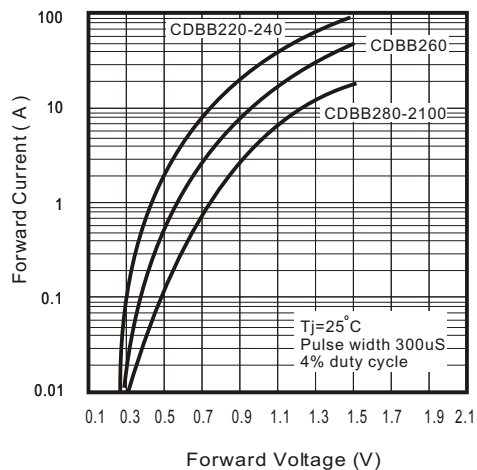


Fig. 3 - Junction Capacitance

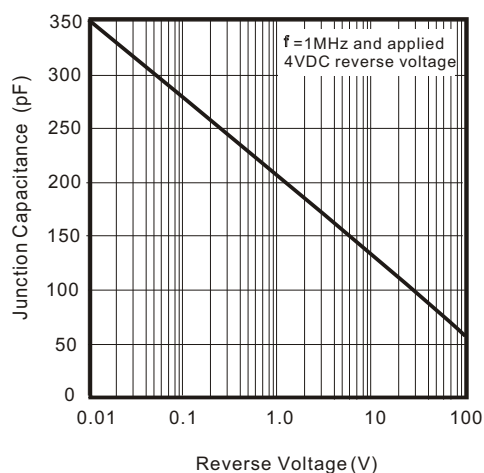


Fig. 4 - Current Derating Curve

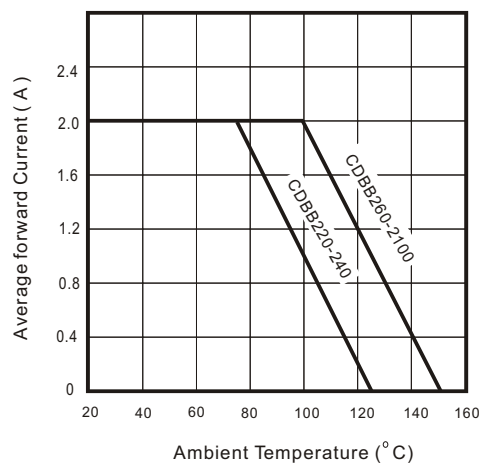


Fig. 5 - Non Repetitive Forward Surge Current

