
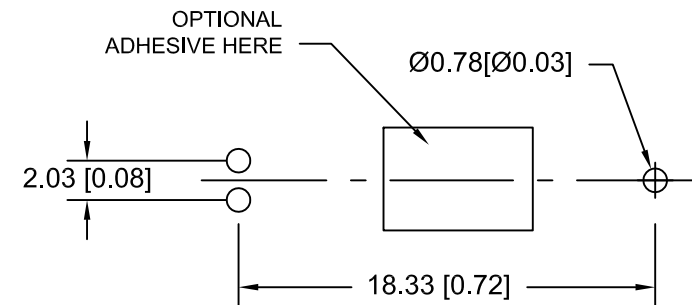


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/10/12	A	Removed one cutout	T.B.	B.S.	
11/14/14	B	Updated to ROHS 2 Compliant	T.B.	B.S.	

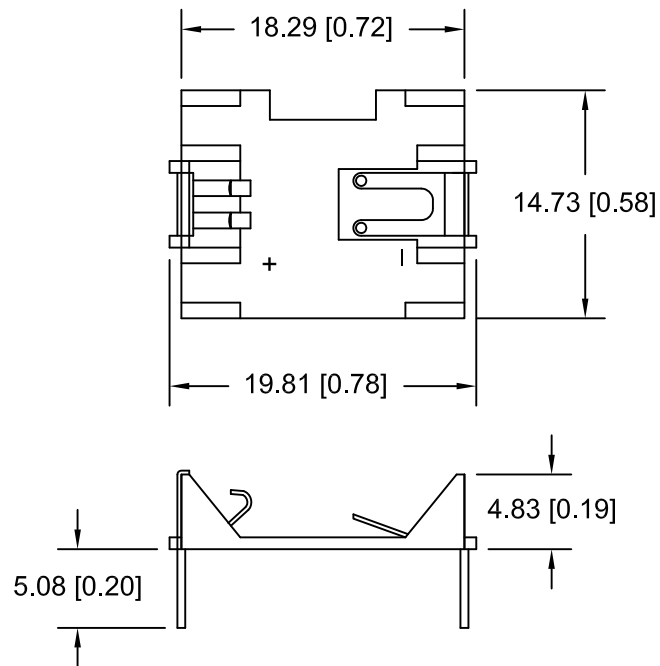

**PCB LAYOUT**

#### SPECIFICATIONS:

- \* Holder material- LCP Vectra, Color white, UL File No. E174096
- \* Contacts : Phosphor Bronze C5191, Gold Flash, 1u - 3u thickness
- \* Temperature range: -40°C to +280°C
- \* Vibration Test: 10-50-10 Hz swept in 60 seconds  
X,Y,Z direction: 1 hour each direction
- \* Result: No dislodgement of the cell or damage  
No discontinuity over 10 micro-seconds
- \* Shock Test: Half sine wave acceleration 150G. 6 micro-seconds  
3 shock pulses each direction per axis, total of 18 pulses
- \* Result: No evidence of physical damage
- \* Drop Test: 1meter - No dislodgement of cell
- \* ROHS 2 Compliant

Tolerance (Inches)	<div><div><div></div><div></div><div></div><div></div></div><div>MPD</div></div> Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title BASE, CR1225 THROUGH HOLE BATTERY		
Angular ± 3°	Date 11/14/14	Drawing Number BHSD-1225-PC	