

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AJ	16		A	REVISED PER ECO-06-012234	31MAY2006	KS JH

- 1

ZINC PER QQ-Z-363.
- 2




PHOSPHOR BRONZE PER ASTM-B-139.
- 3

POLYESTER PER ASTM-D-3220.
- 4

TIN PLATE PER ASTM-B-545,
2.54 μ m [.000100] MINIMUM THICK.
- 5

SILVER PLATE PER QQ-S-365
2.54 μ m [.000100] MINIMUM THICK.
- 6

SEE INSTRUCTION SHEET 408-9889.

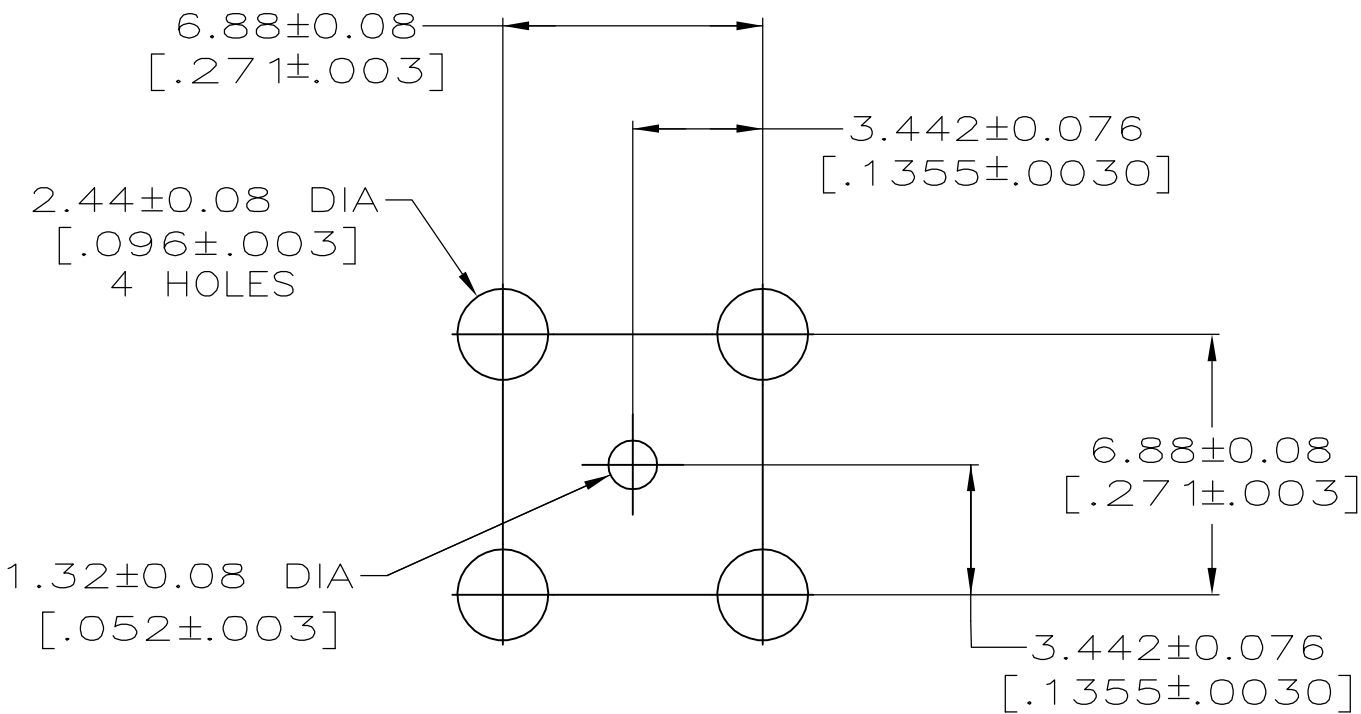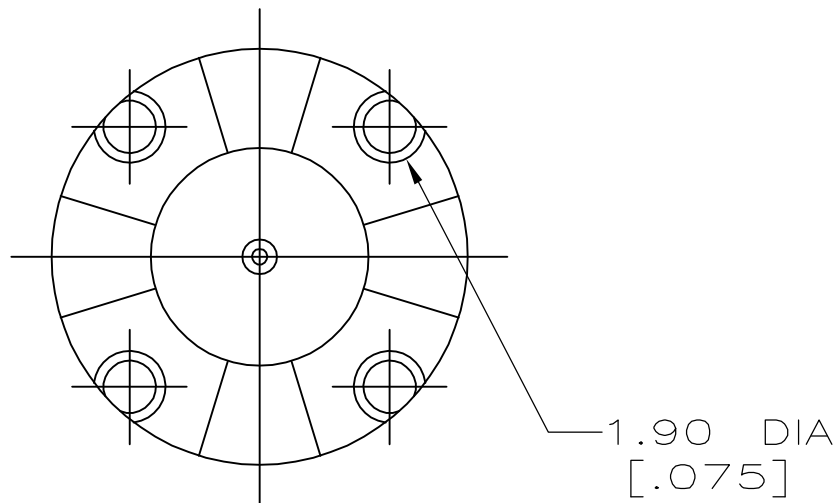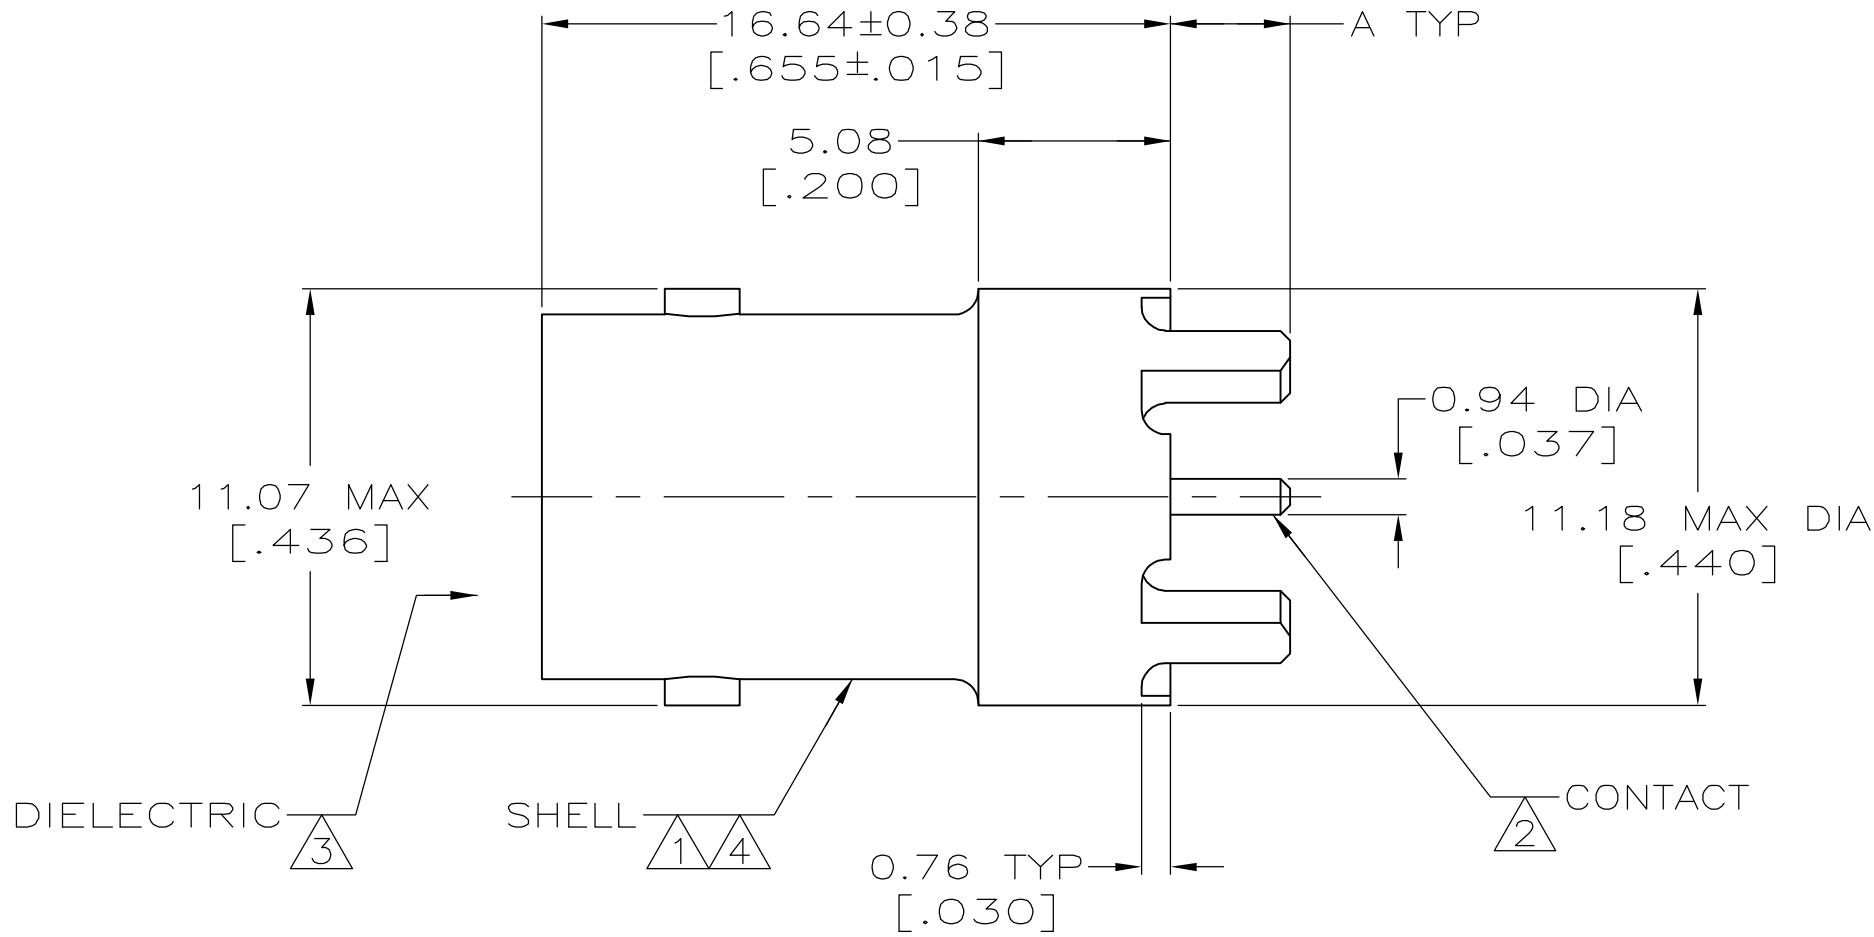

SUGGESTED PCB CONFIGURATION

5	3.17 [.125]	5414305-1
CONTACT FINISH	A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 26APR2005	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK J. HAVENER 26APR2005		
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH	APVD J. LIPPERT 26APR2005	NAME JACK, VERTICAL, PCB 50 Ohm, COMMERCIAL BNC	
		PRODUCT SPEC 108-12078 APPLICATION SPEC		
MATERIAL SEE NOTES 1 - 3	SEE NOTES 4 - 5	WEIGHT -	SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 of 1	REV A