

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon


LD series

Miniature sized, Long Life Assurance



NEW



- Long Life product withstanding load life of 12000 to 20000 hours at +105°C.
- Suited for the power supply for LED lighting.
- Compliant to the RoHS directive (2011/65/EU).

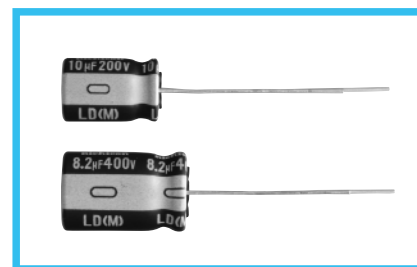

Specifications


Item	Performance Characteristics										
Category Temperature Range	−40 to +105°C(160 to 400V), −25 to +105°C(450V)										
Rated Voltage Range	160 to 450V										
Rated Capacitance Range	1 to 68μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	After 1 minute's application of rated voltage, CV ≤ 1000 : I = 0.1CV+40 (μA) or less. After 1 minute's application of rated voltage, CV > 1000 : I = 0.04CV+100 (μA) or less.										
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C										
	Rated voltage (V)	160	200	250	400	450					
	tan δ (MAX.)	0.24	0.24	0.24	0.24	0.24					
Stability at Low Temperature	Measurement frequency : 120Hz										
	Rated voltage (V)		160	200	250	400	450				
	Impedance ratio	Z-25°C / Z+20°C	3	3	3	6	6				
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	8	8	8	10	—				
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 20000 hours (12000 hours for φ6.3 × 11L, φ8 × 9L, φ10 × 9L, 15000 hours φ8 × 11.5L, φ10 × 12.5L) at 105°C, the peak voltage shall not exceed the rated voltage.										
							Capacitance change	Within ±30% of the initial capacitance value			
							tan δ	300% or less than the initial specified value			
	Leakage current	Less than or equal to the initial specified value									
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										
Marking	Printed with white color letter on dark brown sleeve.										

Radial Lead Type

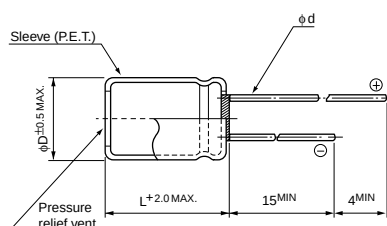

	(mm)					
φD	6.3	8	10	12.5	16	18
P	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.6	0.6	0.6	0.8	0.8

Type numbering system (Example : 400V 6.8µF)

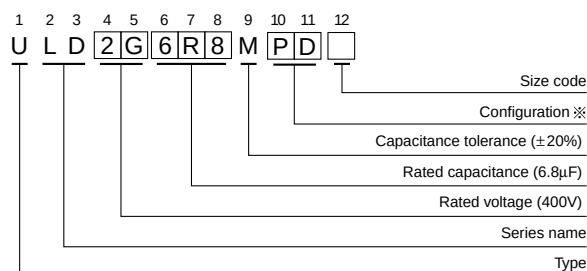

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
6.3	ED
8・10	PD
12.5 to 18	HD

- Please refer to page 20 about the end seal configuration.
- Please refer to page 20, 21, 22 about the formed or taped product spec.
- Please refer to page 4 for the minimum order quantity.

■ Dimensions

Cap	Code	V		160		200		250		400		450	
				2C		2D		2E		2G		2W	
1	010									6.3 × 11	24	Case size φD × L (mm)	※
1.2	1R2									8 × 9	28		
1.5	1R5									6.3 × 11	29		
										▲ 8 × 9	30		
1.8	1R8							6.3 × 11	33	8 × 9	33		
2.2	2R2					6.3 × 11	36	6.3 × 11	36	8 × 11.5	40		
										▲ 8 × 9	33		
2.7	2R7									8 × 11.5	43		
3.3	3R3					6.3 × 11	42	6.3 × 11	42	8 × 11.5	47		
										▲ 10 × 9	48		
3.9	3R9									10 × 12.5	57		
4.7	4R7					6.3 × 11	49	8 × 9	53	10 × 12.5	61		
5.6	5R6	6.3 × 11	52	6.3 × 11	50	8 × 11.5	62	10 × 12.5	64	10 × 16	58		
				▲ 8 × 9	56								
6.8	6R8	6.3 × 11	55	8 × 9	62	8 × 11.5	68	10 × 16	85	10 × 16	62		
8.2	8R2			8 × 9	66	10 × 9	76	10 × 16	88	10 × 20	88		
10	100	8 × 9	70	8 × 11.5	80	10 × 12.5	90			10 × 20	92		
12	120			10 × 9	88	10 × 12.5	97						
15	150	8 × 11.5	92									12.5 × 20	140
		▲ 10 × 9	95										
18	180			10 × 12.5	113	10 × 16	129						
22	220	10 × 12.5	121									12.5 × 25	240
												▲ 16 × 20	292
27	270			10 × 16	149							16 × 20	305
33	330	10 × 16	158									16 × 25	392
												▲ 18 × 20	312
47	470											18 × 25	480
68	680											18 × 31.5	520

※: Rated ripple current (Arms) at 105°C 120Hz

▲: In this case, [6] will be put at 12th digit of type numbering system.

• Frequency coefficient of rated ripple current

Frequency Cap.(μF)	120Hz	1kHz	10kHz	100kHz or more
1 to 5.6μF	1.00	1.60	1.80	2.00
6.8 to 18μF	1.00	1.50	1.70	1.90
22 to 68μF	1.00	1.40	1.60	1.80