

General-purpose CMOS Logic IC Series (BU4S,BU4000B Series)

# High Voltage CMOS Logic ICs

## <Function Logic>


**BU4015B,BU4015BF,BU4021B,BU4021BF,  
 BU4094BC,BU4094BCF,BU4094BCFV,BU4538B,BU4028B**

No.09050EAT04

### ●Description

BU4015B series ICs are 4-stage static shift registers, each consisting of 2 circuits. The D flip-flops of each stage share a common reset input, enabling asynchronous reset at any time.

BU4021B series ICs are 8-bit static shift registers configured with 8 register cells, each of which has parallel input.

Control of the parallel/serial input (P/S) enables serial input/output with clock synchronization and well as parallel input/serial output conversions.

BU4094BC series ICs are shift/store registers, each consisting of an 8-bit shift register and an 8-bit latch. Output can be held in the data transfer mode because the data read into the shift register can be latched by the asynchronous strobe input,

The BU4538B IC is a monostable multivibrator that can be reset and retrigged from either edge of an input pulse.

A wide range of accurate output pulse widths is available because the output pulse width and accuracy are determined by the external timing constants Cx and Rx.

The BU4028B IC is a decoder which converts BCD signals into decimal signals.

Of the 10 outputs (Q0 ~ Q9), those corresponding to the input codes A-D are set to "H", while the others are set to "L".

### ●Features

- 1) Low power consumption
- 2) Wide operating supply voltage range
- 3) High impedance
- 4) High fan out
- 5) L-TTL2 and LS-TTL1 inputs can be driven directly.

### ●Applications

BU4015B: serial / parallel data conversion and ring counter.


BU4021B: control circuits, timing circuits and as a general purpose register requiring high degree of noise tolerance.

BU4094BC: series/parallel data conversion and data receivers.

BU4538B: can obtain the output pulse amplitude with improved accuracy by external capacity and resistance.

BU4028B: code conversion, address decoding, memory selection control, demultiplexing or readout and decoding, etc.

### ●Lineup

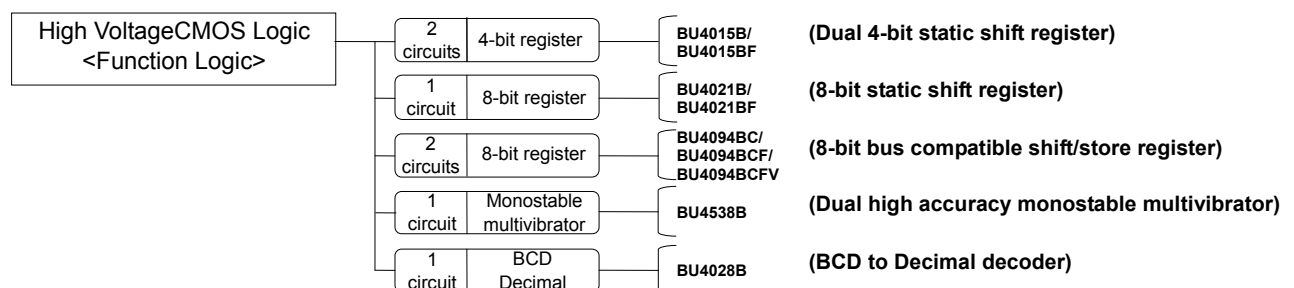


●Absolute Maximum Ratings

| Parameter                    | Symbol | Limit           |         |          |         |         | Unit |
|------------------------------|--------|-----------------|---------|----------|---------|---------|------|
|                              |        | BU4015B         | BU4021B | BU4094BC | BU4538B | BU4028B |      |
| Power Supply Voltage         | VDD    | -0.3 to 18      |         |          |         |         | V    |
| Supply Current               | Iin    | ±10             |         |          |         |         | mA   |
| Operating Temperature        | Topr   | -40 to 85       |         |          |         |         | °C   |
| Storage Temperature          | Tstg   | -55 to 150      |         |          |         |         | °C   |
| Input Voltage                | VIN    | -0.3 to VDD+0.3 |         |          |         |         | V    |
| Maximum Junction Temperature | Tjmax  | 150             |         |          |         |         | °C   |

●Recommended Operating Conditions

| Parameter              | Symbol | Limit                        |         |          |         |         | Unit |
|------------------------|--------|------------------------------|---------|----------|---------|---------|------|
|                        |        | BU4015B                      | BU4021B | BU4094BC | BU4538B | BU4028B |      |
| Operating Power Supply | VDD    | 3 to 16 (3 to 18V @BU4094BC) |         |          |         |         | V    |
| Input Voltage          | VIN    | 0 to VDD                     |         |          |         |         | V    |


●Thermal Derating Curve

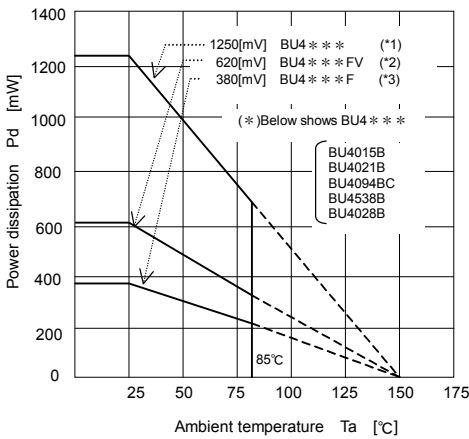


| (*1) | (*2) | (*3) | Unit  |
|------|------|------|-------|
| 10.0 | 5.0  | 3.1  | mW/°C |

When used at Ta=25°C or higher the value above is reduced per 1°C. Power Dissipation is measured by using the sample mounted on a 70mm×70mm×1.6mm FR4 glass-epoxy PCB (copper area is less than 3%)

●Input / Output Equivalent Circuits



<Input>



<Output>

●Electrical Characteristics(BU4015B)

DC Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C])

| Parameter             | Symbol          | Limits |     |      | Unit | VDD[V] | Condition     | Fig.No |
|-----------------------|-----------------|--------|-----|------|------|--------|---------------|--------|
|                       |                 | Min    | Typ | Max  |      |        |               |        |
| Input 'H' voltage     | VIH             | 3.5    | —   | —    | V    | 5      | —             | —      |
|                       |                 | 7.0    | —   | —    |      | 10     |               |        |
|                       |                 | 11.0   | —   | —    |      | 15     |               |        |
| Input 'L' voltage     | VIL             | —      | —   | 1.5  | V    | 5      | —             | —      |
|                       |                 | —      | —   | 3.0  |      | 10     |               |        |
|                       |                 | —      | —   | 4.0  |      | 15     |               |        |
| Input 'H' current     | I <sub>IH</sub> | —      | —   | 0.3  | μA   | 15     | VIH=15[V]     | —      |
| Input 'L' current     | I <sub>IL</sub> | —      | —   | -0.3 | μA   | 15     | VIL=0[V]      | —      |
| Output 'H' voltage    | VOH             | 4.95   | —   | —    | V    | 5      | IO=0[mA]      | 1      |
|                       |                 | 9.95   | —   | —    |      | 10     |               |        |
|                       |                 | 14.95  | —   | —    |      | 15     |               |        |
| Output 'L' voltage    | VOL             | —      | —   | 0.05 | V    | 5      | IO=0[mA]      | 2      |
|                       |                 | —      | —   | 0.05 |      | 10     |               |        |
|                       |                 | —      | —   | 0.05 |      | 15     |               |        |
| Output 'H' current    | IOH             | -0.16  | —   | —    | mA   | 5      | VOH=4.6[V]    | 1      |
|                       |                 | -0.4   | —   | —    |      | 5      | VOH=9.5[V]    |        |
|                       |                 | -1.2   | —   | —    |      | 15     | VOH=13.5[V]   |        |
| Output 'L' current    | IOL             | 0.44   | —   | —    | mA   | 5      | VOL=0.4[V]    | 2      |
|                       |                 | 1.1    | —   | —    |      | 10     | VOL=0.5[V]    |        |
|                       |                 | 3.0    | —   | —    |      | 15     | VOL=1.5[V]    |        |
| Static supply current | IDD             | —      | —   | 20   | μA   | 5      | VI=VSS or GND | —      |
|                       |                 | —      | —   | 40   |      | 10     |               |        |
|                       |                 | —      | —   | 80   |      | 15     |               |        |

Switching Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter                            | Symbol                                       | Limits |     |     | Unit | VDD[V] | Condition | Fig.No |
|--------------------------------------|----------------------------------------------|--------|-----|-----|------|--------|-----------|--------|
|                                      |                                              | Min    | Typ | Max |      |        |           |        |
| Output rising time                   | t <sub>TLH</sub>                             | —      | 180 | —   | ns   | 5      | —         | —      |
|                                      |                                              | —      | 90  | —   |      | 10     |           |        |
|                                      |                                              | —      | 65  | —   |      | 15     |           |        |
| Output falling time                  | T <sub>THL</sub>                             | —      | 100 | —   | ns   | 5      | —         | —      |
|                                      |                                              | —      | 50  | —   |      | 10     |           |        |
|                                      |                                              | —      | 40  | —   |      | 15     |           |        |
| Propagation delay time<br>CLOCK, D→Q | t <sub>PLH</sub><br>t <sub>PHL</sub>         | —      | 310 | —   | ns   | 5      | —         | 3・4    |
|                                      |                                              | —      | 125 | —   |      | 10     |           |        |
|                                      |                                              | —      | 90  | —   |      | 15     |           |        |
| Propagation delay time<br>RESET→Q    | t <sub>PLH</sub><br>t <sub>PHL</sub>         | —      | 460 | —   | ns   | 5      | —         | 5・6    |
|                                      |                                              | —      | 180 | —   |      | 10     |           |        |
|                                      |                                              | —      | 120 | —   |      | 15     |           |        |
| Set up time                          | T <sub>su</sub>                              | —      | 100 | —   | ns   | 5      | —         | 7・8    |
|                                      |                                              | —      | 50  | —   |      | 10     |           |        |
|                                      |                                              | —      | 40  | —   |      | 15     |           |        |
| Minimum clock pulse<br>width         | t <sub>W</sub> (CLK)                         | —      | 185 | —   | ns   | 5      | —         | 9      |
|                                      |                                              | —      | 85  | —   |      | 10     |           |        |
|                                      |                                              | —      | 55  | —   |      | 15     |           |        |
| Minimum reset pulse<br>width         | t <sub>W</sub> (RST)                         | —      | 200 | —   | ns   | 5      | —         | 10     |
|                                      |                                              | —      | 80  | —   |      | 10     |           |        |
|                                      |                                              | —      | 60  | —   |      | 15     |           |        |
| Maximum clock<br>frequency           | f (CLK)<br>Max.                              | —      | 20  | —   | MHz  | 5      | —         | —      |
|                                      |                                              | —      | 6.0 | —   |      | 10     |           |        |
|                                      |                                              | —      | 7.5 | —   |      | 15     |           |        |
| Maximum clock<br>rising/falling time | t <sub>r</sub> (CLK)<br>t <sub>f</sub> (CLK) | —      | 100 | —   | μs   | 5      | —         | —      |
|                                      |                                              | —      | 40  | —   |      | 10     |           |        |
|                                      |                                              | —      | 15  | —   |      | 15     |           |        |
| Input capacitance                    | C <sub>IN</sub>                              | —      | 5   | —   | pF   | —      | —         | —      |

●Electrical Characteristics(BU4021B)

DC Characteristics (Unless otherwise noted VSS=0[V],Ta=25[°C])

| Parameter             | Symbol          | Limits |     |      | Unit | VDD[V] | Condition     | Fig.No |
|-----------------------|-----------------|--------|-----|------|------|--------|---------------|--------|
|                       |                 | Min    | Typ | Max  |      |        |               |        |
| Input 'H' voltage     | VIH             | 3.5    | —   | —    | V    | 5      | —             | —      |
|                       |                 | 7.0    | —   | —    |      | 10     |               |        |
|                       |                 | 11.0   | —   | —    |      | 15     |               |        |
| Input 'L' voltage     | VIL             | —      | —   | 1.5  | V    | 5      | —             | —      |
|                       |                 | —      | —   | 3.0  |      | 10     |               |        |
|                       |                 | —      | —   | 4.0  |      | 15     |               |        |
| Input 'H' current     | I <sub>IH</sub> | —      | —   | 0.3  | μA   | 15     | VIH=15[V]     | —      |
| Input 'L' current     | I <sub>IL</sub> | —      | —   | -0.3 | μA   | 15     | VIL=0[V]      | —      |
| Output 'H' voltage    | VOH             | 4.95   | —   | —    | V    | 5      | IO=0[mA]      | 11     |
|                       |                 | 9.95   | —   | —    |      | 10     |               |        |
|                       |                 | 14.95  | —   | —    |      | 15     |               |        |
| Output 'L' voltage    | VOL             | —      | —   | 0.05 | V    | 5      | IO=0[mA]      | 12     |
|                       |                 | —      | —   | 0.05 |      | 10     |               |        |
|                       |                 | —      | —   | 0.05 |      | 15     |               |        |
| Output 'H' current    | IOH             | -0.16  | —   | —    | mA   | 5      | VOH=4.6[V]    | 11     |
|                       |                 | -0.4   | —   | —    |      | 5      | VOH=9.5[V]    |        |
|                       |                 | -1.2   | —   | —    |      | 15     | VOH=13.5[V]   |        |
| Output 'L' current    | IOL             | 0.44   | —   | —    | mA   | 5      | VOL=0.4[V]    | 12     |
|                       |                 | 1.1    | —   | —    |      | 10     | VOL=0.5[V]    |        |
|                       |                 | 3.0    | —   | —    |      | 15     | VOL=1.5[V]    |        |
| Static supply current | IDD             | —      | —   | 20   | μA   | 5      | VI=VDD or GND | —      |
|                       |                 | —      | —   | 40   |      | 10     |               |        |
|                       |                 | —      | —   | 80   |      | 15     |               |        |

Switching Characteristics (Unless otherwise noted VSS=0[V],Ta=25[°C],CL=50[pF])

| Parameter                                             | Symbol             | Limits |     |     | Unit | VDD[V] | Condition | Fig.No |
|-------------------------------------------------------|--------------------|--------|-----|-----|------|--------|-----------|--------|
|                                                       |                    | Min    | Typ | Max |      |        |           |        |
| Output rising time                                    | t <sub>TLH</sub>   | —      | 180 | —   | ns   | 5      | —         | —      |
|                                                       |                    | —      | 90  | —   |      | 10     |           |        |
|                                                       |                    | —      | 65  | —   |      | 15     |           |        |
| Output falling time                                   | t <sub>THL</sub>   | —      | 100 | —   | ns   | 5      | —         | —      |
|                                                       |                    | —      | 50  | —   |      | 10     |           |        |
|                                                       |                    | —      | 40  | —   |      | 15     |           |        |
| “L” to “H”<br>Propagation delay time<br>CLOCK→Q P/S→Q | t <sub>PLH</sub>   | —      | 400 | —   | ns   | 5      | —         | 13・15  |
|                                                       |                    | —      | 170 | —   |      | 10     |           |        |
|                                                       |                    | —      | 115 | —   |      | 15     |           |        |
| “H” to “L”<br>Propagation delay time<br>CLOCK→Q P/S→Q | t <sub>PHL</sub>   | —      | 400 | —   | ns   | 5      | —         | 14・16  |
|                                                       |                    | —      | 170 | —   |      | 10     |           |        |
|                                                       |                    | —      | 115 | —   |      | 15     |           |        |
| Set up time                                           | tsu                | —      | 150 | —   | ns   | 5      | —         | 17     |
|                                                       |                    | —      | 50  | —   |      | 10     |           |        |
|                                                       |                    | —      | 30  | —   |      | 15     |           |        |
| Minimum clock pulse<br>width                          | tw(CLK)            | —      | 150 | —   | ns   | 5      | —         | 19     |
|                                                       |                    | —      | 75  | —   |      | 10     |           |        |
|                                                       |                    | —      | 40  | —   |      | 15     |           |        |
| Maximum clock<br>frequency                            | f (CLK)<br>Max.    | —      | 3.0 | —   | MHz  | 5      | —         | —      |
|                                                       |                    | —      | 6.0 | —   |      | 10     |           |        |
|                                                       |                    | —      | 8.0 | —   |      | 15     |           |        |
| Maximum clock<br>rising/falling time                  | tr(CLK)<br>tf(CLK) | —      | —   | 15  | μs   | 5      | —         | —      |
|                                                       |                    | —      | —   | 5.0 |      | 10     |           |        |
|                                                       |                    | —      | —   | 4.0 |      | 15     |           |        |
| Minimum P/S<br>Control pulse width                    | tw(P/S)            | —      | 150 | —   | ns   | 5      | —         | 20     |
|                                                       |                    | —      | 75  | —   |      | 10     |           |        |
|                                                       |                    | —      | 40  | —   |      | 15     |           |        |
| Input capacitance                                     | CIN                | —      | 5   | —   | pF   | —      | —         | —      |

●Electrical Characteristics(BU4094BC)

DC Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C])

| Parameter             | Symbol          | Limits |     |      | Unit | VDD[V] | Condition     | Fig.No |
|-----------------------|-----------------|--------|-----|------|------|--------|---------------|--------|
|                       |                 | Min    | Typ | Max  |      |        |               |        |
| Input 'H' voltage     | VIH             | 3.5    | —   | —    | V    | 5      | —             | —      |
|                       |                 | 7.0    | —   | —    |      | 10     |               |        |
|                       |                 | 11.0   | —   | —    |      | 15     |               |        |
| Input 'L' voltage     | VIL             | —      | —   | 1.5  | V    | 5      | —             | —      |
|                       |                 | —      | —   | 3.0  |      | 10     |               |        |
|                       |                 | —      | —   | 4.0  |      | 15     |               |        |
| Input 'H' current     | I <sub>IH</sub> | —      | —   | 0.3  | μA   | 15     | VIH=15[V]     | —      |
| Input 'L' current     | I <sub>IL</sub> | —      | —   | -0.3 | μA   | 15     | VIL=0[V]      | —      |
| Output 'H' voltage    | VOH             | 4.95   | —   | —    | V    | 5      | IO=0[mA]      | 21     |
|                       |                 | 9.95   | —   | —    |      | 10     |               |        |
|                       |                 | 14.95  | —   | —    |      | 15     |               |        |
| Output 'L' voltage    | VOL             | —      | —   | 0.05 | V    | 5      | IO=0[mA]      | 22     |
|                       |                 | —      | —   | 0.05 |      | 10     |               |        |
|                       |                 | —      | —   | 0.05 |      | 15     |               |        |
| Output 'H' current    | IOH             | -0.44  | —   | —    | mA   | 5      | VOH=4.6[V]    | 21     |
|                       |                 | -1.1   | —   | —    |      | 5      | VOH=9.5[V]    |        |
|                       |                 | -3.0   | —   | —    |      | 15     | VOH=13.5[V]   |        |
| Output 'L' current    | IOL             | 0.44   | —   | —    | mA   | 5      | VOL=0.4[V]    | 22     |
|                       |                 | 1.1    | —   | —    |      | 10     | VOL=0.5[V]    |        |
|                       |                 | 3.0    | —   | —    |      | 15     | VOL=1.5[V]    |        |
| Static supply current | IDD             | —      | —   | 5    | μA   | 5      | VI=VDD or GND | —      |
|                       |                 | —      | —   | 10   |      | 10     |               |        |
|                       |                 | —      | —   | 20   |      | 15     |               |        |

Switching Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter                                             | Symbol                               | Limits   |      |     | Unit | VDD[V] | Condition | Fig.No |
|-------------------------------------------------------|--------------------------------------|----------|------|-----|------|--------|-----------|--------|
|                                                       |                                      | Min      | Typ  | Max |      |        |           |        |
| Output rising time                                    | t <sub>TLH</sub>                     | —        | 100  | 200 | ns   | 5      | —         | —      |
|                                                       |                                      | —        | 50   | 100 |      | 10     |           |        |
|                                                       |                                      | —        | 40   | 80  |      | 15     |           |        |
| Output falling time                                   | t <sub>THL</sub>                     | —        | 100  | 200 | ns   | 5      | —         | —      |
|                                                       |                                      | —        | 50   | 100 |      | 10     |           |        |
|                                                       |                                      | —        | 40   | 80  |      | 15     |           |        |
| Propagation delay time<br>CLOCK→QS                    | t <sub>PLH</sub><br>t <sub>PHL</sub> | —        | 350  | 600 | ns   | 5      | —         | 23     |
|                                                       |                                      | —        | 125  | 250 |      | 10     |           |        |
|                                                       |                                      | —        | 95   | 190 |      | 15     |           |        |
| Propagation delay time<br>CLOCK→Q'S                   | t <sub>PLH</sub><br>t <sub>PHL</sub> | —        | 230  | 460 | ns   | 5      | —         | 24     |
|                                                       |                                      | —        | 110  | 220 |      | 10     |           |        |
|                                                       |                                      | —        | 75   | 150 |      | 15     |           |        |
| Propagation delay time<br>CLOCK→QN                    | t <sub>PLH</sub><br>t <sub>PHL</sub> | —        | 420  | 840 | ns   | 5      | —         | 25     |
|                                                       |                                      | —        | 195  | 390 |      | 10     |           |        |
|                                                       |                                      | —        | 135  | 270 |      | 15     |           |        |
| Propagation delay time<br>STROBE→QN                   | t <sub>PLH</sub><br>t <sub>PHL</sub> | —        | 290  | 580 | ns   | 5      | —         | 26     |
|                                                       |                                      | —        | 145  | 290 |      | 10     |           |        |
|                                                       |                                      | —        | 100  | 200 |      | 15     |           |        |
| 3state<br>Propagation delay time<br>Output Enable→QN  | t <sub>PHZ</sub><br>t <sub>PZH</sub> | —        | 140  | 280 | ns   | 5      | RL=1[kΩ]  | 27     |
|                                                       |                                      | —        | 75   | 150 |      | 10     |           |        |
|                                                       |                                      | —        | 55   | 110 |      | 15     |           |        |
| 3 state<br>Propagation delay time<br>Output Enable→QN | t <sub>PLZ</sub><br>t <sub>PZL</sub> | —        | 140  | 280 | ns   | 5      | RL=1[kΩ]  | 28     |
|                                                       |                                      | —        | 75   | 150 |      | 10     |           |        |
|                                                       |                                      | —        | 55   | 110 |      | 15     |           |        |
| Minimum set up time<br>DATA→CLOCK                     | tsu                                  | —        | 20   | 125 | ns   | 5      | —         | 29     |
|                                                       |                                      | —        | 8    | 55  |      | 10     |           |        |
|                                                       |                                      | —        | 6    | 35  |      | 15     |           |        |
| Minimum hold time<br>CLOCK →DATA                      | tH                                   | —        | 10   | 40  | ns   | 5      | —         | 30     |
|                                                       |                                      | —        | 10   | 20  |      | 10     |           |        |
|                                                       |                                      | —        | 5    | 15  |      | 15     |           |        |
| Minimum clock pulse<br>width                          | tW(CLK)                              | —        | 100  | 200 | ns   | 5      | —         | 31     |
|                                                       |                                      | —        | 50   | 100 |      | 10     |           |        |
|                                                       |                                      | —        | 40   | 80  |      | 15     |           |        |
| Maximum clock<br>rising/falling time                  | tr(CL)<br>tf(CL)                     | NO Limit |      |     | μs   | 5      | —         | —      |
|                                                       |                                      |          |      |     |      | 10     |           |        |
|                                                       |                                      |          |      |     |      | 15     |           |        |
| Maximum clock<br>frequency                            | f <sub>CL</sub>                      | 1.25     | 2.5  | —   | MHz  | —      | —         | —      |
|                                                       |                                      | 2.5      | 5    | —   |      | —      |           |        |
|                                                       |                                      | 3.0      | 12.5 | —   |      | —      |           |        |
| Minimum<br>strobe pulse width                         | TwH                                  | —        | 100  | 200 | ns   | —      | —         | —      |
|                                                       |                                      | —        | 40   | 80  |      | —      |           |        |
|                                                       |                                      | —        | 35   | 70  |      | —      |           |        |
| Input capacitance                                     | CIN                                  | —        | 5    | —   | pF   | —      | —         | —      |

●Electrical Characteristics(BU4538B)

DC Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C])

| Parameter             | Symbol | Limits |     |      | Unit | VDD[V] | Condition     | Fig.No |
|-----------------------|--------|--------|-----|------|------|--------|---------------|--------|
|                       |        | Min    | Typ | Max  |      |        |               |        |
| Input 'H' voltage     | VIH    | 3.5    | —   | —    | V    | 5      | —             | —      |
|                       |        | 7.0    | —   | —    |      | 10     |               |        |
|                       |        | 11.0   | —   | —    |      | 15     |               |        |
| Input 'L' voltage     | VIL    | —      | —   | 1.5  | V    | 5      | —             | —      |
|                       |        | —      | —   | 3.0  |      | 10     |               |        |
|                       |        | —      | —   | 4.0  |      | 15     |               |        |
| Input 'H' current     | IIH    | —      | —   | 0.3  | μA   | 15     | VIH=15[V]     | —      |
| Input 'L' current     | IIL    | —      | —   | -0.3 | μA   | 15     | VIL=0[V]      | —      |
| Output 'H' voltage    | VOH    | 4.95   | —   | —    | V    | 5      | IO=0[mA]      | —      |
|                       |        | 9.95   | —   | —    |      | 10     |               |        |
|                       |        | 14.95  | —   | —    |      | 15     |               |        |
| Output 'L' voltage    | VOL    | —      | —   | 0.05 | V    | 5      | IO=0[mA]      | —      |
|                       |        | —      | —   | 0.05 |      | 10     |               |        |
|                       |        | —      | —   | 0.05 |      | 15     |               |        |
| Output 'H' current    | IOH    | -0.16  | —   | —    | mA   | 5      | VOH=4.6[V]    | —      |
|                       |        | -0.4   | —   | —    |      | 5      | VOH=9.5[V]    |        |
|                       |        | -1.2   | —   | —    |      | 15     | VOH=13.5[V]   |        |
| Output 'L' current    | IOL    | 0.44   | —   | —    | mA   | 5      | VOL=0.4[V]    | —      |
|                       |        | 1.1    | —   | —    |      | 10     | VOL=0.5[V]    |        |
|                       |        | 3.0    | —   | —    |      | 15     | VOL=1.5[V]    |        |
| Static supply current | IDD    | —      | —   | 20   | μA   | 5      | VI=VDD or GND | —      |
|                       |        | —      | —   | 40   |      | 10     |               |        |
|                       |        | —      | —   | 80   |      | 15     |               |        |

Switching Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter                          | Symbol       | Limits |     |      | Unit | VDD[V] | Condition                 | Fig.No |
|------------------------------------|--------------|--------|-----|------|------|--------|---------------------------|--------|
|                                    |              | Min    | Typ | Max  |      |        |                           |        |
| Output rising time                 | tTLH         | —      | 100 | —    | ns   | 5      | —                         | —      |
|                                    |              | —      | 50  | —    |      | 10     |                           |        |
|                                    |              | —      | 40  | —    |      | 15     |                           |        |
| Output falling time                | tTHL         | —      | 100 | —    | ns   | 5      | —                         | —      |
|                                    |              | —      | 50  | —    |      | 10     |                           |        |
|                                    |              | —      | 40  | —    |      | 15     |                           |        |
| Propagation delay time<br>A,B→Q,Q̄ | tPLH<br>tPHL | —      | 300 | —    | ns   | 5      | —                         | 32・33  |
|                                    |              | —      | 150 | —    |      | 10     |                           |        |
|                                    |              | —      | 100 | —    |      | 15     |                           |        |
| Propagation delay time<br>CD→Q,Q̄  | tPLH<br>tPHL | —      | 250 | —    | ns   | 5      | —                         | 34・35  |
|                                    |              | —      | 125 | —    |      | 10     |                           |        |
|                                    |              | —      | 95  | —    |      | 15     |                           |        |
| Minimum input pulse<br>width       | tWIN         | —      | 50  | —    | ns   | 5      | —                         | 36     |
|                                    |              | —      | 30  | —    |      | 10     |                           |        |
|                                    |              | —      | 25  | —    |      | 15     |                           |        |
| Output pulse width 1               | tWOUT1       | 185    | 200 | 215  | μs   | 5      | CX=2000[pF]<br>RX=100[kΩ] | 38     |
|                                    |              | 185    | 200 | 215  |      | 10     |                           |        |
|                                    |              | 185    | 200 | 215  |      | 15     |                           |        |
| Output pulse width 2               | tWOUT2       | 8.8    | 9.4 | 10.0 | ms   | 5      | CX=0.1[μF]<br>RX=100[kΩ]  | 39     |
|                                    |              | 8.8    | 9.4 | 10.0 |      | 10     |                           |        |
|                                    |              | 8.8    | 9.4 | 10.0 |      | 15     |                           |        |
| Minimum trigger time               | trr          | —      | 0   | —    | ns   | 5      | —                         | —      |
|                                    |              | —      | 0   | —    |      | 10     |                           |        |
|                                    |              | —      | 0   | —    |      | 15     |                           |        |
| Input capacitance                  | CIN          | —      | 5   | —    | pF   | —      | —                         | —      |

●Electrical Characteristics(BU4028B)

DC Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C])

| Parameter             | Symbol | Limits |     |      | Unit | VDD[V] | Condition     | Fig.No |
|-----------------------|--------|--------|-----|------|------|--------|---------------|--------|
|                       |        | Min    | Typ | Max  |      |        |               |        |
| Input 'H' voltage     | VIH    | 3.5    | —   | —    | V    | 5      | —             | —      |
|                       |        | 7.0    | —   | —    |      | 10     |               |        |
|                       |        | 11.0   | —   | —    |      | 15     |               |        |
| Input 'L' voltage     | VIL    | —      | —   | 1.5  | V    | 5      | —             | —      |
|                       |        | —      | —   | 3.0  |      | 10     |               |        |
|                       |        | —      | —   | 4.0  |      | 15     |               |        |
| Input 'H' current     | IIH    | —      | —   | 0.3  | μA   | 15     | VIH=15[V]     | —      |
| Input 'L' current     | IIL    | —      | —   | -0.3 | μA   | 15     | VIL=0[V]      | —      |
| Output 'H' voltage    | VOH    | 4.95   | —   | —    | V    | 5      | IO=0[mA]      | 40     |
|                       |        | 9.95   | —   | —    |      | 10     |               |        |
|                       |        | 14.95  | —   | —    |      | 15     |               |        |
| Output 'L' voltage    | VOL    | —      | —   | 0.05 | V    | 5      | IO=0[mA]      | 41     |
|                       |        | —      | —   | 0.05 |      | 10     |               |        |
|                       |        | —      | —   | 0.05 |      | 15     |               |        |
| Output 'H' current    | IOH    | -0.16  | —   | —    | mA   | 5      | VOH=4.6[V]    | 40     |
|                       |        | -0.4   | —   | —    |      | 5      | VOH=9.5[V]    |        |
|                       |        | -1.2   | —   | —    |      | 15     | VOH=13.5[V]   |        |
| Output 'L' current    | IOL    | 0.44   | —   | —    | mA   | 5      | VOL=0.4[V]    | 41     |
|                       |        | 1.1    | —   | —    |      | 10     | VOL=0.5[V]    |        |
|                       |        | 3.0    | —   | —    |      | 15     | VOL=1.5[V]    |        |
| Static supply current | IDD    | —      | —   | 1    | μA   | 5      | VI=VDD or GND | —      |
|                       |        | —      | —   | 2    |      | 10     |               |        |
|                       |        | —      | —   | 4    |      | 15     |               |        |

Switching Characteristics (Unless otherwise noted VSS=0[V], Ta=25[°C], CL=50[pF])

| Parameter                            | Symbol | Limits |     |     | Unit | VDD[V] | Condition | Fig.No |
|--------------------------------------|--------|--------|-----|-----|------|--------|-----------|--------|
|                                      |        | Min    | Typ | Max |      |        |           |        |
| Output rising time                   | tTLH   | —      | 180 | —   | ns   | 5      | —         | 42     |
|                                      |        | —      | 90  | —   |      | 10     |           |        |
|                                      |        | —      | 65  | —   |      | 15     |           |        |
| Output falling time                  | tTHL   | —      | 100 | —   | ns   | 5      | —         | 43     |
|                                      |        | —      | 50  | —   |      | 10     |           |        |
|                                      |        | —      | 40  | —   |      | 15     |           |        |
| “L” to “H”<br>Propagation delay time | tPLH   | —      | 300 | —   | ns   | 5      | —         | 44     |
|                                      |        | —      | 130 | —   |      | 10     |           |        |
|                                      |        | —      | 90  | —   |      | 15     |           |        |
| “H” to “L”<br>Propagation delay time | tPHL   | —      | 300 | —   | ns   | 5      | —         | 45     |
|                                      |        | —      | 130 | —   |      | 10     |           |        |
|                                      |        | —      | 90  | —   |      | 15     |           |        |
| Input capacitance                    | CIN    | —      | 5   | —   | pF   | —      | —         | —      |

●Electrical Characteristics Curves(BU4015B)

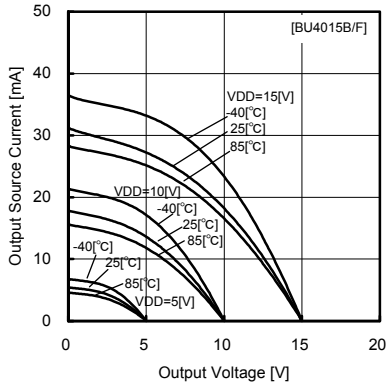


Fig.1 Output source current—voltage

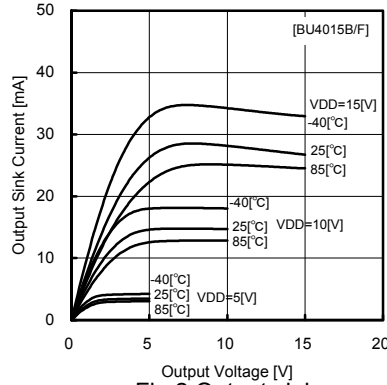


Fig.2 Output sink current—voltage

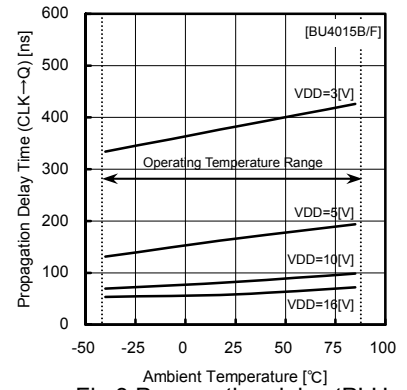


Fig.3 Propagation delay tPLH CLK→Q

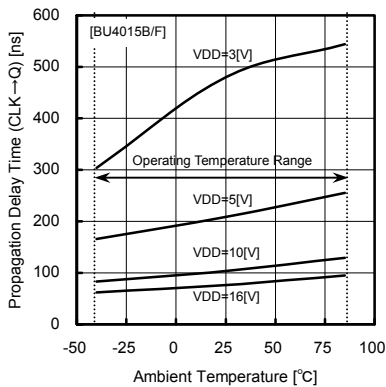


Fig.4 Propagation delay tPHL CLK→Q

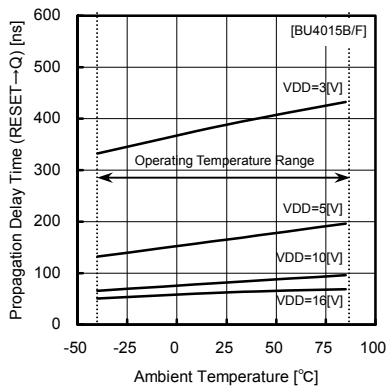


Fig.5 Propagation delay tPLH RESET→Q

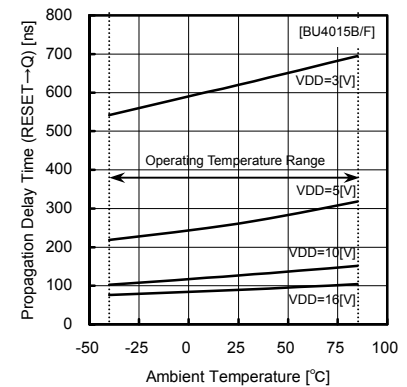


Fig.6 Propagation delay tPHL RESET→Q

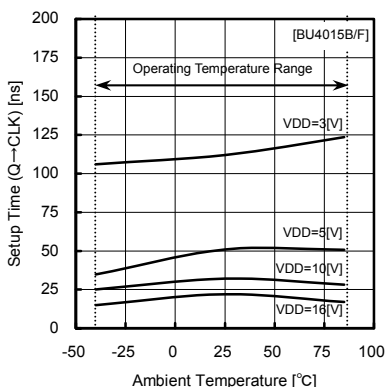


Fig.7 Set up time tsu Q→CLK

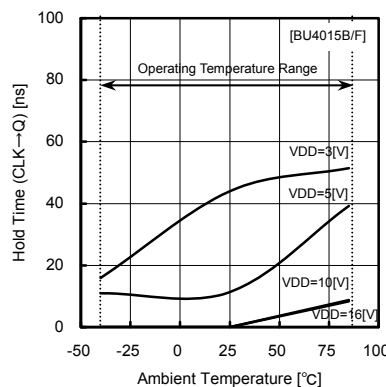


Fig.8 Hold time th CLK→Q

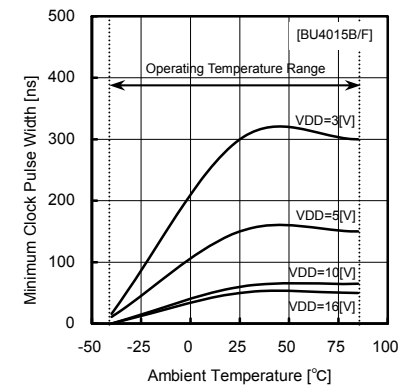


Fig.9 Minimum CLK pulse width


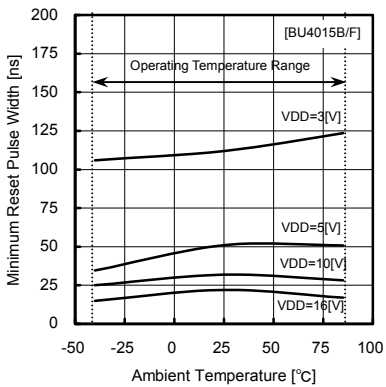


Fig.10 Minimum RESET pulse width

○Switching characteristics

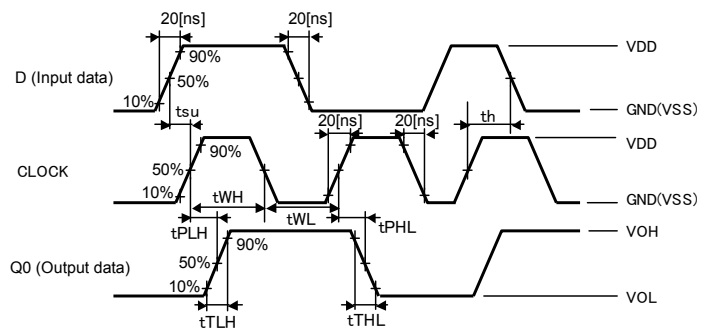

●Electrical Characteristics Curves(BU4021B)

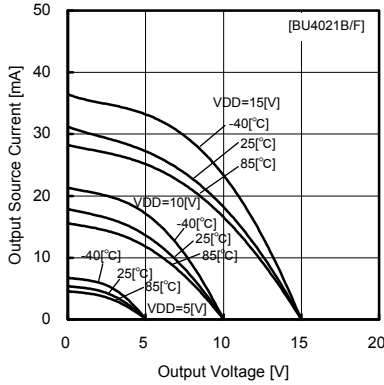


Fig.11 Output source current – voltage

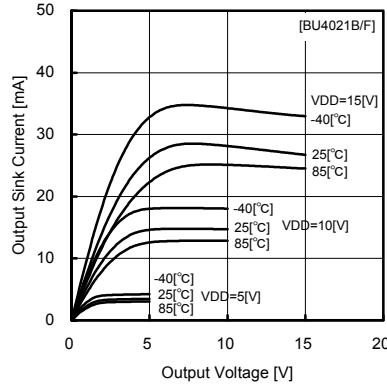


Fig.12 Output sink current – voltage

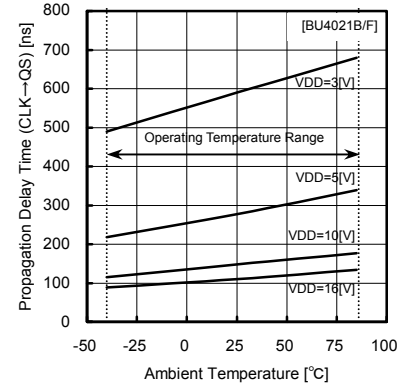


Fig.13 Propagation delay tPLH CLK→QS

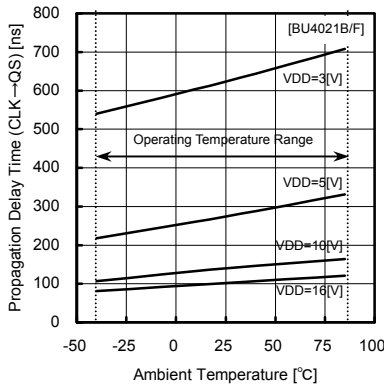


Fig.14 Propagation delay tPHL CLK→QS

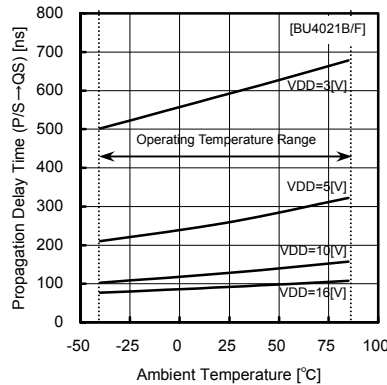


Fig.15 Propagation delay tPLH P/S→QS

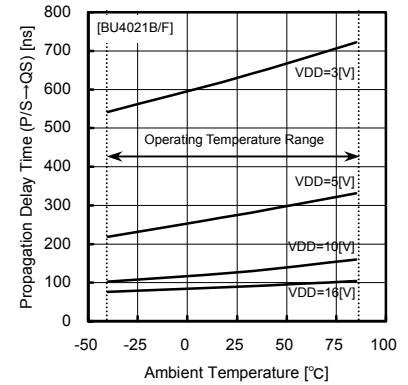


Fig.16 Propagation delay tPHL P/S→QS

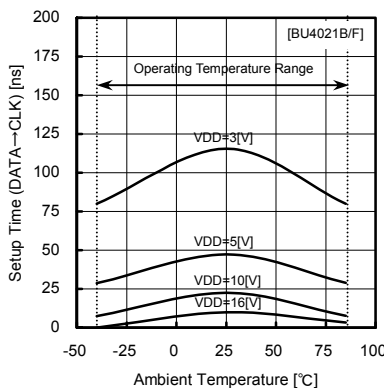


Fig.17 Set up time tsu Q→CLK

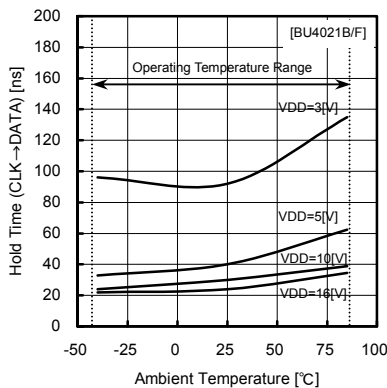


Fig.18 Hold time th CLK→Q

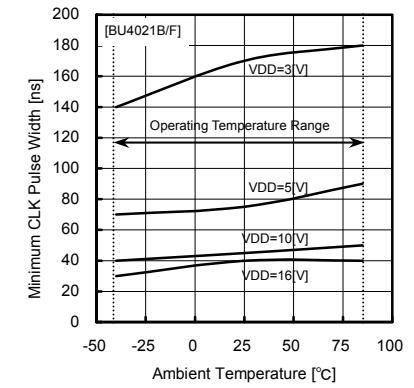


Fig.19 Minimum CLK pulse width


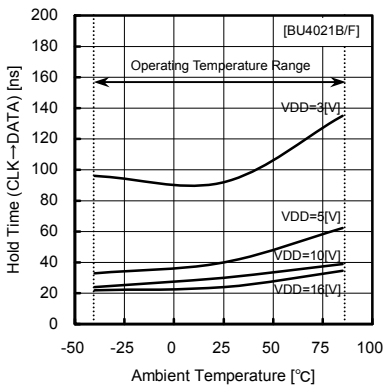


Fig.20 Minimum P/S pulse width

○Switching characteristics

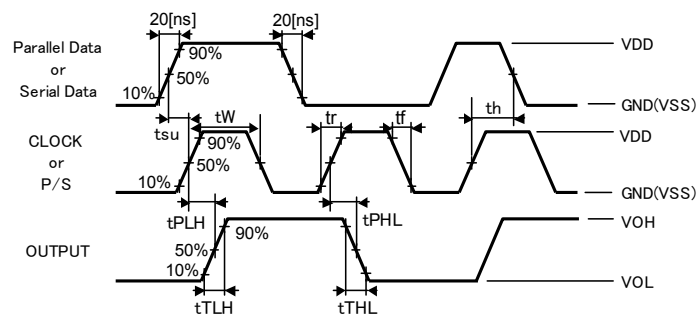

●Electrical Characteristics Curves(BU4094BC)

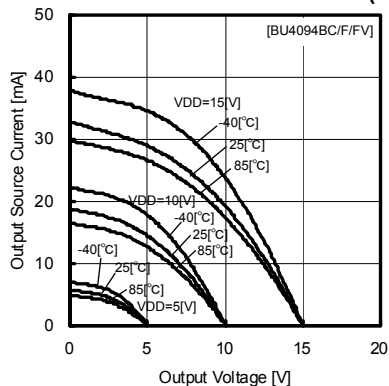


Fig.21 Output source current – voltage

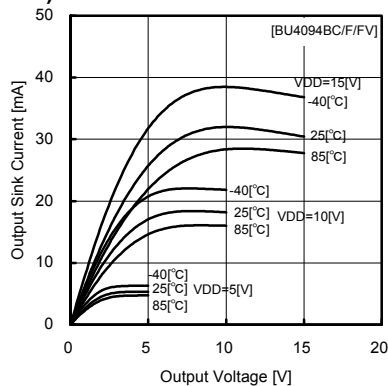


Fig.22 Output sink current – voltage

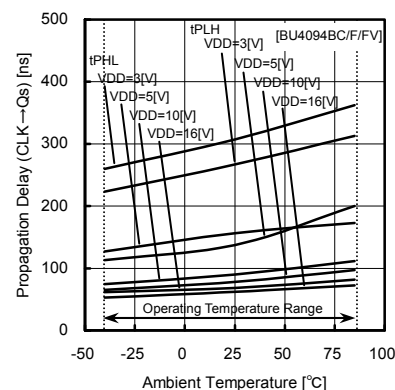


Fig.23 Propagation delay CLK→QS

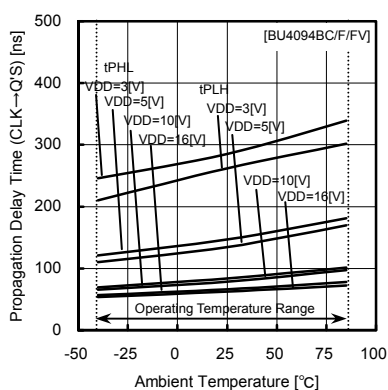


Fig.24 Propagation delay CLK→Q'S

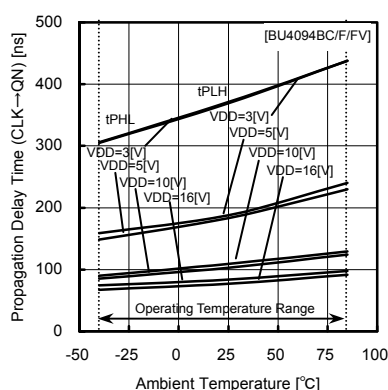


Fig.25 Propagation delay CLK→QN

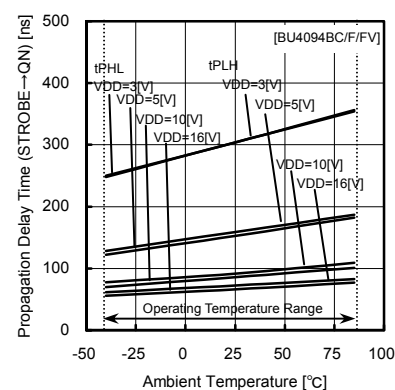


Fig.26 Propagation delay STROBE→QN

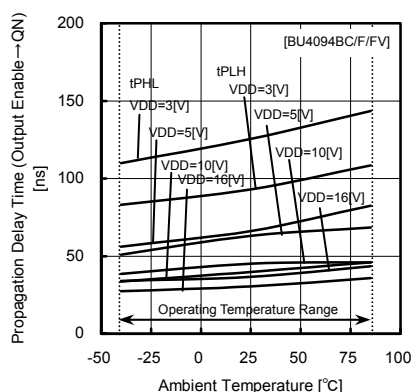


Fig.27 Propagation delay tPHZ Output Enable→QN

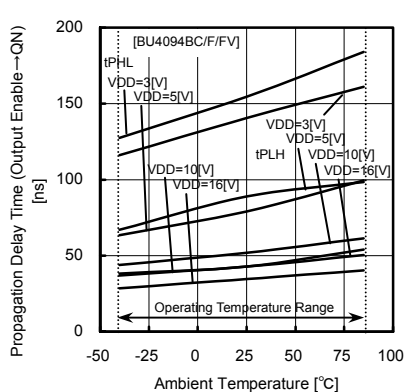


Fig.28 Propagation delay tPLZ Output Enable→QN

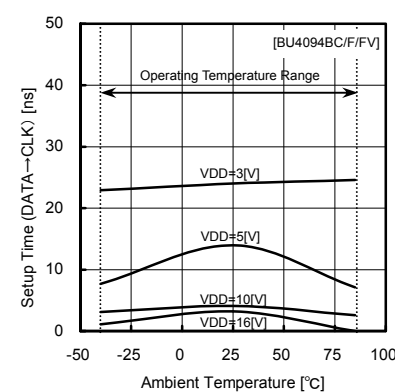


Fig.29 Set up time tsu DATA→CLK

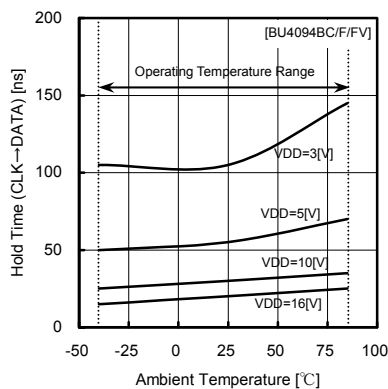


Fig.30 Hold time tH CLK→DATA

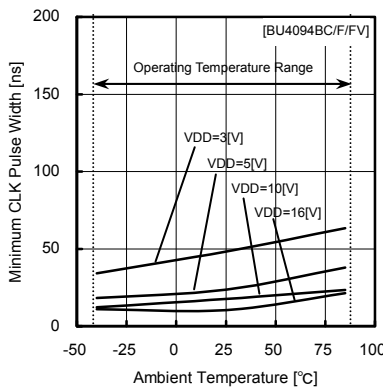


Fig.31 Minimum CLK pulse width tW(CLK)

○Switching characteristics are stated on page 14.

● Electrical Characteristics Curves(BU4538B)

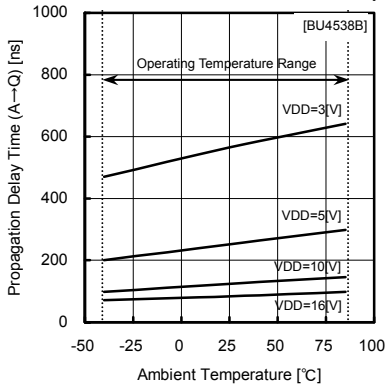


Fig.32 Propagation delay tPLH  
A→Q

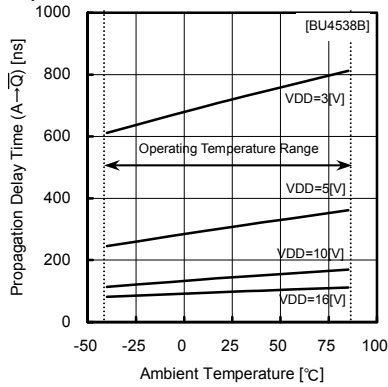


Fig.33 Propagation delay tPHL  
A→Q

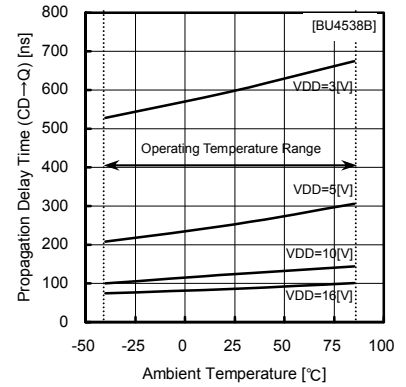


Fig.34 Propagation delay tPHL  
CD→Q

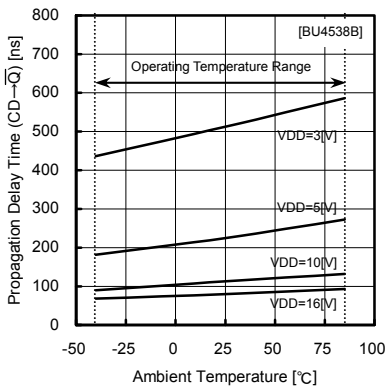


Fig.35 Propagation delay tPLH  
CD→Q

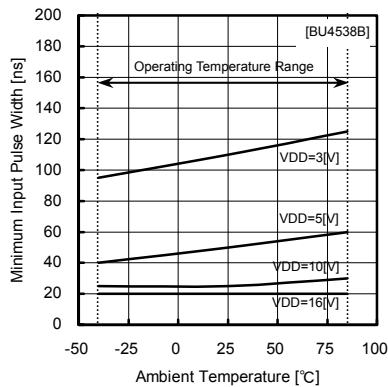


Fig.36 Minimum input pulse width  
tWIN

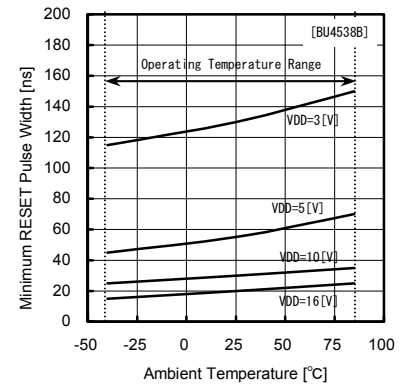


Fig.37 Minimum RESET pulse width  
tRESET

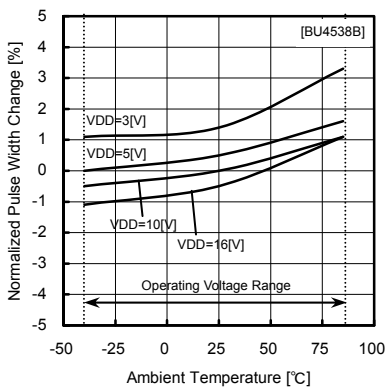


Fig.38 Output pulse width tWOUT1  
(CX=2000[pF],RX=100[kΩ])








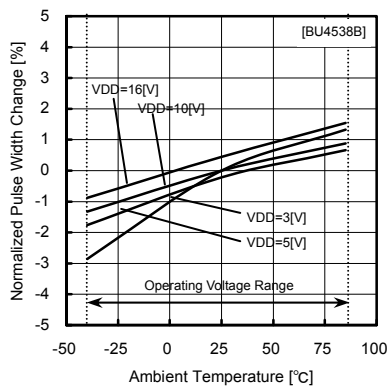


Fig.39 Output pulse width tWOUT2  
(CX=0.1[μF],RX=100[kΩ])

○ Switching Characteristics

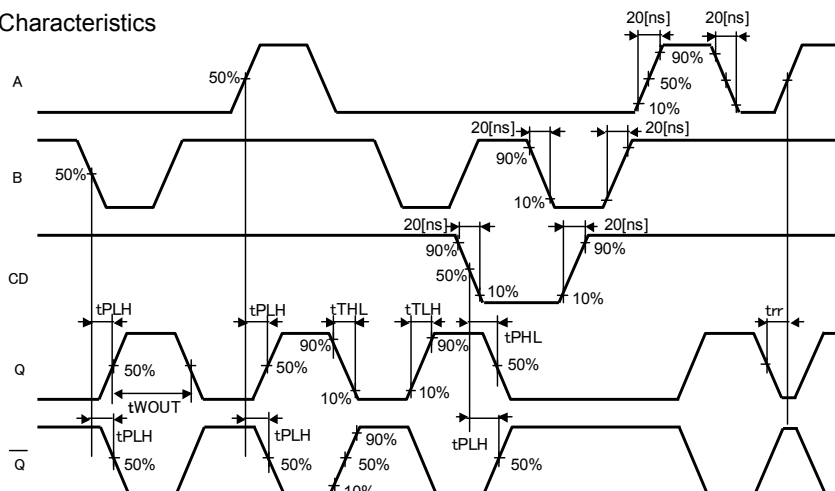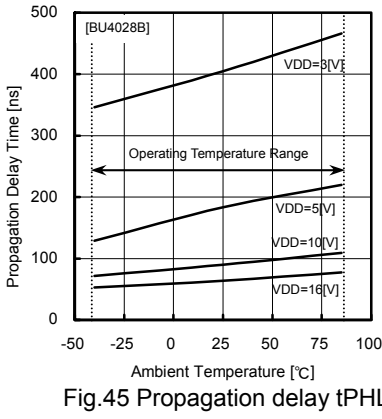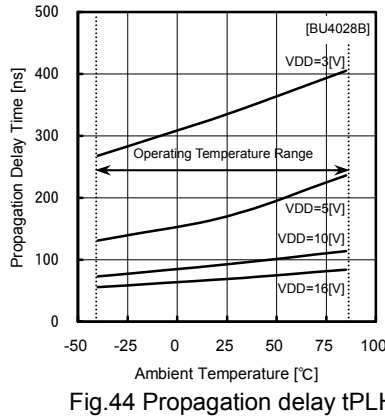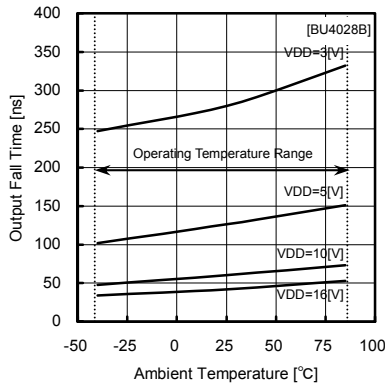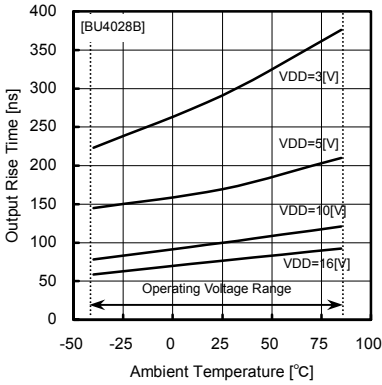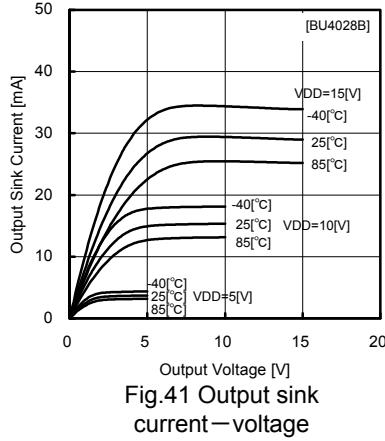

●Reference data(BU4028B)

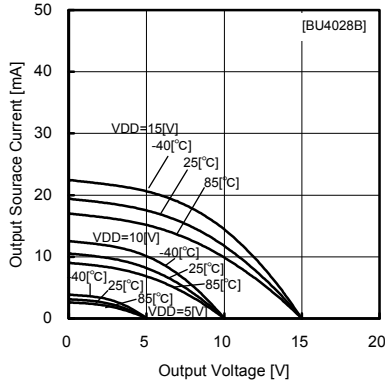

(\*) Switching characteristics is shown in P15.


●Description of BU4015B series model

Function : Dual 4-bit static shift register


1)Description of operation

Dual 4-bit static shift register of BU4015B is configured with 2 independent serial input/parallel output registers of the same 4-state. Each register is provided with an independent clock and reset input having one series data input. Register state is the D type master/slave flip-flop. Data is shifted to the next stage during the rise time of the clock. Each register can be cleared by addition of "H" level to reset.

PIN arrangement

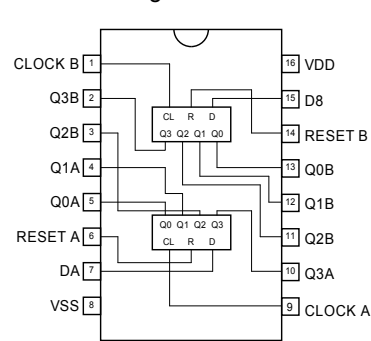

Block diagram

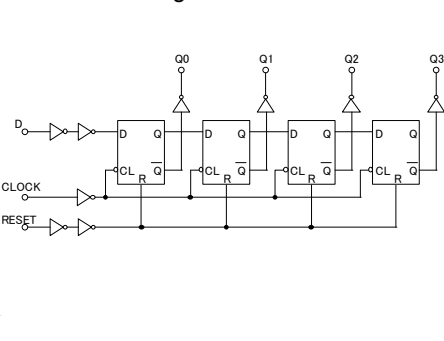

Truth table

| CLOCK | D | RESET | Q0 | Q1        | Q2 | Q3 |
|-------|---|-------|----|-----------|----|----|
|       | L | L     | L  | Q0        | Q1 | Q2 |
|       | H | L     | H  | Q0        | Q1 | Q2 |
|       | X | L     | L  | No Change |    |    |
| X     | X | H     | L  | L         | L  | L  |

X: Don't Care

PIN description

| PIN No. | Symbol | I/O | Function          |
|---------|--------|-----|-------------------|
| 1       | CLOCKB | I   | Clock input (CHB) |
| 2       | Q3B    | O   | Output 3 (CHB)    |
| 3       | Q2A    | O   | Output 2 (CHA)    |
| 4       | Q1A    | O   | Output 1 (CHB)    |
| 5       | Q0A    | O   | Output 0 (CHA)    |
| 6       | RESETA | I   | Reset input (CHA) |
| 7       | DA     | I   | Data input (CHA)  |
| 8       | VSS    | —   | Power supply(-)   |
| 9       | CLOCKA | I   | Clock input (CHA) |
| 10      | Q3A    | O   | Output 3 (CHA)    |
| 11      | Q2B    | O   | Output 2 (CHB)    |
| 12      | Q1B    | O   | Output 1 (CHB)    |
| 13      | Q0B    | O   | Output 0 (CHB)    |
| 14      | RESETB | I   | Reset input (CHB) |
| 15      | DB     | I   | Data input (CHB)  |
| 16      | VDD    | —   | Power supply(+)   |

## ●Description of BU4021B series model

Function: 8-stage static shift register


### 1)Description of operation

BU4021B is an 8-bit static shift register capable of parallel input/series output and series input/series output. In parallel operation, DS (data) being asynchronous with the clock is inputted into each F/F and obtained at output.


In series operation, DS (data) is triggered by clock.

When P/S input level is "H", parallel operation is effective, and when P/S input level is "L", series operation is effective.

PIN arrangement

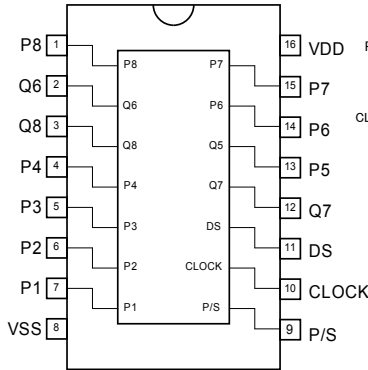

Block diagram

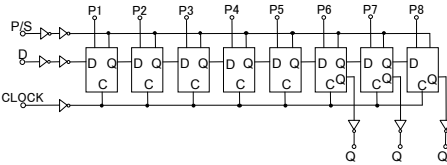

PIN description

| PIN No. | Symbol | I/O | Function              |
|---------|--------|-----|-----------------------|
| 1       | P8     | I   | Parallel data input 8 |
| 2       | Q6     | O   | Output 6              |
| 3       | Q8     | O   | Output 8              |
| 4       | P4     | I   | Parallel data input 4 |
| 5       | P3     | I   | Parallel data input 3 |
| 6       | P2     | I   | Parallel data input 2 |
| 7       | P1     | I   | Parallel data input 1 |
| 8       | VSS    | —   | Power supply(-)       |
| 9       | P/S    | I   | Parallel/Serial       |
| 10      | CLOCK  | I   | Clock input           |
| 11      | DS     | I   | Serial data input     |
| 12      | Q7     | O   | Output 7              |
| 13      | P5     | I   | Parallel data input 5 |
| 14      | P6     | I   | Parallel data input 6 |
| 15      | P7     | I   | Parallel data input 7 |
| 16      | VDD    | —   | Power supply (+)      |

Truth table

| CLOCK | D | RESET | Q0        | Q1 | Q2 | Q3 |
|-------|---|-------|-----------|----|----|----|
| ↓     | L | L     | L         | Q0 | Q1 | Q2 |
| ↓     | H | L     | H         | Q0 | Q1 | Q2 |
| ↓     | X | L     | No Change |    |    |    |
| X     | X | H     | L         | L  | L  | L  |

X: Don't Care

| CLOCK | DS | P/S | Dm | Qm* |
|-------|----|-----|----|-----|
| ↓     | X  | H   | L  | L   |
| ↓     | X  | H   | H  | H   |

X: Don't Care  
\*:Q6,Q7,Q8: outside


## ●Description of BU4094BC series model

Function: Dual 4-bit static shift register

### 1)Description of operation

BU4094BC is an 8-stage shift/store register provided in each stage with a data latch with 3-state output. Data read into shift register is read into the latch during the fall time of asynchronous STROBE input, and in the data transfer mode, output can be held. Data is passed through the latch and outputted when the STROBE is in "H" level. Because the parallel output becomes high impedance when the OUTPUT ENABLE terminal is set to "L" level by 3-state, the parallel output can be connected directly with the 8-bit pass line.


PIN arrangement

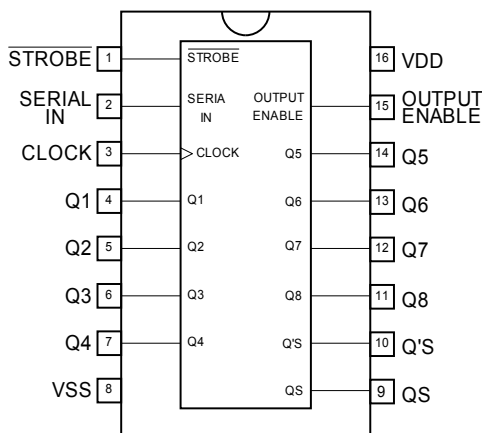

PIN description

| PIN No. | Symbol   | I/O | Function                |
|---------|----------|-----|-------------------------|
| 1       | STROBE   | I   | Latch input             |
| 2       | SERIALIN | I   | Data input              |
| 3       | CLOCK    | I   | Clock input             |
| 4       | Q1       | O   | Parallel data input Q1  |
| 5       | Q2       | O   | Parallel data input Q2  |
| 6       | Q3       | O   | Parallel data input Q3  |
| 7       | Q4       | O   | Parallel data input Q4  |
| 8       | VSS      | —   | Power supply(-)         |
| 9       | Q5       | O   | Serial data output QS   |
| 10      | Q'S      | O   | Serial data output Q'S  |
| 11      | Q8       | O   | Parallel data output Q8 |
| 12      | Q7       | O   | Parallel data output Q7 |
| 13      | Q6       | O   | Parallel data output Q6 |
| 14      | Q5       | O   | Parallel data output Q5 |
| 15      | ENABLE   | I   | Output enable           |
| 16      | VDD      | —   | Power supply (+)        |

### Truth table

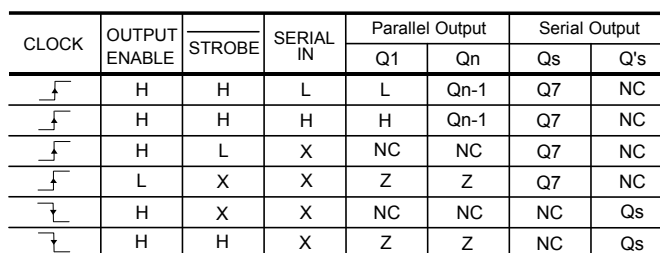[illegible]

| INPUT |   |    | OUTPUT |                |
|-------|---|----|--------|----------------|
| A     | B | CD | Q      | $\overline{Q}$ |
|       | H | H  |        |                |
|       | L | H  | L      | H              |
| H     |   | H  | L      | H              |
| L     |   | H  |        |                |
| X     | H | L  | L      | H              |

| PIN No. | Symbol | I/O | Function                                |
|---------|--------|-----|-----------------------------------------|
| 1       | T1A    | —   | Passive component connection pin 1(CHA) |
| 2       | T2A    | —   | Passive component connection pin 2(CHA) |
| 3       | CDA    | I   | Reset input (CHA)                       |
| 4       | AA     | I   | Input A(CHA)                            |
| 5       | BA     | I   | Input B(CHA)                            |
| 6       | QA     | O   | Output Q(CHA)                           |
| 7       | QAB    | O   | Output QB(CHA)                          |
| 8       | VSS    | —   | Power supply(-)                         |
| 9       | QBB    | O   | Output QB(CHB)                          |
| 10      | QB     | O   | Output Q(CHB)                           |
| 11      | BB     | I   | Input B(CHB)                            |
| 12      | AB     | I   | Input A(CHB)                            |
| 13      | CCB    | I   | Reset input (CHB)                       |
| 14      | T2B    | —   | Passive component connection pin 1(CHB) |
| 15      | T1B    | —   | Passive component connection pin 2(CHB) |
| 16      | VDD    | —   | Power supply (+)                        |


## ●Description of BU4028B series model

Function: BCD to decimal decoder


### 1)Description of operation

BU4028B is a decoder to convert BCD signals into decimal signals. Out of 10 outputs of Q0~Q9, output applicable for the input code of A~D becomes "H" level and all other outputs become "L" level. When the input of D is made to be inhibit input by using 3 inputs of A~C, this product can be used as a 1-OF-8 decoder.

PIN arrangement



Block diagram

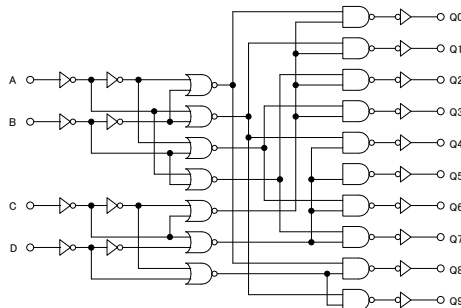


PIN description

| PIN No. | Sym bol | I/ O | Function         |
|---------|---------|------|------------------|
| 1       | Q4      | O    | Output 4         |
| 2       | Q2      | O    | Output 2         |
| 3       | Q0      | O    | Output 0         |
| 4       | Q7      | O    | Output 7         |
| 5       | Q9      | O    | Output 9         |
| 6       | Q5      | O    | Output 5         |
| 7       | Q6      | O    | Output 6         |
| 8       | VSS     | —    | Power supply(-)  |
| 9       | Q8      | O    | Output 8         |
| 10      | A       | I    | Input A          |
| 11      | D       | I    | Input D          |
| 12      | C       | I    | Input C          |
| 13      | B       | I    | Input B          |
| 14      | Q1      | O    | Output 1         |
| 15      | Q3      | O    | Output 3         |
| 16      | VDD     | —    | Power supply (+) |

Truth table

| INPUT |   |   |   | OUTPUT |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|--------|----|----|----|----|----|----|----|----|----|
| D     | C | B | A | Q9     | Q8 | Q7 | Q6 | Q5 | Q4 | Q3 | Q2 | Q1 | Q0 |
| L     | L | L | L | L      | L  | L  | L  | L  | L  | L  | L  | L  | H  |
| L     | L | L | H | L      | L  | L  | L  | L  | L  | L  | L  | H  | L  |
| L     | L | H | L | L      | L  | L  | L  | L  | L  | L  | H  | L  | L  |
| L     | L | H | H | L      | L  | L  | L  | L  | L  | H  | L  | L  | L  |
| L     | H | L | L | L      | L  | L  | L  | L  | H  | L  | L  | L  | L  |
| L     | H | L | H | L      | L  | L  | L  | L  | H  | L  | L  | L  | L  |
| L     | H | H | L | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| L     | H | H | H | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | L | L | L | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | L | L | H | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | L | H | L | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | L | H | H | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | H | L | L | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | H | L | H | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | H | H | L | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |
| H     | H | H | H | L      | L  | L  | L  | L  | L  | L  | L  | L  | L  |

Switching characteristics



## ●Notes for use

### 1. Absolute maximum ratings

An excess in the absolute maximum ratings, such as supply voltage, temperature range of operating conditions, etc., can break down the devices, thus making impossible to identify breaking mode, such as a short circuit or an open circuit. If any over rated values will expect to exceed the absolute maximum ratings, consider adding circuit protection devices, such as fuses.

### 2. Connecting the power supply connector backward

Connecting of the power supply in reverse polarity can damage IC. Take precautions when connecting the power supply lines. An external direction diode can be added.

### 3. Power supply lines

Design PCB layout pattern to provide low impedance GND and supply lines. To obtain a low noise ground and supply line, separate the ground section and supply lines of the digital and analog blocks. Furthermore, for all power supply terminals to ICs, connect a capacitor between the power supply and the GND terminal. When applying electrolytic capacitors in the circuit, not that capacitance characteristic values are reduced at low temperatures.

### 4. GND voltage

The potential of GND pin must be minimum potential in all operating conditions.

### 5. Thermal design

Use a thermal design that allows for a sufficient margin in light of the power dissipation (Pd) in actual operating conditions.

### 6. Inter-pin shorts and mounting errors

Use caution when positioning the IC for mounting on printed circuit boards. The IC may be damaged if there is any connection error or if pins are shorted together.

### 7. Actions in strong electromagnetic field

Use caution when using the IC in the presence of a strong electromagnetic field as doing so may cause the IC to malfunction.

### 8. Testing on application boards

When testing the IC on an application board, connecting a capacitor to a pin with low impedance subjects the IC to stress. Always discharge capacitors after each process or step. Always turn the IC's power supply off before connecting it to or removing it from a jig or fixture during the inspection process. Ground the IC during assembly steps as an antistatic measure. Use similar precaution when transporting or storing the IC.

### 9. Ground Wiring Pattern

When using both small signal and large current GND patterns, it is recommended to isolate the two ground patterns, placing a single ground point at the ground potential of application so that the pattern wiring resistance and voltage variations caused by large currents do not cause variations in the small signal ground voltage. Be careful not to change the GND wiring pattern of any external components, either.

### 10. Unused input terminals


Connect all unused input terminals to VDD or VSS in order to prevent excessive current or oscillation

Insertion of a resistor (100kΩ approx.) is also recommended

●Ordering part number


|          |           |               |                                     |
|----------|-----------|---------------|-------------------------------------|
| B U      | 4 0 1 5 B | F V           | - E 2                               |
| Part No. | Part No.  | Package       | Packaging and forming specification |
|          | 4015B     | None: DIP16   | E2: Embossed tape and reel          |
|          | 4021B     | F : SOP16     | None:Tray,Tube                      |
|          | 4094BC    | FV : SSOP-B16 |                                     |

SOP16

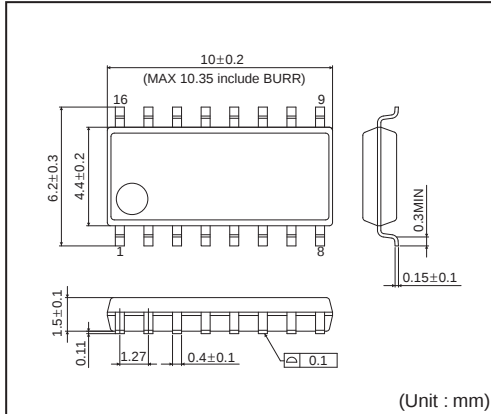


<Tape and Reel information>

|                   |                                                                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                               |
| Quantity          | 2500pcs                                                                                                                                             |
| Direction of feed | E2<br>( The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand ) |

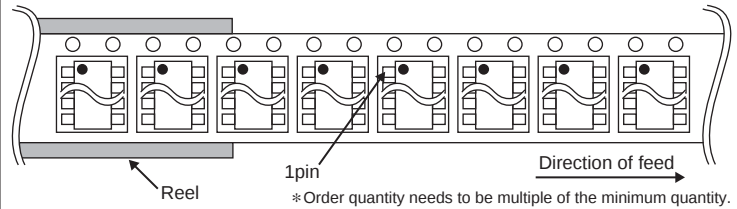


SSOP-B16

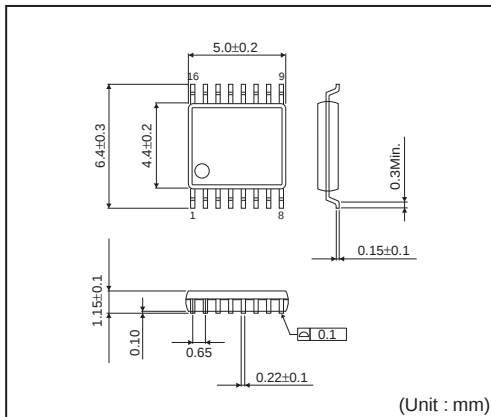


<Tape and Reel information>

|                   |                                                                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Tape              | Embossed carrier tape                                                                                                                               |
| Quantity          | 2500pcs                                                                                                                                             |
| Direction of feed | E2<br>( The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand ) |

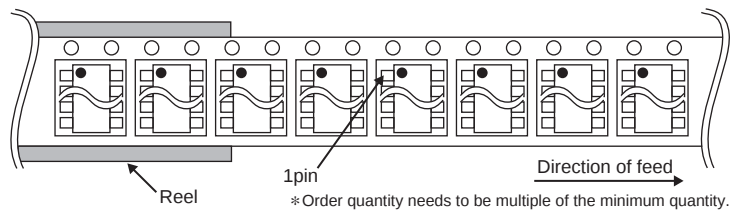


DIP16

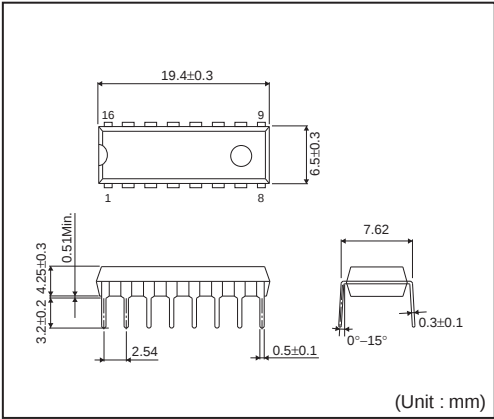

<Tape and Reel information>

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Container         | Tube                                               |
| Quantity          | 1000pcs                                            |
| Direction of feed | Direction of products is fixed in a container tube |

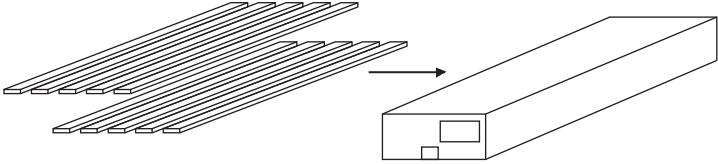

\* Order quantity needs to be multiple of the minimum quantity.

## Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

<http://www.rohm.com/contact/>