


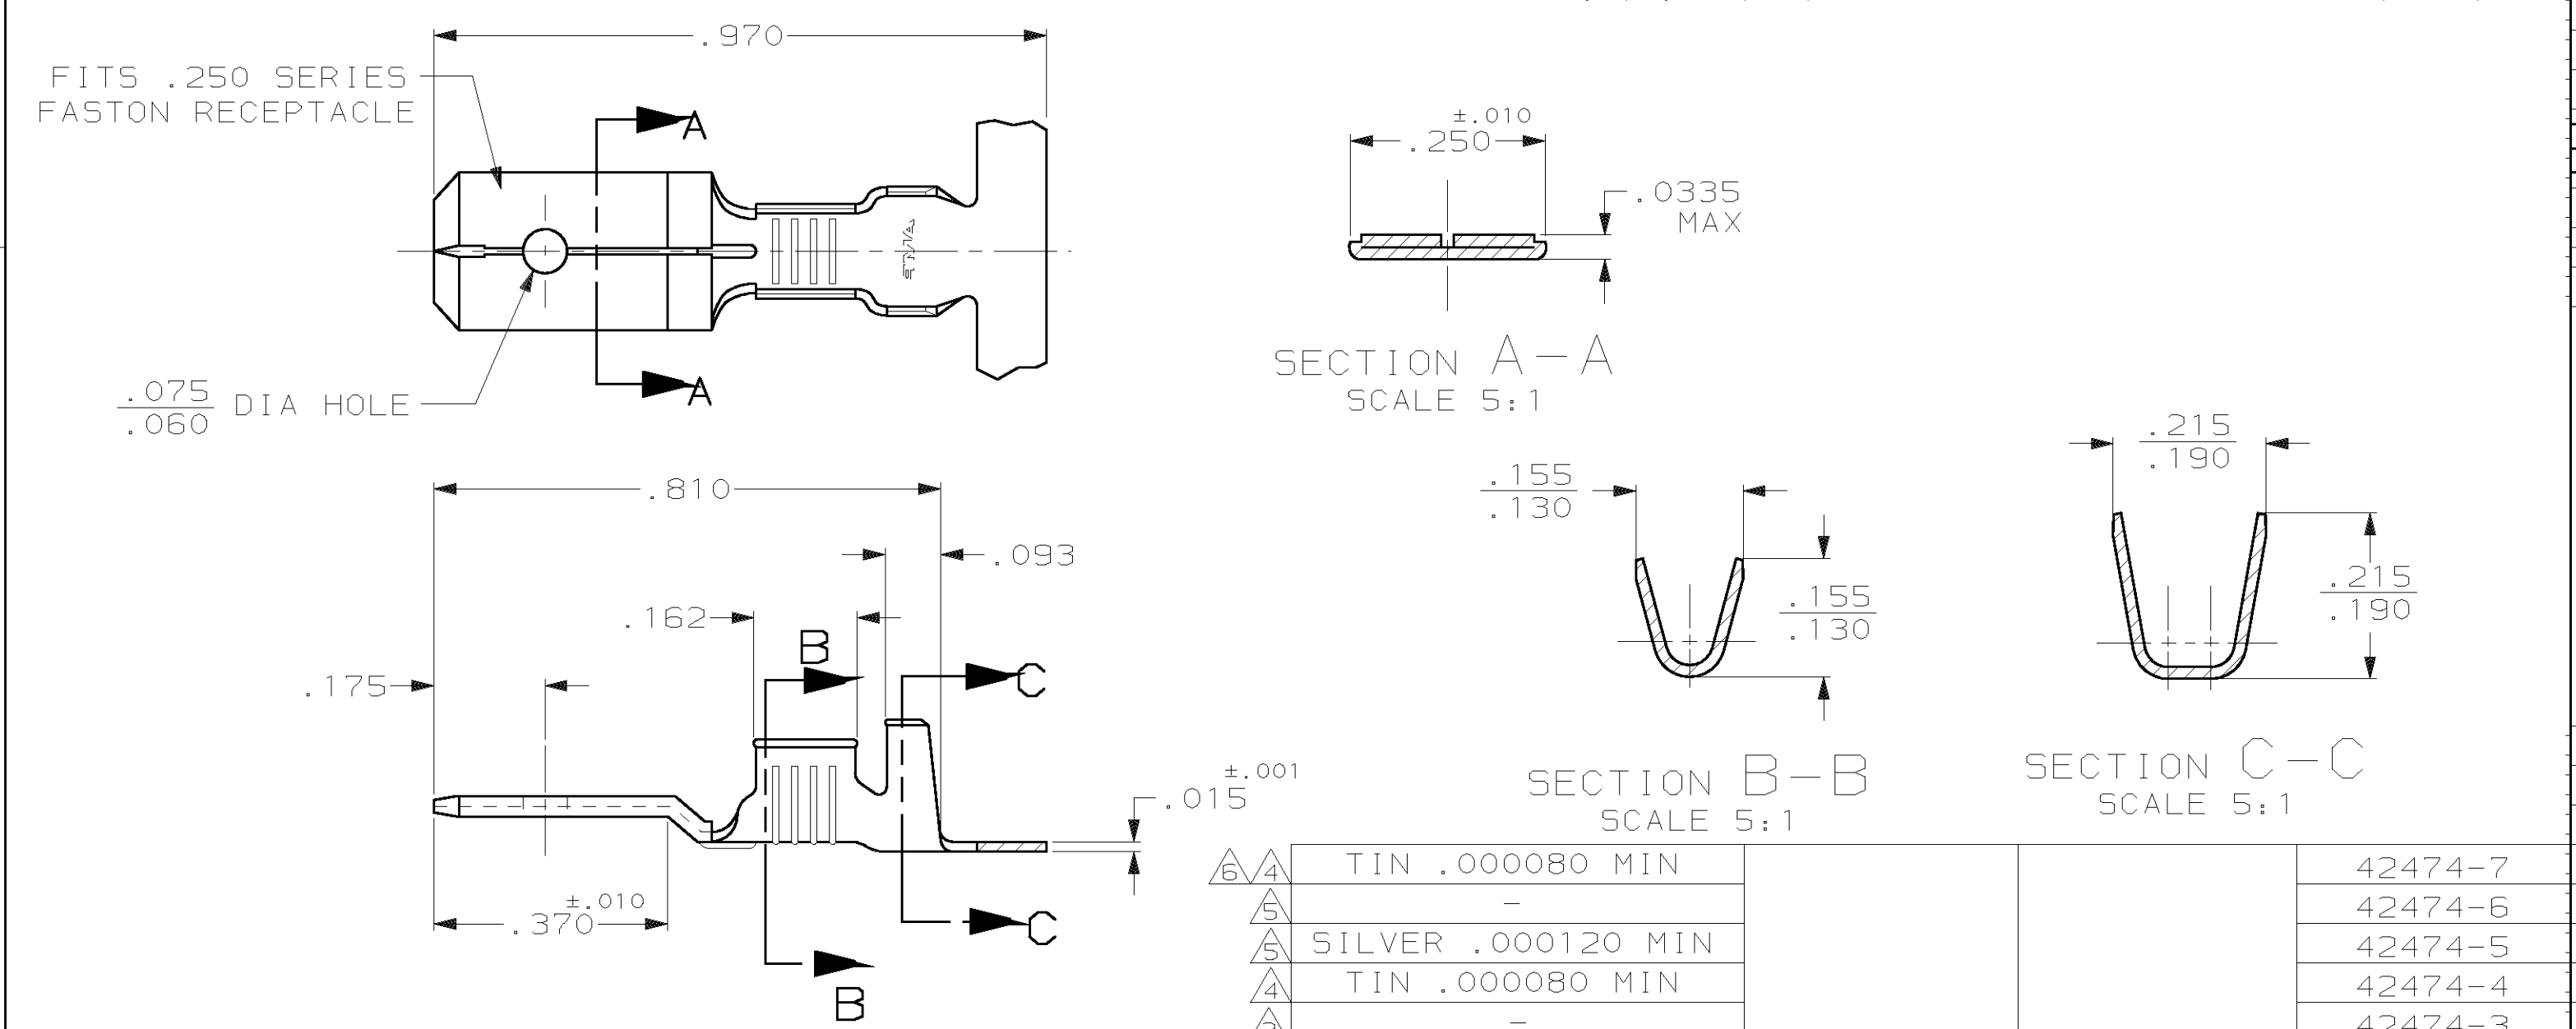

1	CONTINUOUS STRIP ON REELS.
2	FEED TO BE .540±.005.
3	REVERSED REEL OF 42474-1.
4	REVERSED REEL OF 42474-2.
5	FOREIGN PRODUCTION ONLY.
6	LUBRICANT APPLIED AFTER TIN PLATING.

6	4	TIN .000080 MIN			42474-7
	5	-			42474-6
5	5	SILVER .000120 MIN			42474-5
	4	TIN .000080 MIN			42474-4
3	3	-			42474-3
	5	TIN .000080 MIN			42474-2
		-			42474-1
		FINISH	INSULATION RANGE	WIRE SIZE	PART NO
		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -	DR 1/31/91 JR RUTH CHK 1/31/91 MS FEHER APPD 1/31/91 C MEYERS APPD 1/31/91 D REINER PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	AMP AMP Incorporated Harrisburg, PA 17105-3608	
		MATERIAL #2H BRASS		NAME TAB, FASTON,™ .250 SERIES	
		FINISH SEE TABLE		SIZE B	CAGE CODE 00779
				DRAWING NO 42474	
				SCALE 4:1	SHEET 1 OF 1