




13	12	11	10	9	8	7	6	5	4	3	2	1
MATERIAL NUMBER	WIRE AWG	INSULATION O.D.	RING									
845060001	18-14	.053-.134/1.35-3.40	STANDARD BLACK									

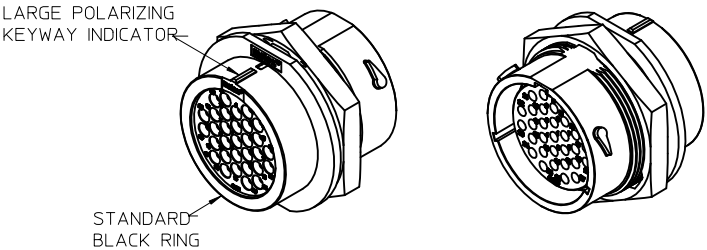



ASSEMBLED VIEW
SCALE 1:1

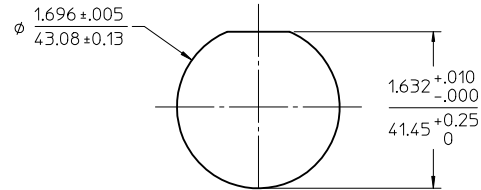

RECOMMENDED MOUNTING HOLE

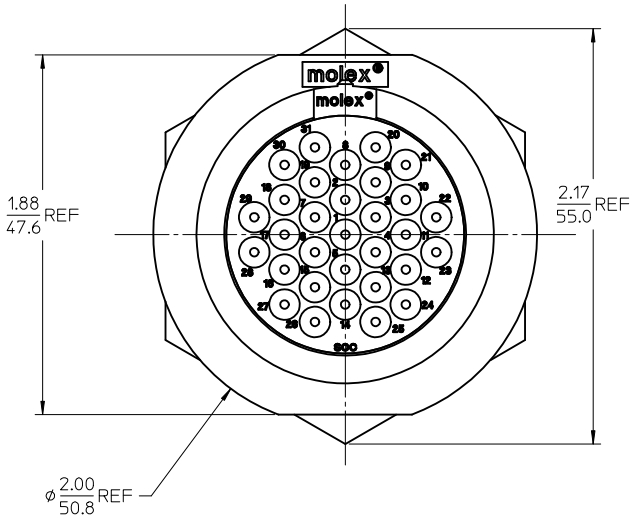


WIRE ENTRY VIEW
SCALE 2:1

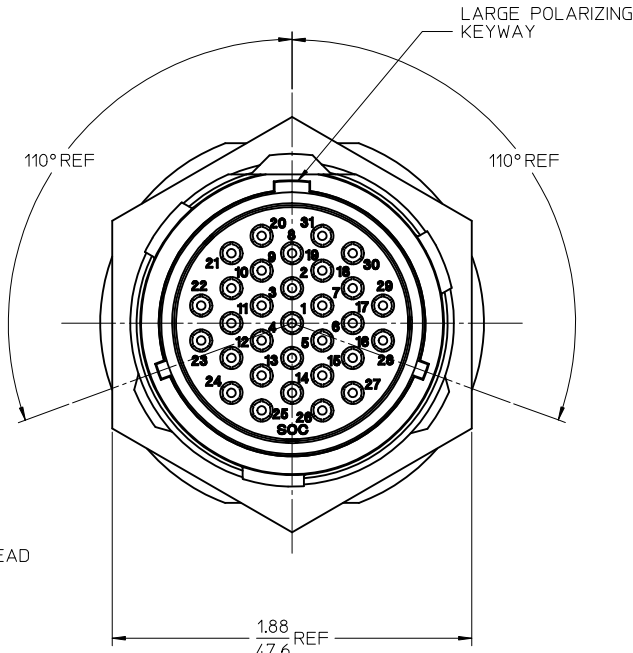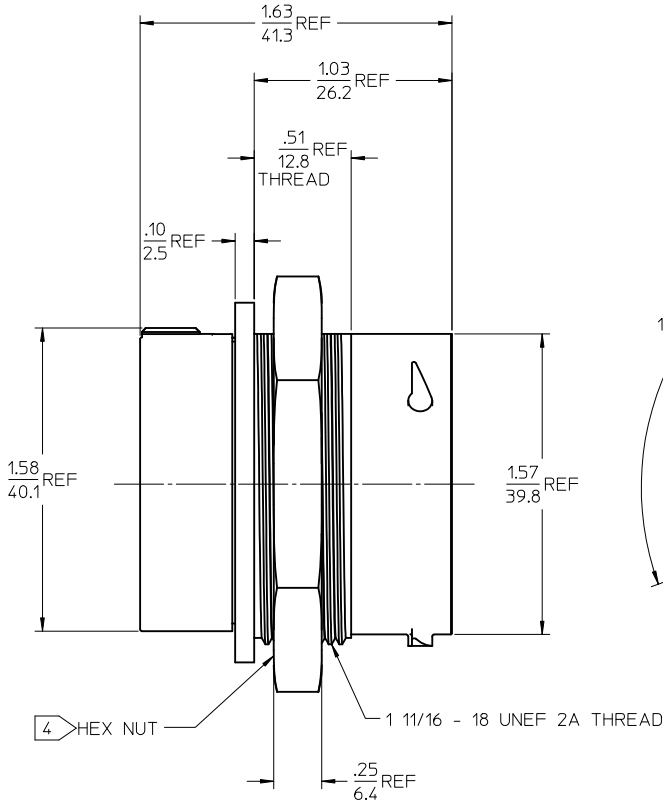


- NOTES:
1. RECOMMENDED PANEL THICKNESS .062/1.58 TO .187/4.75.
 2. USE CONNECTOR WITH FEMALE CRIMP TERMINAL SERIES 84525.
 3. MATES WITH PLUG CONNECTOR SERIES 84505.
 4. HEX NUT SOLD SEPARATELY, MOLEX MATERIAL NUMBER 84506-0012.
 5. ASSEMBLY IS ROHS COMPLIANT.
 6. PACKAGED PER PK-84501-001.

REVISE TERM. NOTE EC NO: WNA2011-0406 DRW:WLEUNG CHKD: APPR:DTITUS 2011/02/01 2011/02/04	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY JPAWLICKI	DATE 2006/6/5	TITLE RECTPT. CONNECTOR ASSEMBLY, 24-31 POS SOCKET TERMINALS  MOLEX INCORPORATED			
			4 PLACES	± ---	± ---	CHECKED BY JPAWLICKI	DATE 2006/6/6				
			3 PLACES	± ---	± ---	APPROVED BY RDEROSS	DATE 2006/6/7				
			2 PLACES	± ---	± .015	MATERIAL NO. 845060001				DOCUMENT NO. SD-84506-001	
			1 PLACE	± 0.38	± ---	SHEET NO. 1 OF 2					
			ANGULAR ± 2 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

13	12	11	10	9
MATERIAL NUMBER	WIRE AWG	INSULATION O.D.	RING	
845060003	18-14	.053-.134/1.35-3.40	EXTENDED LIP BLACK	

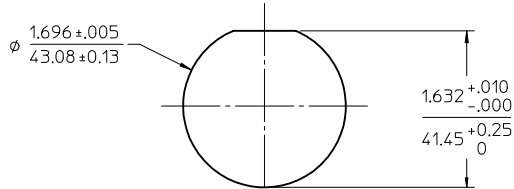


RECOMMENDED MOUNTING HOLE

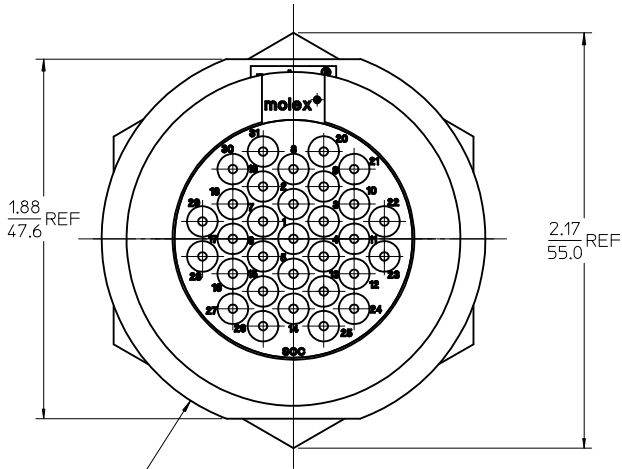


WIRE ENTRY VIEW
SCALE 2:1

NOTES:

1. RECOMMENDED PANEL THICKNESS .062/1.58 TO .187/4.75.
2. USE CONNECTOR WITH FEMALE CRIMP TERMINAL SERIES 84525.
3. MATES WITH PLUG CONNECTOR SERIES 84505.
4. HEX NUT SOLD SEPARATELY, MOLEX MATERIAL NUMBER 84506-0012.
5. USE CONNECTOR WITH STRAIN RELIEF BACKSHELL, MOLEX MATERIAL NO. 84537-0003.
6. ASSEMBLY IS ROHS COMPLIANT.
7. PACKAGED PER PK-84501-001.

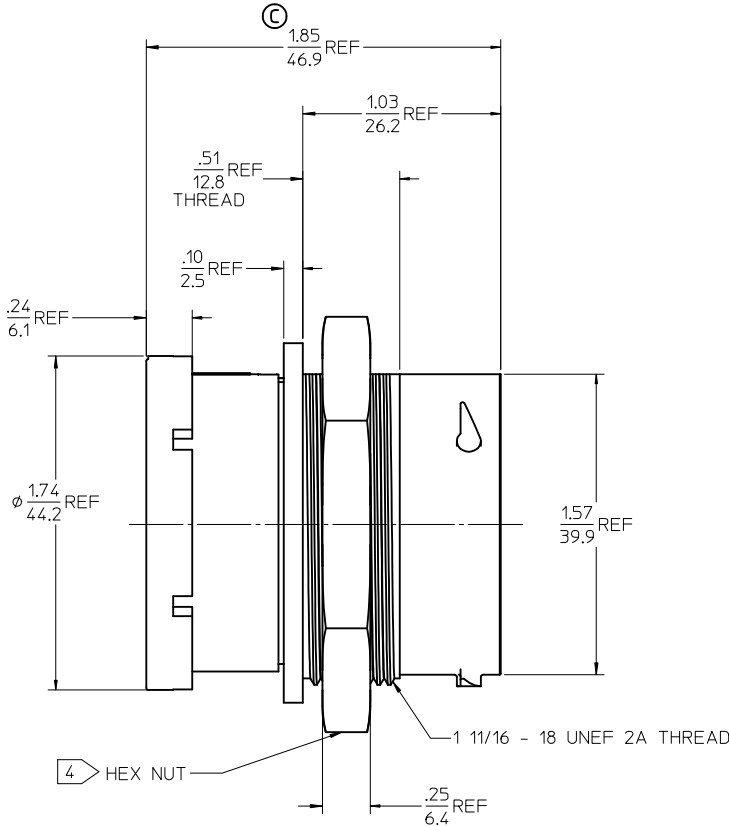


LARGE POLARIZING
KEYWAY INDICATOR

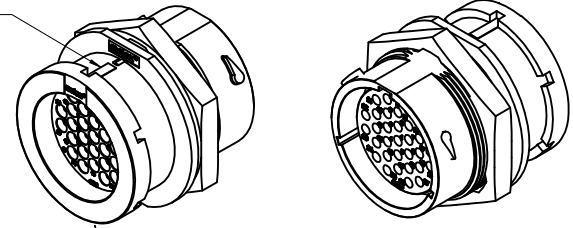

ASSEMBLED VIEW
SCALE 1:1

EXTENDED LIP BLACK RING

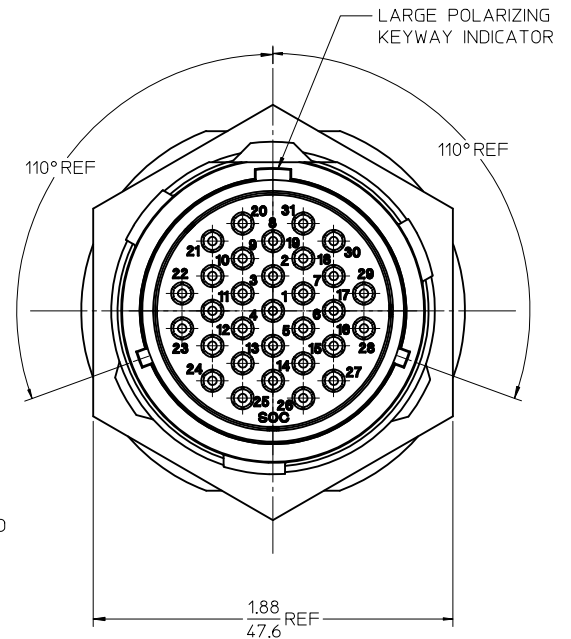

LARGE POLARIZING
KEYWAY INDICATOR

110° REF

110° REF

NOTES:

1. RECOMMENDED PANEL THICKNESS .062/1.58 TO .187/4.75.
2. USE CONNECTOR WITH FEMALE CRIMP TERMINAL SERIES 84525.
3. MATES WITH PLUG CONNECTOR SERIES 84505.
4. HEX NUT SOLD SEPARATELY, MOLEX MATERIAL NUMBER 84506-0012.
5. USE CONNECTOR WITH STRAIN RELIEF BACKSHELL, MOLEX MATERIAL NO. 84537-0003.
6. ASSEMBLY IS ROHS COMPLIANT.
7. PACKAGED PER PK-84501-001.

UPDATE OVERALL LENGTH & REVISE TERM. NOTE REC NO: WNA2011-0406 2011/02/01 DRWN:WLEUNG CHKD: APPR:DT11TUS		QUALITY SYMBOLS ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
4 PLACES ± --- ± ---		3 PLACES ± --- ± ---		2 PLACES ± --- ± .015		1 PLACE ± 0.38 ± ---		ANGULAR ± 2 °		DRAWN BY JPAWLICKI		DATE 2006/6/5	
3 PLACES ± --- ± ---		2 PLACES ± --- ± .015		1 PLACE ± 0.38 ± ---		ANGULAR ± 2 °		CHECKED BY JPAWLICKI		DATE 2006/6/6		APPROVED BY RDEROSS	
2 PLACES ± --- ± .015		1 PLACE ± 0.38 ± ---		ANGULAR ± 2 °		DRAWN BY JPAWLICKI		DATE 2006/6/5		TITLE RECT. CONNECTOR ASSEMBLY, 24-31 POS SOCKET TERMINALS		MOLEX MATERIAL NO. 845060003	
1 PLACE ± 0.38 ± ---		ANGULAR ± 2 °		DRAWN BY JPAWLICKI		DATE 2006/6/6		CHECKED BY JPAWLICKI		DATE 2006/6/6		APPROVED BY RDEROSS	
ANGULAR ± 2 °		DRAWN BY JPAWLICKI		DATE 2006/6/5		TITLE RECT. CONNECTOR ASSEMBLY, 24-31 POS SOCKET TERMINALS		MOLEX MATERIAL NO. 845060003		DOCUMENT NO. SD-84506-001		SHEET NO. 2 OF 2	
DRAWN BY JPAWLICKI		DATE 2006/6/5		TITLE RECT. CONNECTOR ASSEMBLY, 24-31 POS SOCKET TERMINALS		MOLEX MATERIAL NO. 845060003		DOCUMENT NO. SD-84506-001		SHEET NO. 2 OF 2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	