


LEXIC™

Fuse carriers

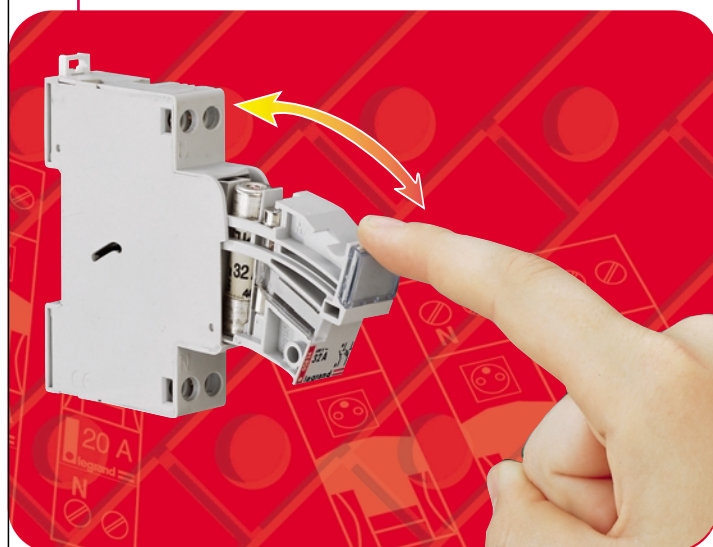

1 COMPLETE SAFETY

- Cartridge totally visible
- Class II insulation along the entire length of the carrier

1 PRACTICAL

Each fuse carrier is designed to take :

- a blow-out indicator
- a padlock

domestic cartridge fuses



Pack	Cat.Nos	Miniature type 5 × 20		
		New model type fast acting - Ceramic body Conform to IEC 60127 - NF EN 60-127 - VDE 0820-1 High rupture capacity (A) For use with dimmers, Viking terminals and emergency lighting units		
		Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps)
10	102 02	0.2	250	1500
10	102 05	0.5		
10	102 06	0.63		
10	102 10	1		
10	102 12	1.25		
10	102 16	1.6		
10	102 20	2		
10	102 25	2.5		
10	102 30	3.15		
10	102 50	5		
10	102 63	6.3	250	500
10	102 96	10 ⁽¹⁾		

Cylindrical

			Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps)	Protected section (mm ²) copper	Colour identi- fication
			6.3 × 23				
10	Without indicator	With indicator	2	250	6 000	1.5	
10	103 02		4				
10	103 04		6				
	103 06						
			8.5 × 23				
10	113 02	114 02	2	250	6 000	1.5	
10	113 04	114 04	4				
10	113 06	114 06	6				
10/100	113 10 ⁽²⁾	114 10 ⁽²⁾	10				
10	113 18		For old 16 A sockets				
			10.3 × 25.8				
10	116 06	117 06	6	250	6 000	2.5	
10	116 10	117 10	10				
10	116 16	117 16	16				
			8.5 × 31.5				
10	123 94		0.5	400	20 000	2.5	
10	123 01		1				
10	123 02	124 02	2				
10	123 04	124 04	4				
10	123 06	124 06	6				
10	123 08	124 08	8				
10/100	123 10		10				
10		124 10	10				
10	123 12	124 12	12	400	20 000	4	
10/100	123 16	124 16	16				
10/100	123 20 ⁽²⁾	124 20 ⁽²⁾	20				
			10.3 × 31.5				
10	126 16	127 16	16	400	20 000	4	
10	126 20	127 20	20				
10	126 25 ⁽²⁾	127 25 ⁽²⁾	25				
			10.3 × 38				
10/100	133 32 ⁽²⁾		32	400	20 000	6	
10		134 32 ⁽²⁾	32				
			Neutral links				
10	123 00		8.5 × 31.5				
10	133 00		10 × 38				

(1) Rating not described by standards
(2) Conform to NF C 61-203