

4




3

2


1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		F	REVISED PER ECR-12-013518	23NOV2012	KH	PD

- 1 CONTINUOUS STRIP ON REELS.
- 2 ACCEPTS [#20-#16] AWG. WIRE SIZE
- 3 INSULATION RANGE TO BE
2.79-4.32 [.110-.170] DIA
- 4 FEED IS 16.38 ± 0.13 [.645±.005]
- 5 MATING TAB THK IS 0.81 ± 0.025 [.032±.001].
- △6 PREPRODUCTION — FASR REQUIRED

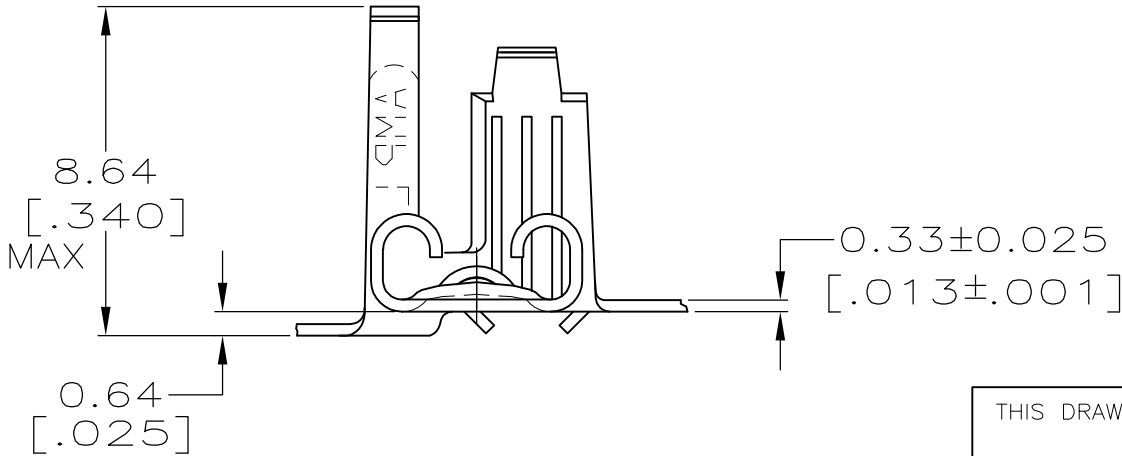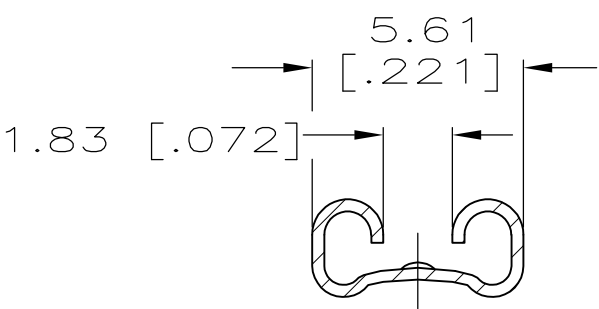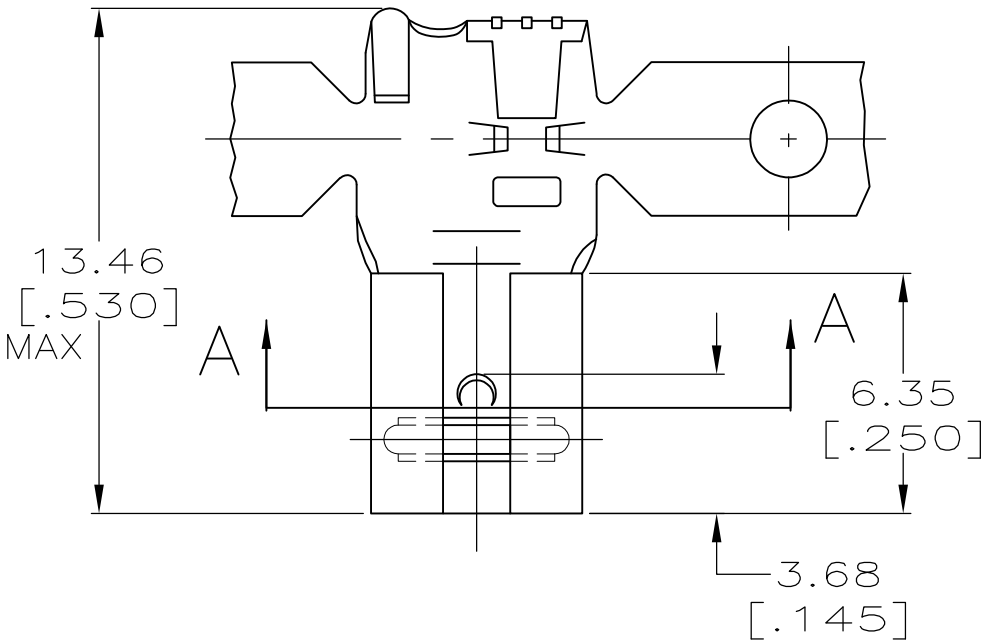

TIN	H04 PHOS BRONZE	△6 63748-3
TIN	BRASS	63748-2
— —	BRASS	63748-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 7/27/93	 TE Connectivity			
		CHK MS FEHER 7/27/93				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R KUZO 7/27/93	NAME RECEPTACLE, LIF, FASTON, FLAG, 4.75 [.187] SERIES			
	0 PLC ± —	PRODUCT SPEC	SIZE		CAGE CODE	DRAWING NO
	1 PLC ± —	—	—		—	RESTRICTED TO
MATERIAL SEE TABLE	2 PLC ± 0.25 [.010]	APPLICATION SPEC	—		—	—
	3 PLC ± —	—	—		—	—
	4 PLC ± —	WEIGHT	—		—	—
	ANGLES ± —	—	—		—	—
		FINISH	—		—	—
		SEE TABLE	—		—	—
		SEE TABLE	—		—	—
CUSTOMER DRAWING				SCALE	SHEET	REV
				5:1	1 OF 1	F