

# ROV07, ROV07H

## 7mm Series Metal Oxide Varistors

www.tycopowercomponents.com

Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

### GENERAL DESCRIPTION

The ROV07-XXX (**R**adial-leaded Metal **O**xide **V**aristor) products are 7mm radial leaded varistor devices suitable for protection of overvoltage transients.

ROV devices can provide protection for a wide variety of power systems against overvoltage faults such as lightning, power contact and power induction. Suitable for a broad range of applications including, but not limited to security, power supplies, surge strips, etc., the ROV device helps to protect valuable equipment from potential power surge damage by clamping high energy, short duration impulses. The ROV devices have high current handling and energy absorption capability and fast response times to help protect against transient faults.


### FEATURES

- Radial leaded
- Broad Varistor voltage and  $V_{rms}$  range
  - Varistor voltage : 18V - 820V
  - $V_{rms}$  voltage : 11V - 510V
- Two surge capability series
  - Standard series, High surge series
- Various lead types
  - Straight, Kinked, Other
- Various packaging options
  - Bulk, Tape & Reel, Ammo Pack
- Helps designers meet the following standards
  - UL, CSA, VDE
- Fast response time
- High current and energy absorption capability

### APPLICATIONS

- Power supplies and power systems
- Line voltage
- Telecommunications systems
- Automotive systems
- Appliances

### TYPICAL APPLICATION SCHEMATIC



\*In some applications, a polymeric PTC device such as a Tyco Electronics PolySwitch device may be used instead of a fuse to provide a preferred solution.


# ROV07, ROV07H

## 7mm Series Metal Oxide Varistors



www.tycopowercomponents.com

Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

### PART NUMBERING

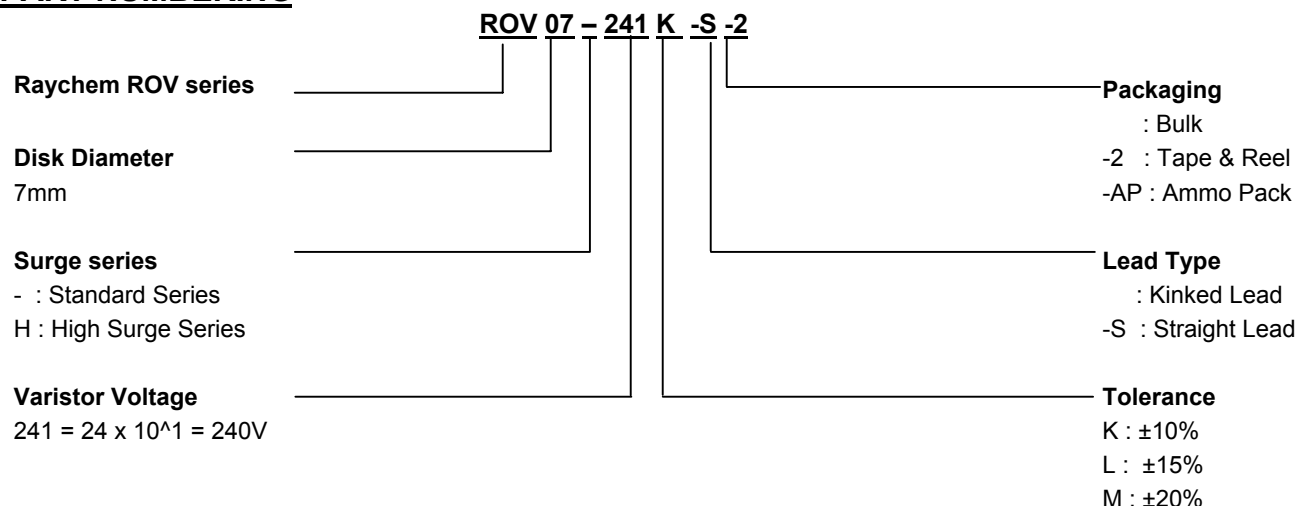

### DEVICE MARKING

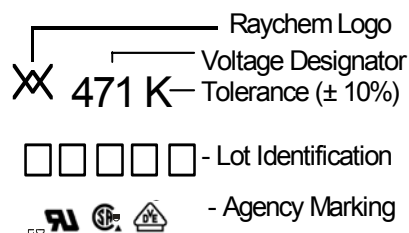

### GENERAL CHARACTERISTICS

|                                               |                            |
|-----------------------------------------------|----------------------------|
| Storage temperature:                          | -40°C ... +125°C           |
| Maximum operating temperature:                | -40°C ... +125°C           |
| Maximum working surface temperature:          | +115°C                     |
| Temperature coefficient of voltage:           | 0 ... +0.05% / °C max.     |
| Insulation resistance of coating (@ 500 VDC): | Over 1000MΩ                |
| Maximum response time:                        | 25ns                       |
| Lead Material:                                | 22 AWG Sn/Pb Plated Copper |

### AGENCY RECOGNITION

Device Ratings and Characteristics Tables contain specific recognition information for each individual part. The table below details marking symbols for each agency recognition type.

| UL1414 | UL1449<br>(2nd Edition) | CSA | VDE |
|--------|-------------------------|-----|-----|
| ◆      | ●                       | ▲   | ■   |

# ROV07, ROV07H

## 7mm Series Metal Oxide Varistors

www.tycopowercomponents.com

Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

### DEVICE RATINGS AND CHARACTERISTICS

#### STANDARD SERIES

| Part Number | Varistor Voltage<br>V@1.0mA |           | Maximum Allowable Voltage              |                    | Maximum Clamping Voltage<br>V@10A | Maximum Surge Current<br>(8x20us) |                | Rated Wattage | Energy<br>(10x1000us) | Capacitance<br>(Typical) | Certifications                                                                      |
|-------------|-----------------------------|-----------|----------------------------------------|--------------------|-----------------------------------|-----------------------------------|----------------|---------------|-----------------------|--------------------------|-------------------------------------------------------------------------------------|
|             | (V <sub>DC</sub> )          | Tolerance | V <sub>rms</sub><br>(V <sub>AC</sub> ) | (V <sub>DC</sub> ) | (V <sub>DC</sub> )                | 1 Time<br>(A)                     | 2 Times<br>(A) | (W)           | (J)                   | @1kHz<br>(pF)            |  |
| ROV07-180M  | 18                          | ± 20%     | 11                                     | 14                 | 36 <sup>1)</sup>                  | 250                               | 125            | 0.02          | 1.2                   | 2918                     | ●                                                                                   |
| ROV07-220L  | 22                          | ± 15%     | 14                                     | 18                 | 43 <sup>1)</sup>                  |                                   |                |               | 1.4                   | 2933                     | ●                                                                                   |
| ROV07-270K  | 27                          | ± 10%     | 17                                     | 22                 | 53 <sup>1)</sup>                  |                                   |                |               | 1.7                   | 2344                     | ●                                                                                   |
| ROV07-330K  | 33                          |           | 20                                     | 26                 | 65 <sup>1)</sup>                  |                                   |                |               | 2.2                   | 1840                     | ●                                                                                   |
| ROV07-390K  | 39                          |           | 25                                     | 31                 | 77 <sup>1)</sup>                  |                                   |                |               | 2.4                   | 1817                     | ●                                                                                   |
| ROV07-470K  | 47                          |           | 30                                     | 38                 | 93 <sup>1)</sup>                  |                                   |                |               | 3.0                   | 1595                     | ●                                                                                   |
| ROV07-560K  | 56                          |           | 35                                     | 45                 | 110 <sup>1)</sup>                 |                                   |                |               | 3.5                   | 1333                     | ●                                                                                   |
| ROV07-680K  | 68                          |           | 40                                     | 56                 | 135 <sup>1)</sup>                 |                                   |                |               | 4.3                   | 1119                     | ●                                                                                   |
| ROV07-820K  | 82                          |           | 50                                     | 65                 | 135                               | 1200                              | 600            | 0.25          | 5.5                   | 643                      | ● ■                                                                                 |
| ROV07-101K  | 100                         |           | 60                                     | 85                 | 165                               |                                   |                |               | 7.0                   | 535                      | ● ■                                                                                 |
| ROV07-121K  | 120                         |           | 75                                     | 100                | 200                               |                                   |                |               | 8.0                   | 457                      | ● ■                                                                                 |
| ROV07-151K  | 150                         |           | 95                                     | 125                | 250                               |                                   |                |               | 11.0                  | 371                      | ● ■                                                                                 |
| ROV07-181K  | 180                         |           | 115                                    | 150                | 300                               |                                   |                |               | 13.0                  | 215                      | ● ■                                                                                 |
| ROV07-201K  | 200                         |           | 130                                    | 170                | 340                               |                                   |                |               | 14.3                  | 224                      | ◆ ● ▲ ■                                                                             |
| ROV07-221K  | 220                         |           | 140                                    | 180                | 360                               |                                   |                |               | 15.5                  | 190                      | ◆ ● ▲ ■                                                                             |
| ROV07-241K  | 240                         |           | 150                                    | 200                | 395                               |                                   |                |               | 16.8                  | 185                      | ◆ ● ▲ ■                                                                             |
| ROV07-271K  | 270                         |           | 175                                    | 225                | 455                               |                                   |                |               | 19.8                  | 161                      | ◆ ● ▲ ■                                                                             |
| ROV07-301K  | 300                         |           | 195                                    | 250                | 505                               |                                   |                |               | 21.0                  | 135                      | ◆ ● ▲ ■                                                                             |
| ROV07-331K  | 330                         |           | 210                                    | 275                | 550                               |                                   |                |               | 23.0                  | 141                      | ◆ ● ▲ ■                                                                             |
| ROV07-361K  | 360                         |           | 230                                    | 300                | 595                               |                                   |                |               | 26.0                  | 117                      | ◆ ● ▲ ■                                                                             |
| ROV07-391K  | 390                         |           | 250                                    | 320                | 650                               |                                   |                |               | 30.0                  | 110                      | ◆ ● ▲ ■                                                                             |
| ROV07-431K  | 430                         |           | 275                                    | 350                | 710                               |                                   |                |               | 33.0                  | 111                      | ◆ ● ▲ ■                                                                             |
| ROV07-471K  | 470                         |           | 300                                    | 385                | 775                               |                                   |                |               | 35.0                  | 102                      | ◆ ● ▲ ■                                                                             |
| ROV07-511K  | 510                         |           | 320                                    | 418                | 842                               |                                   |                |               | 37.0                  | 100                      | ◆ ● ▲                                                                               |
| ROV07-561K  | 560                         |           | 350                                    | 460                | 920                               |                                   |                |               | 39.0                  | 87                       | ◆ ● ▲                                                                               |
| ROV07-621K  | 620                         |           | 385                                    | 505                | 1025                              |                                   |                |               | 41.0                  | 80                       | ◆ ● ▲                                                                               |
| ROV07-681K  | 680                         |           | 420                                    | 560                | 1120                              |                                   |                |               | 43.0                  | 82                       | ◆ ● ▲                                                                               |
| ROV07-751K  | 750                         |           | 460                                    | 615                | 1240                              |                                   |                |               | 45.0                  | 74                       | ◆ ● ▲                                                                               |
| ROV07-781K  | 780                         |           | 485                                    | 640                | 1290                              |                                   |                |               | 46.0                  | 70                       | ◆ ● ▲                                                                               |
| ROV07-821K  | 820                         |           | 510                                    | 670                | 1355                              |                                   |                |               | 47.0                  | 70                       | ◆ ● ▲                                                                               |

1). The clamping voltage for devices ROV07-180M to ROV07-680K is tested with 2.5A current.

# ROV07, ROV07H

## 7mm Series Metal Oxide Varistors


www.tycopowercomponents.com

Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

### PULSE LIFETIME RATING CURVES

#### STANDARD SERIES

ROV07-180M – ROV07-680K

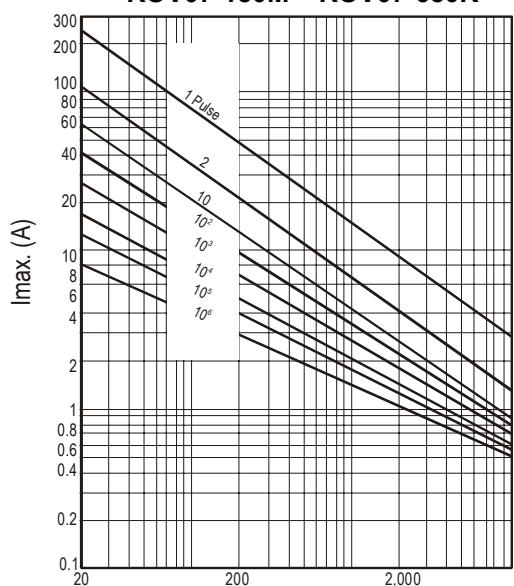


Rectangular Wave (μs)

### V-I CHARACTERISTIC CURVES


#### STANDARD SERIES

ROV07-180M – ROV07-680K

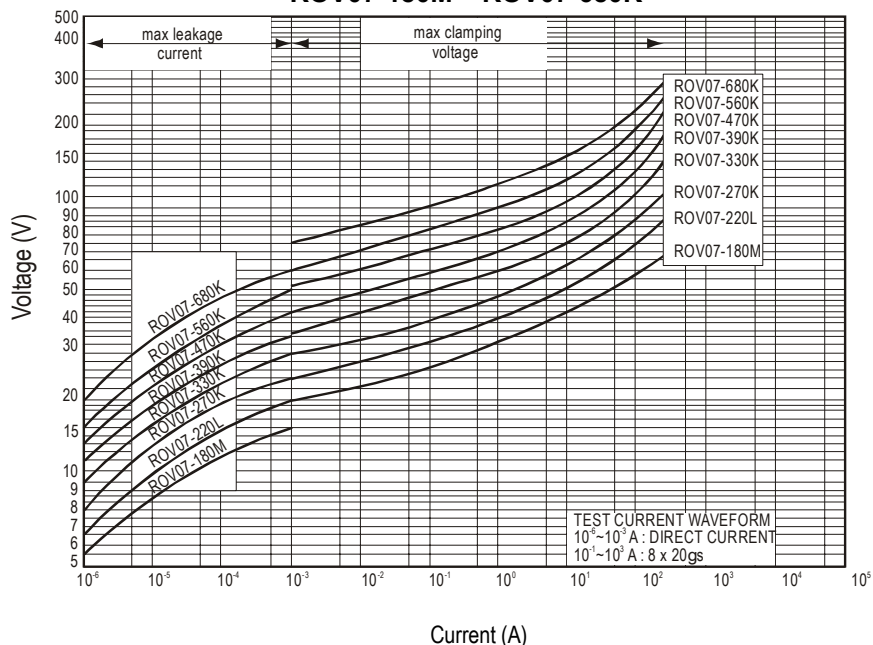


Current (A)

ROV07-820K – ROV07-821K

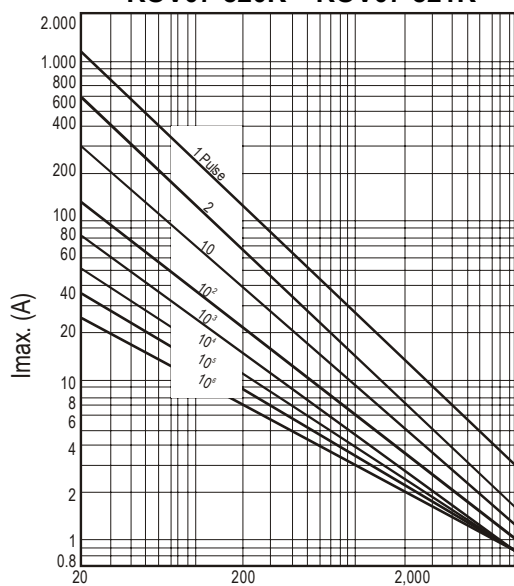

Rectangular Wave (μs)

ROV07-820K – ROV07-821K

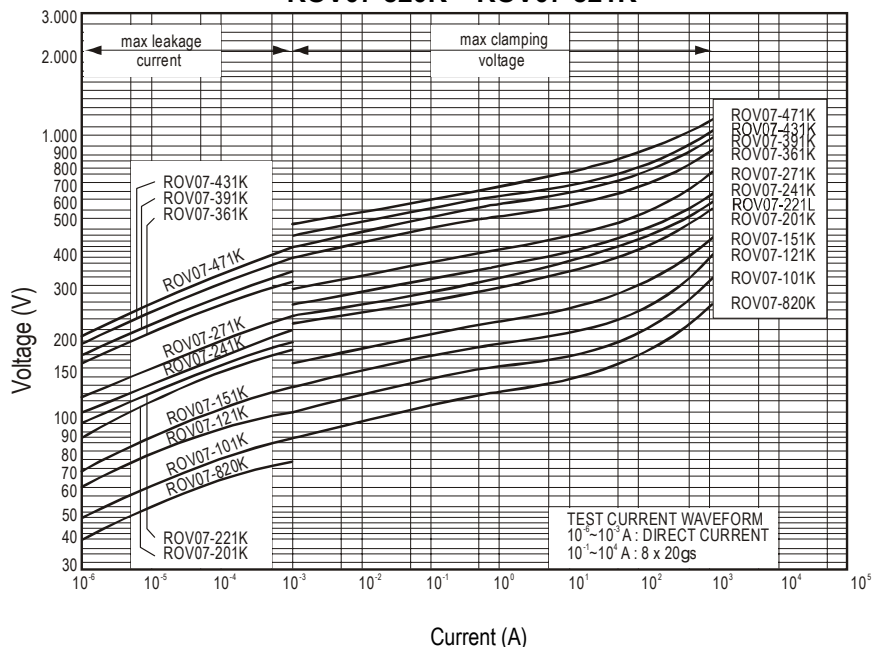

Current (A)

# ROV07, ROV07H

## 7mm Series Metal Oxide Varistors

www.tycopowercomponents.com

Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

### DEVICE RATINGS AND CHARACTERISTICS

#### HIGH SURGE SERIES

| Part Number | Varistor Voltage<br>V@1.0mA |           | Maximum Allowable Voltage              |                    | Maximum Clamping Voltage<br>V@10A | Maximum Surge Current<br>(8x20us) |                   | Rated Wattage | Energy<br>(10x1000us) | Capacitance<br>(Typical) | Certifications                                                                      |
|-------------|-----------------------------|-----------|----------------------------------------|--------------------|-----------------------------------|-----------------------------------|-------------------|---------------|-----------------------|--------------------------|-------------------------------------------------------------------------------------|
|             | (V <sub>DC</sub> )          | Tolerance | V <sub>rms</sub><br>(V <sub>AC</sub> ) | (V <sub>DC</sub> ) | (V <sub>DC</sub> )                | 1<br>Time<br>(A)                  | 2<br>Times<br>(A) | (W)           | (J)                   | @1kHz<br>(pF)            |  |
| ROV07H180M  | 18                          | ± 20%     | 11                                     | 14                 | 36 <sup>1)</sup>                  | 500                               | 250               | 0.02          | 1.5                   | 2920                     | ●                                                                                   |
| ROV07H220L  | 22                          | ± 15%     | 14                                     | 18                 | 43 <sup>1)</sup>                  |                                   |                   |               | 1.7                   | 2930                     | ●                                                                                   |
| ROV07H270K  | 27                          | ± 10%     | 17                                     | 22                 | 53 <sup>1)</sup>                  |                                   |                   |               | 2.1                   | 2340                     | ●                                                                                   |
| ROV07H330K  | 33                          |           | 20                                     | 26                 | 65 <sup>1)</sup>                  |                                   |                   |               | 2.8                   | 1840                     | ●                                                                                   |
| ROV07H390K  | 39                          |           | 25                                     | 31                 | 77 <sup>1)</sup>                  |                                   |                   |               | 3.0                   | 1820                     | ●                                                                                   |
| ROV07H470K  | 47                          |           | 30                                     | 38                 | 93 <sup>1)</sup>                  |                                   |                   |               | 3.8                   | 1600                     | ●                                                                                   |
| ROV07H560K  | 56                          |           | 35                                     | 45                 | 110 <sup>1)</sup>                 |                                   |                   |               | 4.4                   | 1330                     | ●                                                                                   |
| ROV07H680K  | 68                          |           | 40                                     | 56                 | 135 <sup>1)</sup>                 |                                   |                   |               | 5.4                   | 1120                     | ●                                                                                   |
| ROV07H820K  | 82                          |           | 50                                     | 65                 | 135                               | 1750                              | 1250              | 0.25          | 7.0                   | 640                      | ●                                                                                   |
| ROV07H101K  | 100                         |           | 60                                     | 85                 | 165                               |                                   |                   |               | 9.0                   | 540                      | ●                                                                                   |
| ROV07H121K  | 120                         |           | 75                                     | 100                | 200                               |                                   |                   |               | 11.0                  | 460                      | ●                                                                                   |
| ROV07H151K  | 150                         |           | 95                                     | 125                | 250                               |                                   |                   |               | 13.0                  | 370                      | ●                                                                                   |
| ROV07H181K  | 180                         |           | 115                                    | 150                | 300                               |                                   |                   |               | 16.0                  | 220                      | ●                                                                                   |
| ROV07H201K  | 200                         |           | 130                                    | 170                | 340                               |                                   |                   |               | 17.5                  | 220                      | ◆ ● ▲                                                                               |
| ROV07H221K  | 220                         |           | 140                                    | 180                | 360                               |                                   |                   |               | 19.0                  | 190                      | ◆ ● ▲                                                                               |
| ROV07H241K  | 240                         |           | 150                                    | 200                | 395                               |                                   |                   |               | 21.0                  | 190                      | ◆ ● ▲                                                                               |
| ROV07H271K  | 270                         |           | 175                                    | 225                | 455                               |                                   |                   |               | 24.0                  | 160                      | ◆ ● ▲                                                                               |
| ROV07H301K  | 300                         |           | 195                                    | 250                | 505                               |                                   |                   |               | 26.0                  | 140                      | ◆ ● ▲                                                                               |
| ROV07H331K  | 330                         |           | 210                                    | 275                | 550                               |                                   |                   |               | 28.0                  | 140                      | ◆ ● ▲                                                                               |
| ROV07H361K  | 360                         |           | 230                                    | 300                | 595                               |                                   |                   |               | 32.0                  | 120                      | ◆ ● ▲                                                                               |
| ROV07H391K  | 390                         |           | 250                                    | 320                | 650                               |                                   |                   |               | 35.0                  | 110                      | ◆ ● ▲                                                                               |
| ROV07H431K  | 430                         |           | 275                                    | 350                | 710                               |                                   |                   |               | 40.0                  | 110                      | ◆ ● ▲                                                                               |
| ROV07H471K  | 470                         |           | 300                                    | 385                | 775                               |                                   |                   |               | 42.0                  | 100                      | ◆ ● ▲                                                                               |
| ROV07H511K  | 510                         |           | 320                                    | 418                | 842                               |                                   |                   |               | 45.0                  | 100                      | ◆ ● ▲                                                                               |
| ROV07H561K  | 560                         |           | 350                                    | 460                | 920                               |                                   |                   |               | 51.0                  | 85                       | ◆ ● ▲                                                                               |
| ROV07H621K  | 620                         |           | 385                                    | 505                | 1025                              |                                   |                   |               | 54.0                  | 80                       | ◆ ● ▲                                                                               |
| ROV07H681K  | 680                         |           | 420                                    | 560                | 1120                              |                                   |                   |               | 56.0                  | 80                       | ◆ ● ▲                                                                               |
| ROV07H751K  | 750                         |           | 460                                    | 615                | 1240                              |                                   |                   |               | 58.0                  | 75                       | ◆ ● ▲                                                                               |
| ROV07H781K  | 780                         |           | 485                                    | 640                | 1290                              |                                   |                   |               | 59.0                  | 70                       | ◆ ● ▲                                                                               |
| ROV07H821K  | 820                         |           | 510                                    | 670                | 1355                              |                                   |                   |               | 60.0                  | 70                       | ◆ ● ▲                                                                               |

1). The clamping voltage for devices ROV07H180M to ROV07H680K is tested with 2.5A current.



# ROV07, ROV07H 7mm Series Metal Oxide Varistors

www.tycopowercomponents.com

Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003



## PULSE LIFETIME RATING CURVES

### HIGH SURGE SERIES

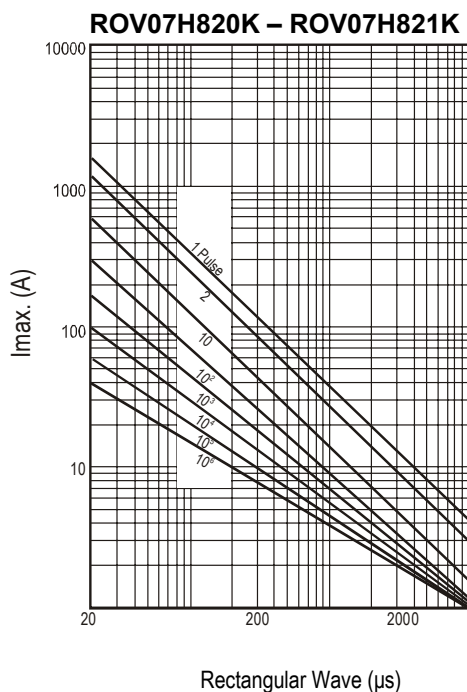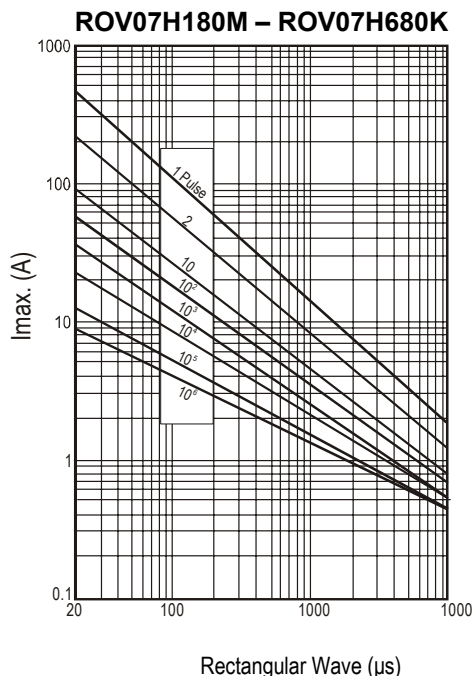

## V-I CHARACTERISTIC CURVES

### HIGH SURGE SERIES

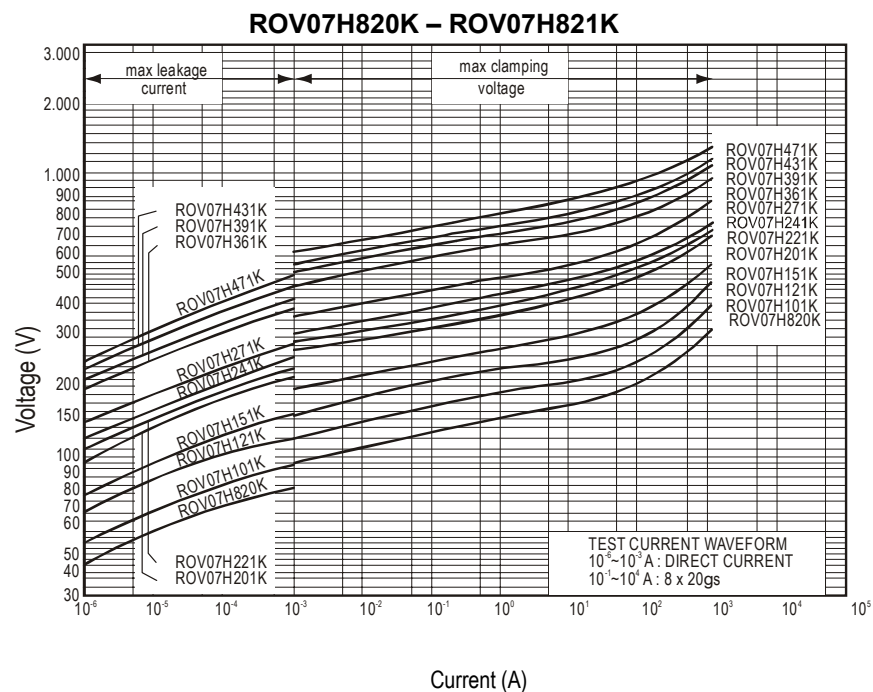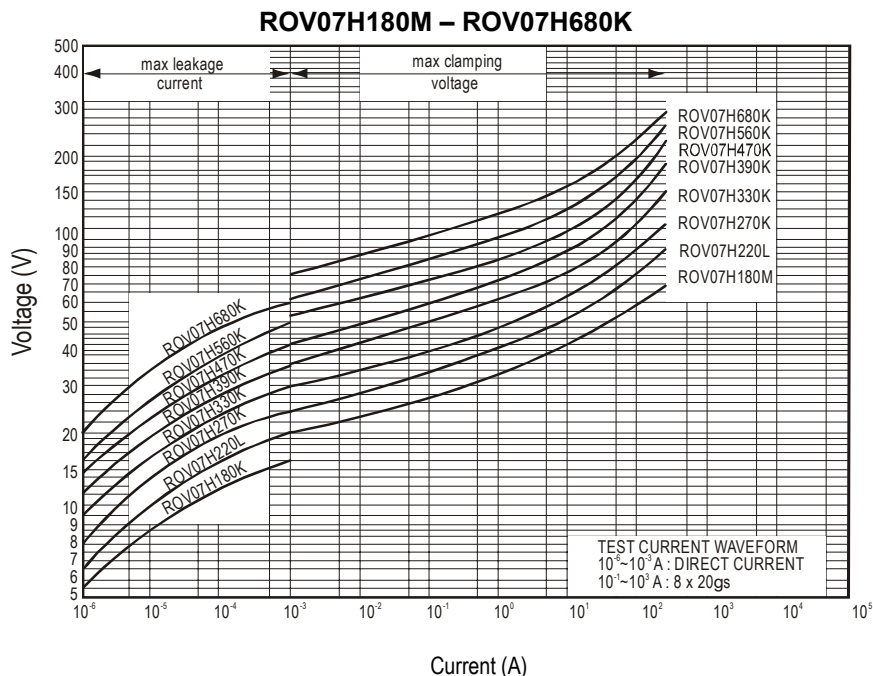


# ROV07, ROV07H

## 7mm Series Metal Oxide Varistors

www.tycopowercomponents.com


Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

### DIMENSIONS

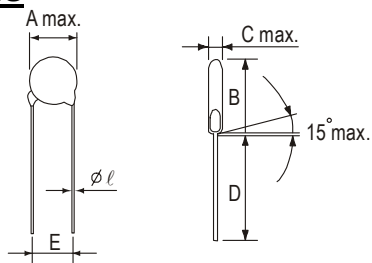

**KINKED LEAD TYPE**  
Dimension Table

|              |      |
|--------------|------|
| A max.       | 9.0  |
| $l \pm 0.05$ | 0.6  |
| $E \pm 1.0$  | 5.0  |
| B max.       | 13.0 |
| $D_1$ min.   | 25.0 |
| D min.       | 24.0 |



**STRAIGHT LEAD TYPE (-S)**  
Table of C max., F, and B<sub>1</sub> max.

| Type No. | C max. | F±0.8 | B <sub>1</sub> max. |
|----------|--------|-------|---------------------|
| 180M     | 4.5    | 0.8   | 12.0                |
| 220L     | 4.5    | 0.9   | 12.0                |
| 270K     | 4.7    | 0.9   | 12.0                |
| 330K     | 4.7    | 1.0   | 12.0                |
| 390K     | 4.7    | 1.2   | 12.0                |
| 470K     | 5.0    | 1.2   | 12.0                |
| 560K     | 5.0    | 1.4   | 12.0                |
| 680K     | 5.5    | 1.7   | 12.0                |
| 820K     | 3.8    | 0.8   | 12.0                |
| 101K     | 3.9    | 0.8   | 12.0                |
| 121K     | 4.1    | 0.9   | 12.0                |
| 151K     | 4.5    | 1.2   | 12.0                |
| 181K     | 4.1    | 1.0   | 12.0                |
| 201K     | 4.2    | 1.0   | 12.0                |
| 221K     | 4.3    | 1.1   | 12.0                |
| 241K     | 4.4    | 1.3   | 12.0                |
| 271K     | 4.6    | 1.4   | 12.0                |
| 301K     | 4.8    | 1.5   | 12.0                |
| 331K     | 4.9    | 1.5   | 12.0                |
| 361K     | 5.1    | 1.9   | 12.0                |
| 391K     | 5.3    | 2.0   | 12.5                |
| 431K     | 6.1    | 2.3   | 12.5                |
| 471K     | 6.4    | 2.3   | 12.5                |
| 511K     | 6.6    | 2.5   | 13.0                |
| 561K     | 6.9    | 2.8   | 13.0                |
| 621K     | 7.2    | 3.1   | 13.0                |
| 681K     | 7.5    | 3.4   | 13.0                |
| 751K     | 7.9    | 3.7   | 13.0                |
| 781K     | 8.1    | 3.9   | 13.0                |
| 821K     | 8.3    | 4.1   | 13.0                |



# ROV07, ROV07H


## 7mm Series Metal Oxide Varistors

[www.tycopowercomponents.com](http://www.tycopowercomponents.com)

 Document: SCD 25481  
 Status: Released  
 Rev. A June 30, 2003

### PACKAGING

in mm

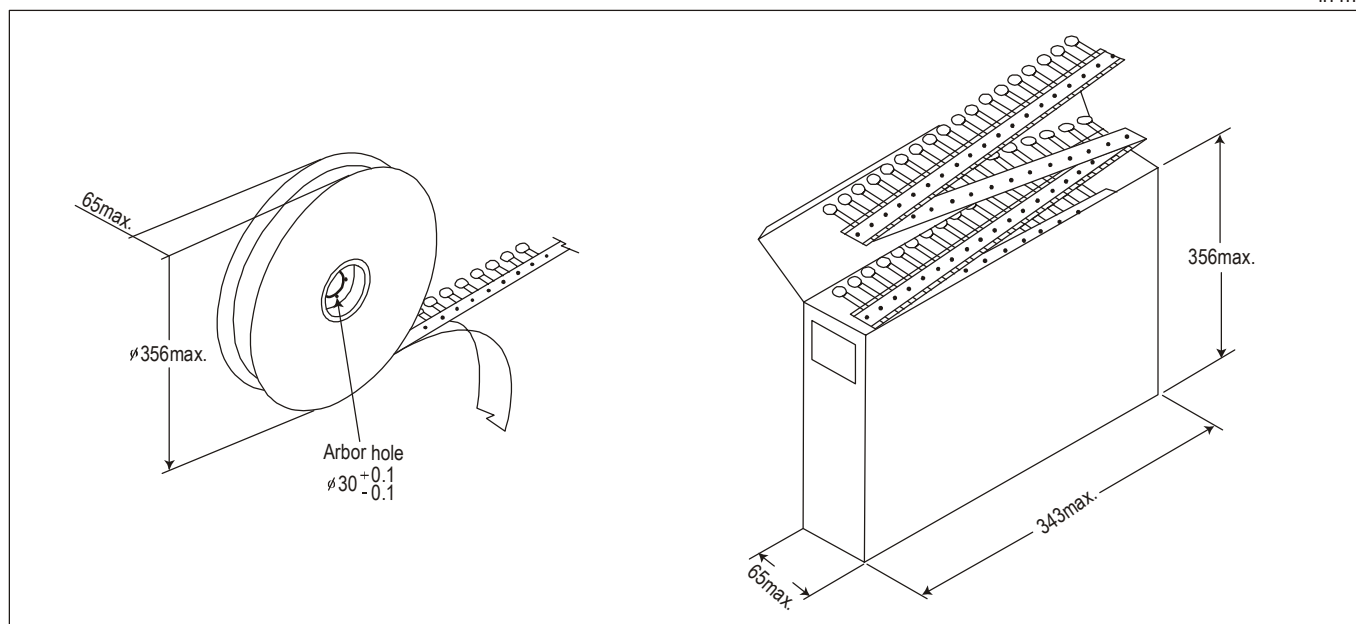

| Packaging        | Bulk (box)      | Reel               | Ammo            |
|------------------|-----------------|--------------------|-----------------|
| Box size (mm)    | 290 x 155 x 110 | 350 x 350 x 108    | 330 x 240 x 45  |
| Carton size (mm) | 310 x 328 x 250 | 371 x 371 x 590    | 354 x 515 x 258 |
| One carton with  | 4 Boxes         | 5 Boxes (10 reels) | 10 Boxes        |

| Part Number                                          | Bulk (box) | Reel | Ammo |
|------------------------------------------------------|------------|------|------|
| ROV07-180M to ROV07-470K<br>ROV07H180M to ROV07H470K | 5000       | 1500 | 1500 |
| ROV07-560K to ROV07-680K<br>ROV07H560K to ROV07H680K | 5000       | 1500 | 1000 |
| ROV07-820K to ROV07-331K<br>ROV07H820K to ROV07H331K | 5000       | 1500 | 1500 |
| ROV07-361K to ROV07-391K<br>ROV07H361K to ROV07H391K | 5000       | 1500 | 1000 |
| ROV07-431K to ROV07-471K<br>ROV07H431K to ROV07H471K | 5000       | 1000 | 1000 |
| ROV07-511K to ROV07-751K<br>ROV07H511K to ROV07H751K | 4000       | 1000 | 1000 |
| ROV07-781K to ROV07-821K<br>ROV07H781K to ROV07H821K | 4000       | 1000 | 1000 |



# ROV07, ROV07H


## 7mm Series Metal Oxide Varistors

www.tycopowercomponents.com


Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

### TAPE AND REEL DIMENSIONS

1/2" Pitch

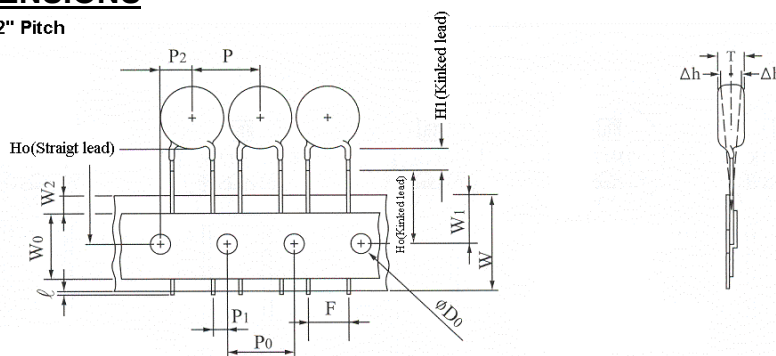

1.0" Pitch

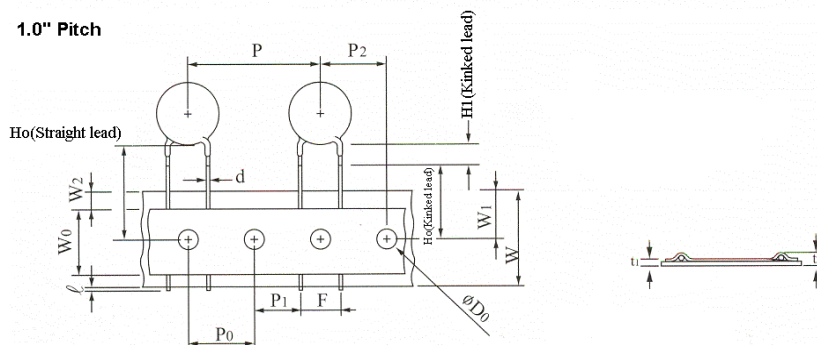

| Symbols               | Item                                   | Value                   |
|-----------------------|----------------------------------------|-------------------------|
| $\ell$                | Cut out length                         | 1.1mm max.              |
| $H_1$ (Kinked lead)   | Height of kink                         | 3.5mm max.              |
| $H_0$ (Kinked lead)   | Height to seating plane                | $16.0 \pm 0.5$ mm       |
| $H_o$ (Straight lead) | Height of component from hole center   | 16.0-21.0mm             |
| $\Delta h$            | Front to back deviation                | $0.0 \pm 2.0$ mm        |
| $W$                   | Carrier tape width                     | $18.0^{+1.0}_{-0.5}$ mm |
| $W_0$                 | Hold down tape width                   | 10.0mm                  |
| $W_1$                 | Sprocket hole position                 | $9.0^{+0.75}_{-0.5}$ mm |
| $W_2$                 | Adhesive tape position                 | 3.0mm max.              |
| $F$                   | Component lead spacing                 | $5.0^{+0.8}_{-0.2}$ mm  |
| $P$                   | Pitch of component                     | $12.7 \pm 1.0$ mm       |
| $P_0$                 | Sprocket hole pitch                    | $12.7 \pm 0.3$ mm       |
| $P_1$                 | Lead length from hole center to lead   | $3.85 \pm 0.7$ mm       |
| $P_2$                 | Length from hole center to disk center | $6.35 \pm 1.3$ mm       |
| $D_0$                 | Sprocket hole diameter                 | $4.0 \pm 0.2$ mm        |
| $d$                   | Lead wire diameter                     | $0.6 \pm 0.05$ mm       |
| $T$                   | Disk thickness                         | See C. max table        |
| $t_1$                 | Total thickness tape                   | $0.7 \pm 0.05$ mm       |
| $t_2$                 | Total thickness                        | 1.6mm max.              |

## ROV07, ROV07H

### 7mm Series Metal Oxide Varistors

[www.tycopowercomponents.com](http://www.tycopowercomponents.com)

Document: SCD 25481  
Status: Released  
Rev. A June 30, 2003

---

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of each product for their applications. Tyco Electronics Corporation assumes no responsibility for the use of its product or for any infringement of patents or other rights of third parties resulting from the use of its product. No license is granted by implication or otherwise under any patent or proprietary right of Tyco Electronics except the right to use such product for the purpose for which it is sold. Tyco Electronics reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product. This publication supersedes and replaces all information previously supplied. Without express written consent by an officer of Tyco Electronics, Tyco Electronics does not authorize the use of any its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems. Tyco Electronics' only obligations are those in the Tyco Electronics Standard Terms and Conditions of Sale and in no case will Tyco Electronics be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

**Raychem** is a trademark of Tyco Electronics Corporation

© 2003 Tyco Electronics Corporation