


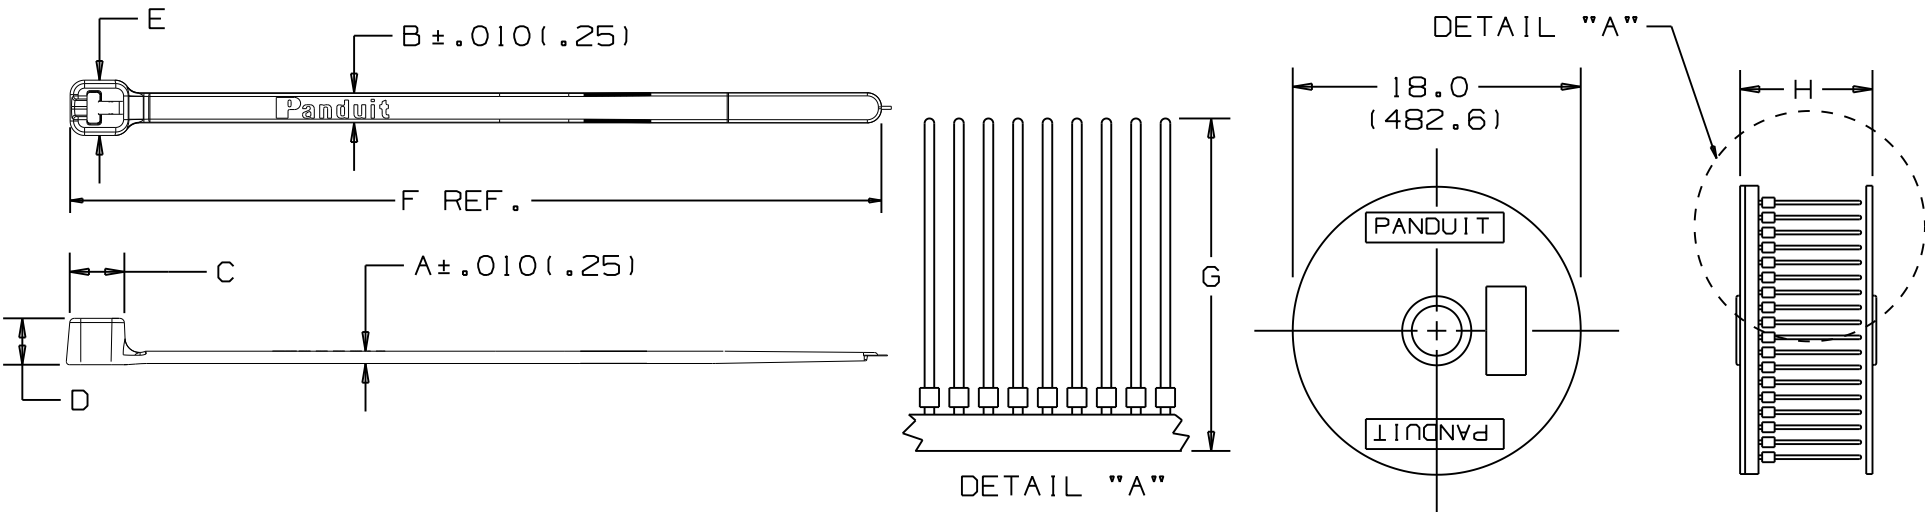

PANDUIT * PART NO.	BUNDLE DIA.		A IN. (mm)	B IN. (mm)	C IN. (mm)	D IN. (mm)	E IN. (mm)	F IN. (mm)	G IN. (mm)	H IN. (mm)	MINIMUM LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT (W/O RIBBON) lbs (g)/100 pcs
	IN. MIN (mm)	IN. MAX (mm)											
BT1M-XMR	0	.82 (20.8)	.036 (.9)	.100 (2.5)	.175 (4.4)	.154 (3.9)	.185 (4.7)	4.0 (102)	4.5 (114)	5.3 (135)	30 (133)	MINIATURE	.06 (29)
BT1.5M-XMR	0	1.31 (33.3)	.036 (.9)	.100 (2.5)	.175 (4.4)	.154 (3.9)	.185 (4.7)	5.6 (142)	6.0 (152)	6.8 (173)	30 (133)	MINIATURE	.08 (38)

NOTES:

- *1) SEE www.panduit.com FOR PART MATERIAL & COLOR SUFFIX DESIGNATIONS.
- 2) STANDARD PACKAGING: 5000 STRAPS PER REEL, 2 REELS PER CARTON.
- 3) PACKAGED FOR USE WITH FULLY AUTOMATIC CABLE TIE INSTALLATION SYSTEMS.
- 4) RECOGNIZED UNDER THE COMPONENTS PROGRAM OF UNDERWRITERS LABORATORIES INC.

W10001DA/01 BT-0289

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

XMR Barb Ty CABLE TIES
PACKAGED FOR AUTOMATIC TOOLS

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .10 (2.5) (XXX) ± .020 (51)
(.XX) ± .02 (5) ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
JABO

MAT'L:

SCALE
NONE

DATE
3/8/05

NYLON 6.6

DRAWING NO.
BT-0289

DWG
A
SIZE

1	12/10/08	ERW		CHANGED BT1M-XMR DIMENSION 'H' TO ONE DECIMAL PLACE	BT-0289	1			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	