

Features:

- WWS offers miniature size at higher power rating
- High performance for low cost
- High power to size ratio
- MWW – completely molded construction with welded terminations
- Complete welded terminations
- Tinned copper leads
- Available in non-inductive styles
- High temperature silicone coating
- RoHS compliant
- Higher operating temperatures available
- Bulk packaging available - contact Stackpole for package quantities





Electrical Specifications							
Type / Code	MIL-R-26 Ref.	Dielectric Strength (V) (1)	Power Rating (Watts) @ 125°C	Power Rating (Watts) @ 70°C	TCR (ppm/°C)	Ohmic Range(Ω) and Tolerance 0.1%, 0.5%, 1% & 5%	
						Standard	Non-Inductive
WW12 / NWW12	-	500V	0.4W	0.5 W	< 1Ω = ±90ppm/°C	0.1 - 2K	0.1 - 1K
WW1 / NWW1	-	500V	1W	1.1 W		0.1 - 3K	0.1 - 1.5K
WW1A / NWW1A	RW-70	500V	1W	1.3 W		0.1 - 7K	0.1 - 3.5K
WW2 / NWW2	RW-69	1,000V	1.5W	2.1 W		0.1 - 10K	0.1 - 5K
WWS2 / NWS2	-	500V	2.5W	2.6 W		0.1 - 3K	0.1 - 1.5K
WW2A / NWW2A	-	1,000V	2.5W	2.6 W		0.1 - 15K	0.1 - 7.5K
WW3 / NWW3	RW-79	1,000V	3W	3.2 W	1Ω to 10Ω = ±50ppm/°C	0.1 - 22K	0.1 - 11K
WWS3 / NWS3	-	1,000V	3W	3.2 W		0.1 - 10K	0.1 - 5K
WW3A / NWW3A	-	1,000V	3W	3.4 W		0.1 - 30K	0.1 - 15K
WW4 / NWW4	-	1,000V	4W	4.3 W		0.1 - 40K	0.1 - 20K
WWS4 / NWS4	RW-79	1,000V	4W	4.3 W		0.1 - 22K	0.1 - 11K
WW5 / NWW5	RW-67, RW-74	1,000V	5W	5.1 W		0.1 - 50K	0.1 - 25K
WWS5 / NWS5	-	1,000V	5W	5.1 W		0.1 - 40K	0.1 - 20K
WW7 / NWW7	-	1,000V	6.5W	7.2 W		0.1 - 70K	0.1 - 35K
WWS7 / NWS7	RW-67, RW-74	1,000V	6.5W	7.2 W		0.1 - 50K	0.1 - 25K
WW7B / NWW7B	-	1,000V	7W	7.7 W		0.1 - 100K	0.1 - 50K
WW10 / NWW10	RW-78	1,000V	10W	11.0 W	>10Ω = ±20ppm/°C	0.1 - 150K	0.1 - 75K
WWS10 / NWS10	-	1,000V	10W	11.0 W		0.1 - 100K	0.1 - 50K
MWW1 / NMWW1	RW-70	1,000V	1W	1.3 W		0.1 - 2K	-
MWW3 / NMWW3	RW-79	1,000V	3W	3.2 W		0.1 - 20K	-
MWW5 / NMWW5	RW-67, RW-74	1,000V	5W	5.5 W		0.1 - 40K	-
MWW10 / NMWW10	RW-68, RW-74	1,000V	10W	11.0 W		0.1 - 150K	-

(1) Lesser of √PR or maximum working voltage

Performance Characteristics		
Test	Test Condition	Result
Moisture Resistance	1000 hours, 95% R.H., 40°C	1% max
Load Life	1000 hours, cycled power 1.5 hours ON, 0.5 hours OFF, 25°C	1%
Temperature Cycling	5 cycles, -55°C to 200°C	0.5%
Short Time Overload	5 times rated power for 5 seconds	1%

Operating Temperature Range: -55°C to +350°C

Power Derating Curve:

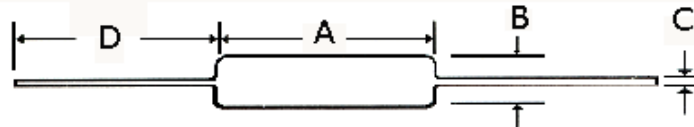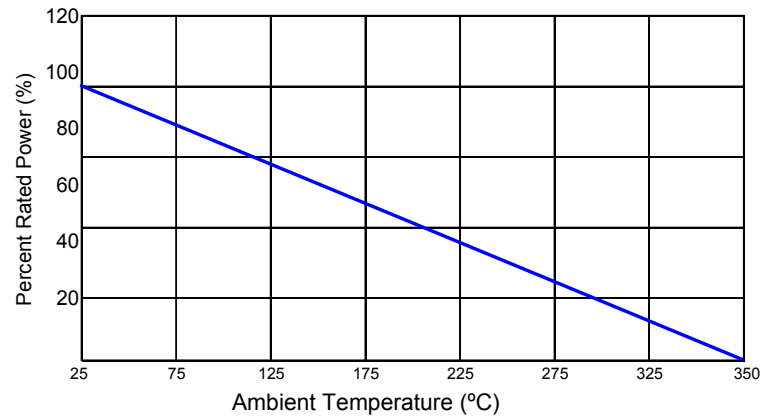

Mechanical Specifications					
Type / Code	A	B	C	D (Bulk) (1)	Unit
WW12 / NWW12	0.312 ± 0.062 7.92 ± 1.57	0.110 ± 0.031 2.79 ± 0.79	0.025 ± 0.002 0.64 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW1, WWS2 / NWW1, NWWS2	0.375 ± 0.062 9.53 ± 1.57	0.110 ± 0.031 2.79 ± 0.79	0.025 ± 0.002 0.64 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW1A / NWW1A	0.420 ± 0.062 10.67 ± 1.57	0.110 ± 0.031 2.79 ± 0.79	0.025 ± 0.002 0.64 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW2, WWS3 / NWW2, NWWS3	0.370 ± 0.062 9.40 ± 1.57	0.156 ± 0.031 3.96 ± 0.79	0.032 ± 0.002 0.81 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW2A / NWW2A	0.550 ± 0.062 13.97 ± 1.57	0.156 ± 0.031 3.96 ± 0.79	0.032 ± 0.002 0.81 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW3, WWS4 / NWW3, NWWS4	0.560 ± 0.062 14.22 ± 1.57	0.187 ± 0.031 4.75 ± 0.79	0.032 ± 0.002 0.81 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW3A / NWW3A	0.500 ± 0.062 12.70 ± 1.57	0.218 ± 0.031 5.54 ± 0.79	0.032 ± 0.002 0.81 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW4, WWS5 / NWW4, NWWS5	0.700 ± 0.062 17.78 ± 1.57	0.270 ± 0.031 6.86 ± 0.79	0.036 ± 0.002 0.91 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW5, WWS7 / NWW5, NWWS7	0.875 ± 0.062 22.23 ± 1.57	0.312 ± 0.031 7.92 ± 0.79	0.036 ± 0.002 0.91 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW7 / NWW7	1.000 ± 0.062 25.40 ± 1.57	0.312 ± 0.031 7.92 ± 0.79	0.036 ± 0.002 0.91 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW7B, WWS10 / NWW7B, NWWS10	1.200 ± 0.062 30.48 ± 1.57	0.312 ± 0.031 7.92 ± 0.79	0.036 ± 0.002 0.91 ± 0.05	1.500 typ. 38.10 typ.	inches mm
WW10 / NWW10	1.780 ± 0.062 45.21 ± 1.57	0.375 ± 0.031 9.53 ± 0.79	0.040 ± 0.002 (2) 1.02 ± 0.05 (2)	1.500 typ. 38.10 typ.	inches mm
MWW1 / NMWW1	0.385 ± 0.062 9.78 ± 1.57	0.135 ± 0.031 3.43 ± 0.79	0.032 ± 0.002 0.81 ± 0.05	1.500 typ. 38.10 typ.	inches mm
MWW3 / NMWW3	0.560 ± 0.062 14.22 ± 1.57	0.205 ± 0.031 5.21 ± 0.79	0.032 ± 0.002 0.81 ± 0.05	1.500 typ. 38.10 typ.	inches mm
MWW5 / NMWW5	0.925 ± 0.062 23.50 ± 1.57	0.330 ± 0.031 8.38 ± 0.79	0.036 ± 0.002 0.91 ± 0.05	1.500 typ. 38.10 typ.	inches mm
MWW10 / NMWW10	1.965 ± 0.062 49.91 ± 1.57	0.480 ± 0.031 12.19 ± 0.79	0.040 ± 0.002 1.02 ± 0.05	1.500 typ. 38.10 typ.	inches mm

(1) See "Resistor Packaging Specification Document" for lead length dimension for tape and reel packaged product

(2) Available in 0.036" / 0.91mm

How to Order

1	2	3	4	5	6	7	8	9
W	W	1	F	T	1	K	0	0

Product Series	Type/Code	Power Rating		Tolerance		Packaging			Resistance Value
		@ 125°C	@ 70°C	Code	Tol	Code	Description	Quantity	
WW	Standard			B	0.1%				Four characters with the multiplier used as the decimal holder. 0.1 ohm = R100 2 Kohm = 2K00
WWS	Mini			D	0.5%				
MWW	Molded			F	1%				
NWW	Non-Inductive			J	5%				
NWWS	Mini Non-Inductive								
	WW12 / NWW12	0.4W	0.5 W						
	WW1 / NWW1	1W	1.1 W						
	WW1A / NWW1A	1W	1.3 W						
	WW2 / NWW2	1.5W	2.1 W						
	WWS2 / NWWS2	2.5W	2.6 W						
	WW2A / NWW2A	2.5W	2.6 W						
	WW3 / NWW3	3W	3.2 W						
	WWS3 / NWWS3	3W	3.2 W						
	WW3A / NWW3A	3W	3.4 W						
	WW4 / NWW4	4W	4.3 W						
	WWS4 / NWWS4	4W	4.3 W						
	WW5 / NWW5	5W	5.1 W						
	WWS5 / NWWS5	5W	5.1 W						
	WW7 / NWW7	6.5W	7.2 W						
	WWS7 / NWWS7	6.5W	7.2 W						
	WW7B / NWW7B	7W	7.7 W						
	WW10 / NWW10	10W	11.0 W						
	WWS10 / NWWS10	10W	11.0 W						
	MWW1 / NMWW1	1W	1.3 W						
	MWW3 / NMWW3	3W	3.2 W						
	MWW5 / NMWW5	5W	5.5 W						
	MWW10 / NMWW10	10W	11.0 W						

Code	Description	Size	Quantity
		WW12 / NWW12 WW1 / NWW1 WWS2 / NWWS2 WW1A / NWW1A MWW1 / NMWW1	2,500
		WW2 / NWW2 WWS3 / NWWS3 WW2A / NWW2A WW3 / NWW3 WWS4 / NWWS4 MWW3 / NMWW3	2,000
		WW3A / NWW3A WW4 / NWW4 WWS5 / NWWS5 WW5 / NWW5 WWS7 / NWWS7 WW7 / NWW7 WW7B / NWW7B WWS10 / NWWS10 MWW5 / NMWW5	500
		WW10 / NWW10 MWW10 / NMWW10	250

Legacy Part Number (before January 3, 2011):

SEI Type	Code	Nominal Resistance	Tolerance	Packaging
WW	1	10K	1%	R

Type	Description	Tolerance	Types	Qty	Description	Code
WW	Standard	0.1%	WW12, NWW12, WW1, NWW1, WWS2, NWWS2	2,500	11" reel tape	R
WWS	Mini	0.5%	WW1A, NWW1A, MWW1, NMWW1			
MWW	Molded	1%	WW2, NWW2, WWS3, NWWS3, WW2A, NWW2A	2,000		
NWW	Non-Inductive	5%	WW3, NWW3, WWS4, NWWS4, MWW3, NMWW3			
NWWS	Mini Non-Inductive		WW3A, NWW3A, WW4, NWW4, WWS5, NWWS5 WW5, NWW5, WWS7, NWWS7, WW7, NWW7 WW7B, NWW7B, WWS10, NWWS10 MWW5, NMWW5	500		
			WW10, NWW10, MWW10, NMWW10	250		