
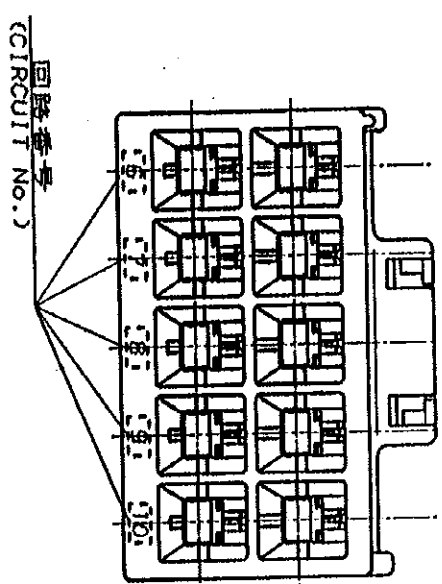
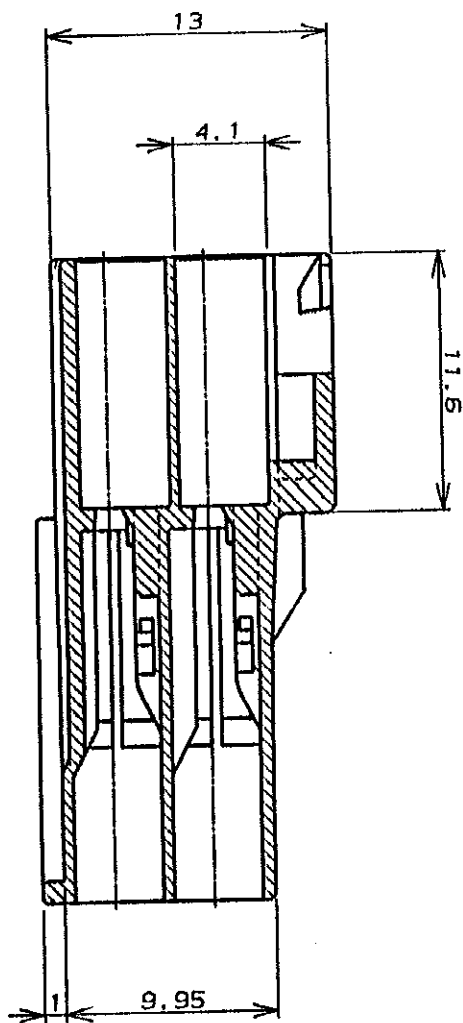
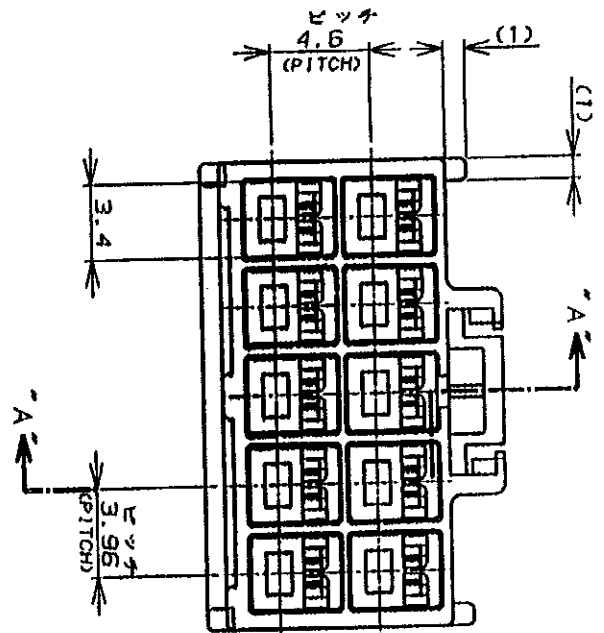


単位: ㎜ DIMENSIONS IN MM. DO NOT SCALE PRINT

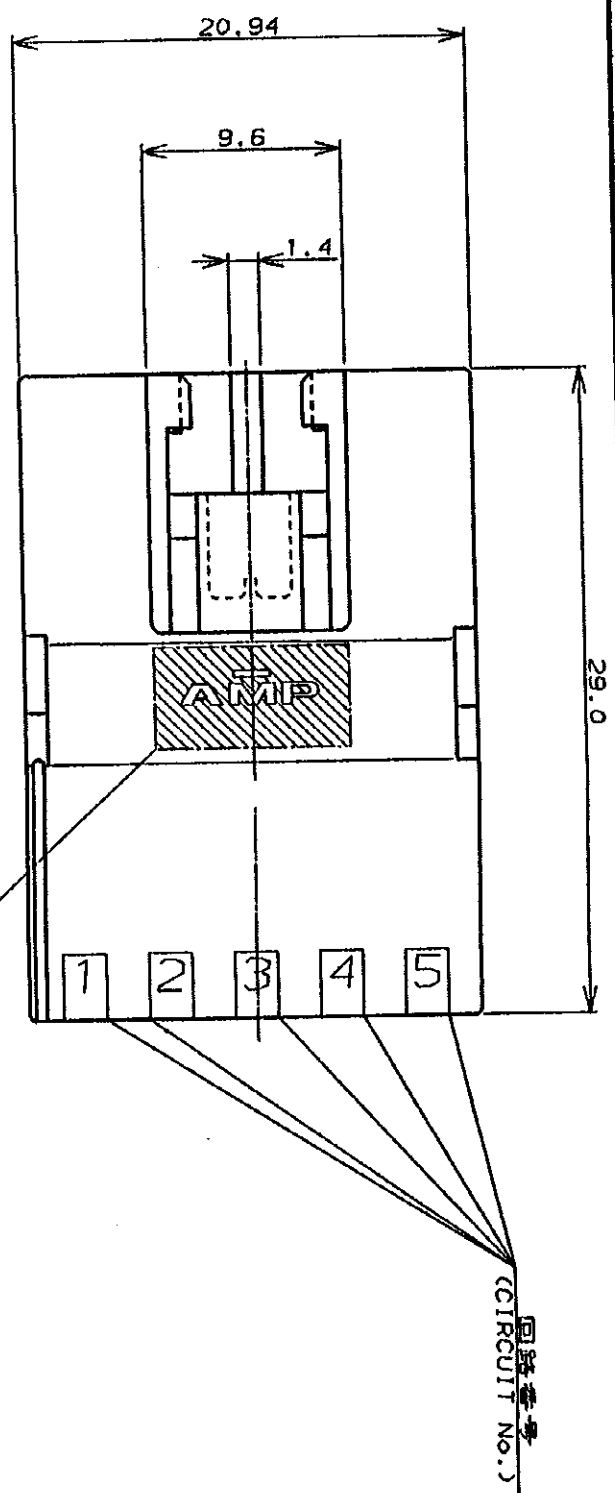

- 注:
- 1. 適用製品規格: 108-5302
 - 2. 適用コネクタ型番
プラグ・コネクタ: 175150-11C(20-16AWG)
175149-11C(26-22AWG)
 - 3. 嵌合相手側製品型番
プラグ・ハブコネクタ: 176277-11
リセ・コネクタ: 175152-11C(20-16AWG)
175151-11C(26-22AWG)
 - 4. 取扱説明書: 15-503J

- NOTES:
- 1. PRODUCT SPEC.: 108-5302
 - 2. APPLICABLE CONTACT P/N
TAB CONTACT: 175150-11C(20-16AWG)
175149-11C(26-22AWG)
 - 3. MATING CONN. P/N
PLUG HSG: 176277-11
REC CONTACT: 175152-11C(20-16AWG)
175151-11C(26-22AWG)
 - 4. INSTRUCTION SHEET: 15-503J

LTR 変更 (REVISION RECORD)				DR	CHK	DATE	CIRCUIT No.			
A	変更	J-12948	Y.N.	11/23/89		11/23/89	1	2	3	4
O	作	J-12204	M.S.	11/28/89		11/28/89	5	6	7	8

材料 (MATERIAL)				仕上 (FINISH)			
絶縁体 (INSULATION DIA.)				絶縁体 (INSULATION DIA.)			
6/5 プラスチック (UL94V-0)				6/5 プラスチック (UL94V-0)			
DR. M. SHINDO				DR. M. SHINDO			
CHK. Y. FUJITA				CHK. Y. FUJITA			

仕様 (SPEC.)				公差 (TOLERANCE)			
3.95mm ± 0.2				3.95mm ± 0.2			
10.0mm ± 0.25				10.0mm ± 0.25			
10.0mm ± 0.3				10.0mm ± 0.3			

SIZE	LOC	REV.	SHEET
A3	J	A	1 OF 1

AMP
Tokyo, Japan