

Construction

- RM 4 LP ferrite core
- 6 gullwing terminals

Features





- Use in TE and PBX
- Remote power feeding to TE
- Matched to the following Siemens ICs:
 PEB 2095, PEB 20950

Packing

- 24-mm blister tape
- Packing unit: 300 pcs.

Transformation ratio

$$N_1 : N_2 : N_3 = 1 : 1 : 4$$

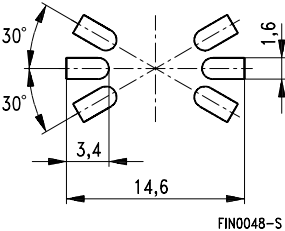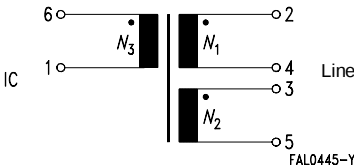

Recommended pad arrangement

Technical data

Type	I_{DC} mA	L_H mH	L_S μ H	C_K pF	R_{CuN} Ω	R_{CuIC} Ω	V_P kV _{AC}	Ordering code
RM 4 LP	140	$2,2 \pm 10 \%$	30	70	4,7	22	0,5	B78381-A1134-A3